

**ORDINANCE NO. 33T  
CITY OF SUMNER, WASHINGTON**

**AN ORDINANCE OF THE CITY COUNCIL OF THE CITY OF SUMNER, WASHINGTON, ESTABLISHING A NEW CHAPTER OF THE ZONING CODE RELATED TO THE TOWN CENTER PLAN AREA AND ESTABLISHING LAND USE REGULATIONS FOR SAID AREA, WHICH CREATES CHAPTER 18.29 OF THE; AND AMENDING THE WIRELESS COMMUNICATIONS CHAPTER IN THE ZONING CODE AND AMENDING SUMNER MUNICIPAL CODE TITLE 18, AND SECTION 18.37.020; AND AMENDING ORDINANCE 2269, AND THE CITY OF SUMNER DESIGN AND DEVELOPMENT GUIDELINES; APPROVED ON OCTOBER 6, 2008, AND ADOPTING AMENDMENTS WITH THE ADDITION OF THE TOWN CENTER DISTRICTS; AMENDING THE OFF-STREET PARKING REGULATIONS IN THE ZONING CODE TO IMPLEMENT THE TOWN CENTER PLAN AND AMENDING SMC 18.42.040 AND ADDING A NEW SECTION 18.42.047 "PARKING IN TOWN CENTER PLAN AREA."**

**WHEREAS**, the City of Sumner desires to provide housing and commercial nodes near the Sumner Sounder Station to promote more transit-oriented development; and

**WHEREAS**, the City of Sumner places significant value on walkability and connectivity in the downtown. To provide a walkable and connected downtown the regulations include principles of Form-Based Code which will connect the built environment and the public space to be more place-making, walkable and connected; and

**WHEREAS**, the City has completed a public process including a public hearing with the Planning Commission on October 4, 2018, and several public meetings including October 5, 2017, February 15, 2018, and October 2, 2018; and Council public hearing on November 5, 2018; and

**WHEREAS**, in compliance with the State Environmental Policy Act (SEPA) RCW 43.21c and WAC 197-11, the City of Sumner issued a Determination of Significance on this proposal on, May 21, 2018 and scoping was conducted and comment received until June 11, 2018; and a Draft Supplemental Environmental Impact Statement (DSEIS) was issued on September 12, 2018 for a 30-day comment period ending October 12, 2018, and the Final Supplemental Environmental Impact Statement (FSEIS) on **XX, XX**; and

**WHEREAS**, the proposed updated Town Center Subarea Plan draft and 2018 Comprehensive Plan amendments and DSEIS were sent to the Washington State Department of Commerce on September 12, 2018 per RCW 36.70A.106 for a 60-day review; and

**WHEREAS**, Section 43.21C.440 of the Revised Code of Washington (RCW), Sections 197-11-164 through 172 of the Washington Administrative Code (WAC), and Section 16.04.170 of the Sumner Municipal Code (SMC) allow for and govern the adoption and application of a planned action designation under SEPA; and

**WHEREAS**, the designation of a planned action expedites the permitting process for projects of which the impacts have been previously addressed in a supplemental environmental impact statement (SEIS); and

**WHEREAS**, the City of Sumner established a public participation plan pursuant to RCW 36.70A.130(2)(a) and provided notice to all persons requesting notice of a comprehensive plan amendment update and provided opportunity to comment; and

**WHEREAS**, the Sumner Design and Development Guidelines regulate new development within the City of Sumner; and

**WHEREAS**, the City of Sumner desires to provide housing and commercial nodes near the Sumner Sounder Station to promote more transit-oriented development; and

**WHEREAS**, the City of Sumner places significant value on walkability and connectivity in the downtown. To provide a walkable and connected downtown the regulations include principles of Form-Based Code which will connect the built environment and the public space to be more place-making, walkable and connected; and

**WHEREAS**, the City Council adopted updates to the Town Center Plan, a transit oriented development district within ½ mile walking distance to the regional Sounder commuter rail station; and

**WHEREAS**, the City of Sumner places significant value on walkability and connectivity in the downtown; and

**WHEREAS**, the demand for off-street parking in transit oriented areas is substantially less than traditional suburban developments where abundant free parking is the norm; and

**WHEREAS**, the City Council wishes to strike a balance between the amount of parking needed to accommodate residents, employees, and customers while at the same time not requiring more parking than is necessary; and

**WHEREAS**, structured parking is more expensive to build than surface parking and therefore is a substantial cost to developers and parking requirements that demand too much parking can be a detriment to development and redevelopment of multifamily housing and commercial spaces; and

**WHEREAS**, the proposed regulations strike a balance, based on research of surrounding jurisdictions, interviews with developers, and real estate professionals and community input; and

**WHEREAS**, the Planning Commission on October 18, 2018 approved with a unanimous vote a recommendation that the City Council adopt the updated Town Center Subarea Plan; and

**WHEREAS**, the City Council has found the updated Town Center Subarea Plan and subsequent Comprehensive Plan amendments to be consistent with the Growth Management Act, VISION 2040 Multi-county planning policies, and Pierce County Countywide Planning Policies; and

**WHEREAS**, the City Council held a duly advertised public hearing on November 5, 2018 and held a prior study session on November 12, 2018 to deliberate and discuss alternatives; and

**WHEREAS**, the text amendment is consistent with the goals and policies of the Comprehensive Plan; and

**NOW, THEREFORE, THE CITY COUNCIL OF THE CITY OF SUMNER, WASHINGTON, DO ORDAIN AS FOLLOWS:**

**Section 1.** New Chapter 18.29 “Town Center Code” in Title 18 “Zoning” of the Sumner Municipal Code is hereby added to read as follows:

**“Chapter 18.29**

**Town Center Code (TCC)**

**Sections:**

18.29.010 Purpose.

18.29.020 Districts in the Town Center.

18.29.030 Principal uses.

18.29.040 Conditional uses.

18.29.050 Prohibited uses.

18.29.060 Performance standards.

18.29.070 Town Center Code adopted.

**18.29.010 Purpose.**

The Town Center district is intended to be a transit-oriented development area with a mix of residential, commercial, retail and civic uses that serve the neighborhood and the larger region with goods and services. The Town Center features a wide range of types of uses, from multi-family, to townhouse and commercial buildings. Motor vehicles are accommodated in the street designs and parking areas, yet the Town Center district strongly promotes a pedestrian scale through building form and connections to the streetscape. The connectivity is accomplished with sidewalks, landscaping, building locations, signage and pedestrian oriented development. An improved street grid system provides efficient circulation and supports transit.

**18.29.020 Districts in the Town Center.**

The Town Center includes the West Sumner District, Riverside District, Station District and the Historic Central Business District. Each district has its own unique characteristics, whether it is the increased heights allowed in the West Sumner District, or the connection to the White River in the Riverfront District, or the proximity to the Sounder Station of the Station District, or the historic character of the Historic Central Business District. These characteristics are a primary focus in the Town Center Code.

**18.29.030 Principal uses.**

Permitted uses in the Town Center districts are as follows:

- A. Accessory parks and recreation facilities for use by on-site employees or residents
- B. Adult entertainment businesses subject to chapter 18.38 SMC
- C. Artist’s studio and workshop having a retail component
- D. Automotive and motorized vehicle sales

- E. Wireless communication facilities<sup>1</sup>
- F. Churches
- G. Existing residential dwellings lawfully constructed as of the effective date of the ordinance codifying this title.
- H. Family child care home or family child day care home in accordance with the provisions of SMC 18.16.025; and child day care centers
- I. Health and fitness club
- J. Hospitals
- K. Hotels, bed and breakfasts and tourist homes
- L. Multifamily dwellings, rooming houses and boarding houses, retirement homes, assisted living facilities, continuing care communities, board and care homes, hospices, or nursing homes
- M. Private clubs, lodges, fraternal organizations, union halls and social halls
- N. Professional Offices
- O. Public off-street parking lots
- P. Restaurants
- Q. Retail
- R. Streets
- S. Taverns, micro-breweries, brewpubs, and bars
- T. Theaters and other enclosed commercial recreation establishments such as bowling alleys and arcades
- U. Vocational or fine arts school
- V. Funeral homes, mortuaries, and funeral parlors

<sup>1</sup>Not involving operations or equipment that would cause excess noise, vibration, light, glare, or odor.

#### **18.29.040 Conditional uses.**

Conditional uses allowed in the Town Center districts are as follows:

- A. Churches
- B. Cemeteries
- C. Major utility facility
- D. Mass transit systems including, but not limited to, bus stations, train stations, transit shelter stations, and park and ride lots
- E. Public parks and public recreational facilities
- F. Public facilities
- G. Public off-street parking lots, paid
- H. Public garage
- I. Schools, colleges and universities
- J. Temporary homeless encampments in accordance with SMC 18.36.060
- K. Water towers and water supply plants

#### **18.29.050 Prohibited uses.**

Any use or structure not listed under permitted principal, accessory or conditional uses is prohibited in the Town Center districts unless authorized in chapter 18.36 or 18.46 SMC.

#### **18.29.060 Performance standards.**



A. Required Landscaping. For each development in the Town Center shall be submitted for approval by the community development director. The requirements of the city of Sumner design and development guidelines shall be met. Landscape plans shall be prepared and submitted in accordance with chapter 18.41 SMC.

B. Expansion of Specified Existing Uses. Existing residential dwellings lawfully constructed as of the effective date of this title may be maintained as follows:

1. The specified uses may expand up to 25 percent of their square footage, except that expansion shall not occur if it is necessary to purchase additional property. The expansion shall meet the development standards of the zone such as setbacks, lot coverage, and building height;

2. No additional dwelling units may be added;

3. Structures may be rebuilt after a fire or other disaster to original dimensions unless a health or safety impact would occur, provided a complete building permit application has been submitted within three years;

4. Structures that were destroyed by a fire or other disaster prior to December 3, 2018, may be rebuilt to original dimensions unless a health or safety impact would occur without any limitation on time.

C. As applicable, the provisions of the city of Sumner design and development guidelines per SMC 18.40 shall be met for new development.

D. As applicable, the provisions of the Town Center Code shall be met for new development.

**18.29.070 Town Center Code adopted.**

The city hereby adopts the development regulations published in the “Town Center Code” which shall be applied to all development within the Town Center district as shown on the official zoning map.

**Section 2.** That the Town Center Code, Exhibit A, attached hereto and incorporated by reference is hereby adopted;

**Section 3.** That section 18.37.020 “Wireless communication facilities – LDR, MDR, HDR, RP, CBD, MUD and NC zones.” in Chapter 18.37 “Wireless Communication Facilities” of the Sumner Municipal Code is hereby amended to read as follows:

**18.37.020 Wireless communication facilities – LDR, MDR, HDR, RP, CBD, ~~MUD-Town~~ Center and NC zones.**

Wireless communication facilities are permitted as principal or accessory uses in LDR- 6, LDR-7.2, LDR-8.5, LDR-12, MDR, HDR, RP, CBD, ~~MUD-Town Center~~ and NC zones subject to the provisions of this chapter and the following requirements:

A. Accessory antenna devices, parabolic antennas two feet in diameter or less, omni-directional antennas less than eight feet in length, directional antennas five feet or less in height with a combined surface area of not more than 580 square inches as viewed from any one point, and

stealth antennas are permitted subject to the performance standards set forth in SMC 18.37.040 and subject to meeting the following criteria:

1. The antenna is attached to an existing structure; and
2. The antenna does not extend more than 15 feet above the top of the structure.

B. Freestanding parabolic antennas greater than two feet in diameter and associated support structure are allowed subject to the performance standards set forth in SMC 18.37.040 and subject to meeting the following criteria:

1. The antenna and associated support structure are not located within any required landscaped setbacks, front or side yard setback, or in the area located between the front setback line and the front of the building; and
2. The antenna and associated support structure does not extend more than 15 feet above the adjoining grade.

C. Attached or freestanding antennas and associated support structures which are not specifically permitted under subsection (A) or (B) of this section or which exceed the associated criteria shall comply with the following requirements:

1. The antenna and support structure shall be subject to the maximum building height for the corresponding zone in which it is located as set forth in SMC 18.12.070(G) for low density residential zoned property, SMC 18.14.070(G) for medium density residential and high density residential zoned property and SMC 18.16.070(11) for central business district and neighborhood commercial zoned property; said height restrictions shall not be subject to granting of a variance;
2. The antenna and associated support structure shall not be located within any required landscaped setback, front or side yard setback, or in the area located between the front setback line and the front of the building;
3. The antenna and associated structure shall comply with required building setbacks and shall be set back from the required side yard setback an additional one foot for each foot of height over 10 feet;
4. The antenna and associate structure shall comply with the performance standards set forth in SMC 18.37.040; and
5. No more than one freestanding support structure shall be permitted per lot.

**Section 4.** That the City of Sumner Design and Development Guidelines, adopted in SMC 18.40.040, are hereby amended and updated as indicated in Exhibit B, attached hereto and adopted by reference.

**Section 5.** That section 18.42.040 “Required number of parking spaces” in Chapter 18.42 “Off-Street Parking and Loading” of the Sumner Municipal Code is hereby amended to read as follows:

**“18.42.040 Required number of parking spaces.**

The minimum number of off-street parking spaces shall be as follows for the listed uses except as provided in SMC 18.42.045 and 18.42.048:

A. Single-family dwellings: two for each unit;

B. Multifamily dwellings: one space per studio; 1.5 for each one or two bedroom unit; two spaces for three or more bedroom units; senior or retirement apartments one for each unit; visitor parking for any type of multifamily use at one space for every five units;

- C. Business and commercial buildings: 2.5 for each 1,000 square feet of gross floor area; in neighborhood commercial districts, the ratio shall be two parking spaces per 1,000 square feet of gross leasable commercial floor area if there is no ability for on-street parking; in neighborhood commercial districts where on-street parking is provided as a part of street improvements, one parking space per 1,000 square feet of gross leasable commercial floor area is allowable;
- D. Churches and funeral homes: one for each five persons based on occupant load;
- E. Convalescent homes, nursing homes and rest homes: one for every six beds and one space per worker on the maximum shift;
- F. Fast-food restaurants: one for each 50 square feet of gross floor area;
- G. Food stores and markets: one for each 300 square feet of gross floor area;
- H. Schools with nine through 12 grade levels: one for each staff member plus two for every five students plus designated visitor spaces at one space for each six seats in an auditorium or other places of assembly;
- I. Hospitals: one for every three beds;
- J. Hotels and motels: one for each room;
- K. Industrial buildings: one for each 1,000 square feet of gross floor area;
- L. Warehouse buildings: one for each 2,000 square feet;
- M. Office and professional buildings, banks, dental and medical clinics: 2.5 for each 1,000 square feet of gross floor area;
- N. Places of public assembly, including auditoriums, exhibition halls, community clubs, community centers and theaters: one for every four persons based on occupant load; plus one for every two employees;
- O. Restaurants: one space for every four seats, plus one space for every employee on the maximum shift;
- P. Schools, with kindergarten through 8th grade levels: 1.5 for each staff member; plus designated visitor spaces at one space for each six seats in an auditorium or other places of assembly;
- Q. Planned shopping center: four for each 1,000 square feet, plus six per 1,000 square feet of gross restaurant area, plus three per 100 seats for theater, over an initial 400 seats;
- R. Taverns: one for every four persons, based on occupant load;
- S. Manufactured home parks: two off-street parking spaces per site, and an additional one parking space per five sites provided in community parking areas distributed throughout the park;
- T. Automotive and motorized vehicle sales and rental agencies: one for each 5,000 square feet of outside sales area; plus 2.5 for each 1,000 square feet of gross floor area.
- U. Multifamily dwellings: within the Town Center Plan Area, 1.25 for each unit. Parking may be reduced to 0.85 for each unit only when the following facts and conditions are found to exist:
1. The proposal is within ¼ mile of the Sumner Sounder Station,
  2. On-street parking is available along the street frontage, and

3. A parking study is provided that shows that the proposed parking will meet the market demands of the proposed development.”

**Section 6.** That section 18.42.047 “Parking in the Town Center Plan area” in Chapter 18.42 “Off-Street Parking and Loading” of the Sumner Municipal Code is hereby added to read as follows:

**“18.42.047 Parking in Town Center Plan area.**

“A. The boundaries of the Town Center Plan area shall be defined by the Comprehensive Plan.

B. Within the Town Center Plan area, new and expanding uses are allowed an administrative waiver to allow on-street parking units to be counted towards the minimum parking requirements, provided all of the following are satisfied:

1. The proposed use is a retail, business or commercial use; business or professional office; restaurant; not automotive vehicle sales; and
2. The property owner enters into an agreement to not protest the formation of a future local improvement district to provide additional parking; and
4. Only parking units along the property frontage may be applied; and
5. The proposal will not result in the displacement of existing private parking established as accessory to an existing structure. The required parking may only be removed if such structure is similarly removed or a conditional use approval is granted.”

**Section 7. Corrections by City Clerk or Code Reviser.** Upon approval of the City Attorney, the City Clerk and the Code Reviser are authorized to make the necessary corrections to this ordinance, including the correction of clerical errors; ordinance, section, or subsection numbering; or references to other local, state, or federal laws, codes, rules, or regulations.

**Section 8. Severability – Construction.** If a section, subsection, paragraph, sentence, clause, or phrase of this ordinance is declared unconstitutional or invalid for any reason by any court of competent jurisdiction; such decision shall not affect the validity of the remaining portions of this ordinance. If the provisions of this ordinance are found to be inconsistent with other provisions of the Sumner Municipal Code, the provisions of this ordinance shall control.

**Section 9. Effective Date.** This ordinance shall be in full force and effect five (5) days from and after its passage, approval and publication, as provided by law.

Passed by the City Council and approved by the Mayor of the City of Sumner, Washington, at a regular meeting thereof this 33T day of ,

---

Mayor William L. Pugh

**ATTEST:**

**APPROVED AS TO FORM:**

---

City Clerk Michelle Converse

---

City Attorney

*First Reading:* 33T (*Postponed*)  
*Date Adopted:* 33T  
*Date of Publication:* 33T  
*Effective Date:* 33T

# TOWN CENTER CODE

Adopted: December , 2018  
**Effective: December , 2018**



CONSULTANT TEAM:

BERK Consultants

TranspoGroup

EconNW

# CONTENTS

## **Chapter 1. Introductory Provisions 1-1**

Legal Requirements	1-2
District Areas	1-4
Zones	1-6

## **Chapter 2. Administration 2-1**

Code Administration	2-2
Technical Plan Review	2-2

## **Chapter 3. Rules for All Zones 3-1**

Lot Types	3-2
Measurements and Exceptions	3-13

## **Chapter 4. Station District (SD) 4-1**

Downtown Core District	4-2
Residential Attached	4-3
Residential Multi-Unit	4-7
Commercial Mixed Use	4-11

## **Chapter 5. River District (RD) 5-1**

Riverfront District	5-2
Residential Multi-Unit	5-3
Residential Attached	5-7
Commercial Mixed Use	5-10



## **Chapter 6. West Sumner District (WSD) 6-1**

Urban District	6-2
Residential Attached	6-7
Residential Multi-Unit	6-11
Commercial Mixed Use	6-15
Shopfront Mixed Use	4-15

## **Chapter 7. Historic Central Business District (HCBD) 7-1**

Historic Central Business District	7-2
------------------------------------	-----

## **Chapter 8. Landscape 10-1**

Applicability	10-2
Buffers	10-2
Parking Lots	10-3
Structural Screening	10-5
Plant Material	10-6
Walls and Fences	10-7
Maintenance	10-7

## **Chapter 9. Site Lighting 12-1**

Applicability	12-2
Lighting Standards	12-2



# Chapter 1. Introduction

Legal Requirements.....	1-2
(1) Introduction	1-2
(2) Title	1-2
(3) Effective Date	1-2
(4) Purpose	1-2
(5) Intent	1-2
(6) Applicability	1-3
(7) Application of Chapter 38	1-3
(8) Conflicting Provisions	1-3
(9) Annual Review	1-4
District Areas .....	1-4
(1) District Areas Established	1-4
(2) Downtown District Map	1-5
Street Types.....	1-6
(1) Street Types Established	1-6
(2) Standard Specifications	1-7

## Applicability and Relationship to Other Regulations

The Town Center Code provisions herein are a chapter of Title 18, Zoning Code and the City of Sumner Design and Development Guidelines.

The City of Sumner Shoreline Master Program (SMC Title 16, Chapter II) sets forth policy and regulations for development within shoreline jurisdiction of the White River. New development within the shoreline jurisdiction is required to be in compliance with Shoreline Master Program.

The Historic Preservation Ordinance (SMC 18.39) sets forth policy and regulations for the identification, evaluation, designation, and protection of designated historic and prehistoric resources within the boundaries of city of Sumner and strives to preserve and rehabilitate eligible historic properties within the city of Sumner for future generations through special valuation, and a property tax incentive, as provided in chapter 84.26 RCW.

The Parks and Trail Plan contains future park and trail locations and supporting facilities and capital facilities plan. The document Plan identifies areas for expansion of new city owned parks and trails and identifies on-street options for bicyclists. Future potential parks and opportunity sites have been identified conceptually on the Regulating Map for reference.

## Planned Action

- A. A Planned Action Ordinance No. \_\_\_\_\_ was adopted following the preparation of a supplemental environmental impact statement (EIS) per State Environmental Policy Act (SEPA) for the Town Center subarea plan. A planned action involves detailed SEPA review and preparation of EIS documents in conjunction with subarea plans, consistent with RCW 43.21C.031 and WAC 197-11-164 through WAC 197-11-172. Such up-front analysis of impacts and mitigation measures then facilitates environmental review of

## Authority and Purpose

### (1) introduction

- A. The Town Center Plan was adopted on \_\_\_\_\_ (Ordinance No. XXXX) as a subarea plan and expresses the future vision for the downtown and areas within close walking distance of historic Main Street and the Sounder regional transit service and commuter rail station. The Town Center Area is intended to provide for mid-rise urban housing at a density that augments and supports the Main Street businesses and provides access to transit service. The vision for the Town Center Plan area is retain downtown as a valuable cultural and economic asset to the citizens of Sumner with a mix of housing, successful businesses, walkable and livable streets, ample open space and celebration of the riverfront.
- B. The purpose of the form-based code is to realize the vision for this area in the built environment through the management of building scale, bulk, frontages, streetscapes, landscaping, and private and public open-space designed to create an urban lifestyle that embodies Sumner's vision for a walkable, vibrant, and livable downtown.
- C. The goal of the Town Center is to encourage development that not only supports the station and alternative travel options, but also to further enhance Downtown in accordance with the community vision:
- Sumner, a city of excellence reinforcing its role as classic, small town Americana that goes beyond nostalgia, and
  - Sumner, a community that retains/strengthens a fully functional, "everyday" downtown.
  - Sumner, a community that provides housing for all life stages and recognizes the value of a transit station for convenience of residents.

subsequent individual development projects.

historic resources.

## (2) Effective Date

- A. This Town Center Code was adopted on XXXXX, 2018 and became effective on XXXXX, 2018.

5. Providing clear and consistent procedures for appropriate and effective public involvement in land use and development decisions.

## (3) Town Center Plan Area

- A. The Town Center Plan area is illustrated on the adopted Zoning map (Fig. XX)

## (4) Districts

- A. This Town Center Code provides the means to guide implementation of the citizen-endorsed vision for property within the following four Town Center Districts:

1. Station District and Transition Area;
2. Riverfront District;
3. Historic CBD District;
4. and
5. West Sumner District.

- B. This Town Center Code helps to foster predictable results and a high-quality public realm by prescribing the physical form of buildings and other elements and addressing the relationship between building facades and the public realm, the form and mass of buildings in relation to one another and the scale and types of streets and blocks.

## (5) Intent

- A. This Town Center Code is intended to balance conservation and development by:
1. Promoting development that maintains the Town Center position as the city's predominant economic, civic, and cultural center.
  2. Promoting development along a transit corridor that enhances their function as mixed-use, walkable centers that serve surrounding residential neighborhoods.
  3. Providing standards for compatible transitions of use, building scale and height between existing and new development.
  4. Promoting preservation and protection of

- B. This Town Center Code is intended to achieve design excellence in the built environment by:
  - 1. Providing building and site design standards that address the public aspects of private development and how building form, placement, and uses contribute to the quality of the public realm.
  - 2. Providing parking and access standards that appropriately balance pedestrian and vehicular needs and result in safe pedestrian environments of the highest quality.
  - 3. Promoting high quality innovative landscape design that advances the function and beauty of the Town Center.
- C. The Town Center Code is intended to guide the Town Center's prosperous and sustainable future by:
  - 1. Providing clear regulations and processes that result in predictable, efficient, and coordinated review processes.
  - 2. Promoting sustainable building and site design practices.
  - 3. Promoting diverse housing options.
  - 4. Providing standards for interconnected streets and development patterns that support all modes of travel (walking, bicycling, public transit, driving).
  - 5. Promoting conservation of land, energy, and natural resources.

## (6) Applicability

- A. The Town Center Code applies to all property within the Town Center Plan Areas as shown in the City of Sumner Official Zoning Map.
- B. All standards and references to streets in the Town Center Code apply to both public and private streets. Private streets must not be obstructed and must maintain vehicular and pedestrian connectivity.

## (7) Conflicting Provisions

- A. Where Sumner Municipal Code conflicts with a standard set out in the Town Center Code, the standard of this Town Center Code controls.
- B. Illustrations, photographs and graphics are included in this Town Center Code to illustrate the intent and requirement of the text. In the case of a conflict between the text of this Town Center Code and any illustrations, photographs and graphics, the text governs.

## (8) Code Review

- A. The Community Development Director will work with the Planning and Design Commissions to conduct a regular review of the Town Center Code standards and review processes.
- B. This review will include a survey of applicants who participated in the review process, a detailed review of the parking standards, and solicit the feedback of citizens.
- C. The information garnered from the survey information and staff report will be reviewed by the Planning and Design Commissions and presented by the Community Development Director to the City Council with any recommendations for changes to Town Center Code standards and review processes.

## District Areas

The Town Center Code is organized by Districts derived from existing and future neighborhood characteristics. Districts are distinguished from one another by their overall physical and functional form, including but not limited to: street and block patterns; building placement and height; diversity, distribution, and intensity of land uses; and diversity of mobility options. This approach provides a range of zoning options that set standards for new development that change based on the established District of a particular neighborhood.

### (1) District Areas Established


The following Town Center Districts are established below:

			
Station (SD)	Riverfront (RD)	Historic CBD (HD)	West Sumner (WSD)
Consists of low- to medium-intensity residential and commercial areas (up to 5 stories).	Consists of medium-intensity residential and commercial areas (up to 6 stories).	Consists of medium- to high-intensity residential (up to 4 stories) that is compatible with and maintains the historic character.	Consists of the greatest intensity and height (up to 6 stories), with the greatest variety of uses.
			
			



## (2) Town Center District Map

Form Based Code District Areas

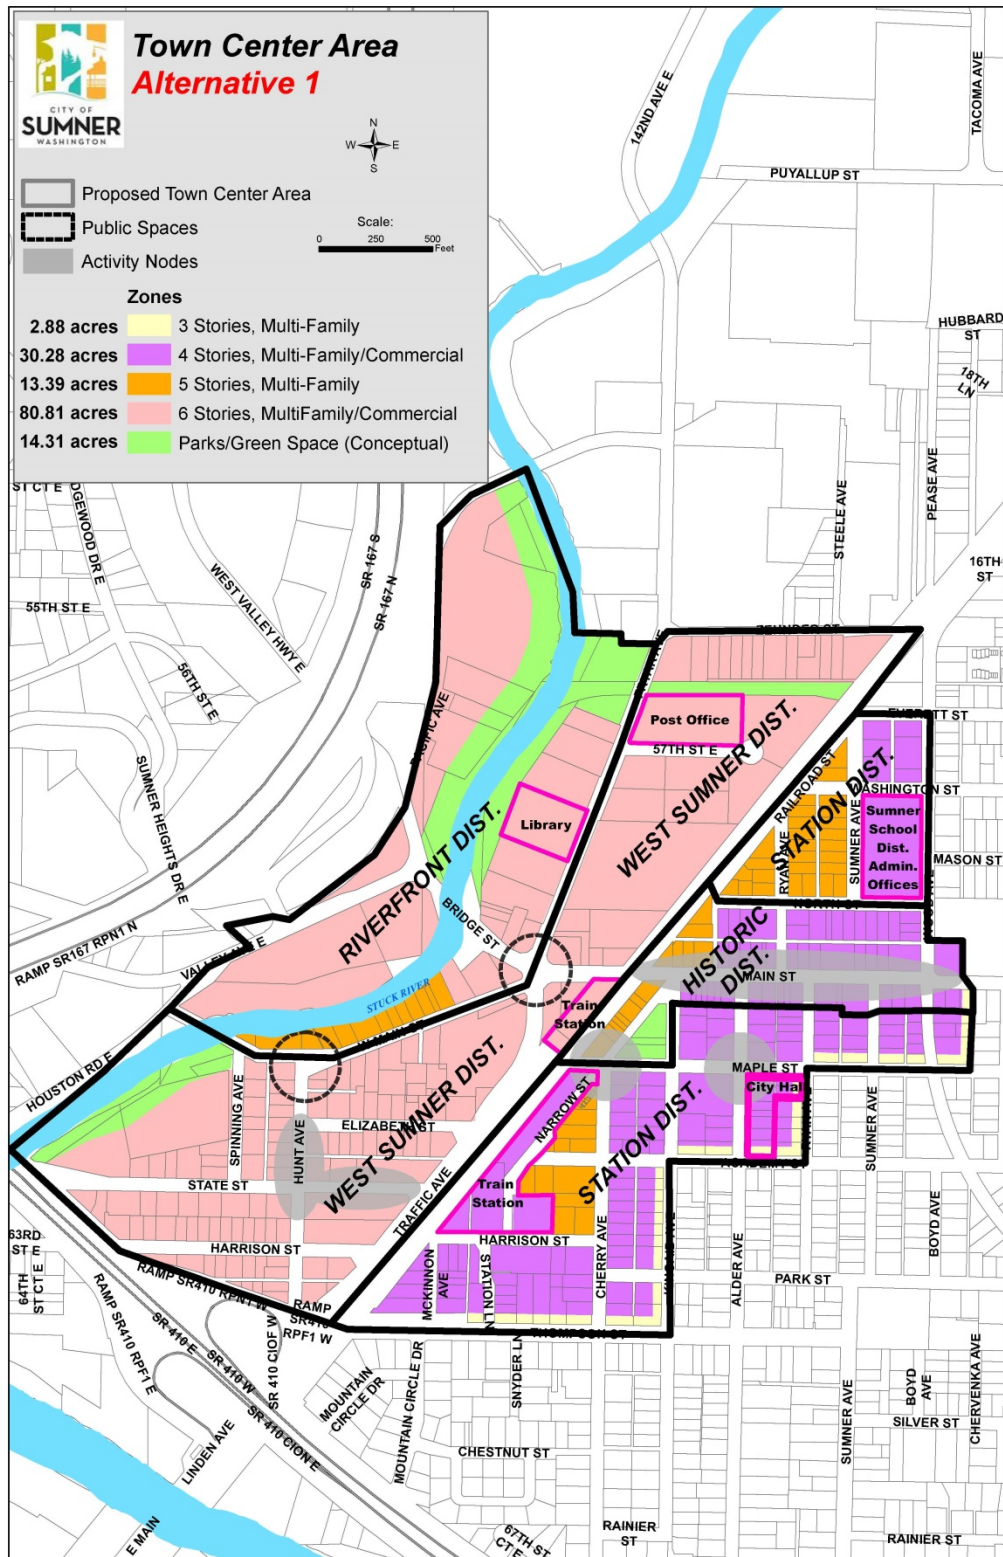





City of Sumner

## ***Town Center Area***

***"Preferred Alternative"***



## Town Center Area



## Public Spaces



Scale:  
245 490  
Feet

## Zones

**3.20 acres**

### 3 Stories, Multi-Family

**32.21 acres**


4 Stories, Multi-Family/Commercial

**11.12 acres**

**5 Stories, Multi-Family**

**95.12 acres**

6 Stories, MultiFamily/Commercial

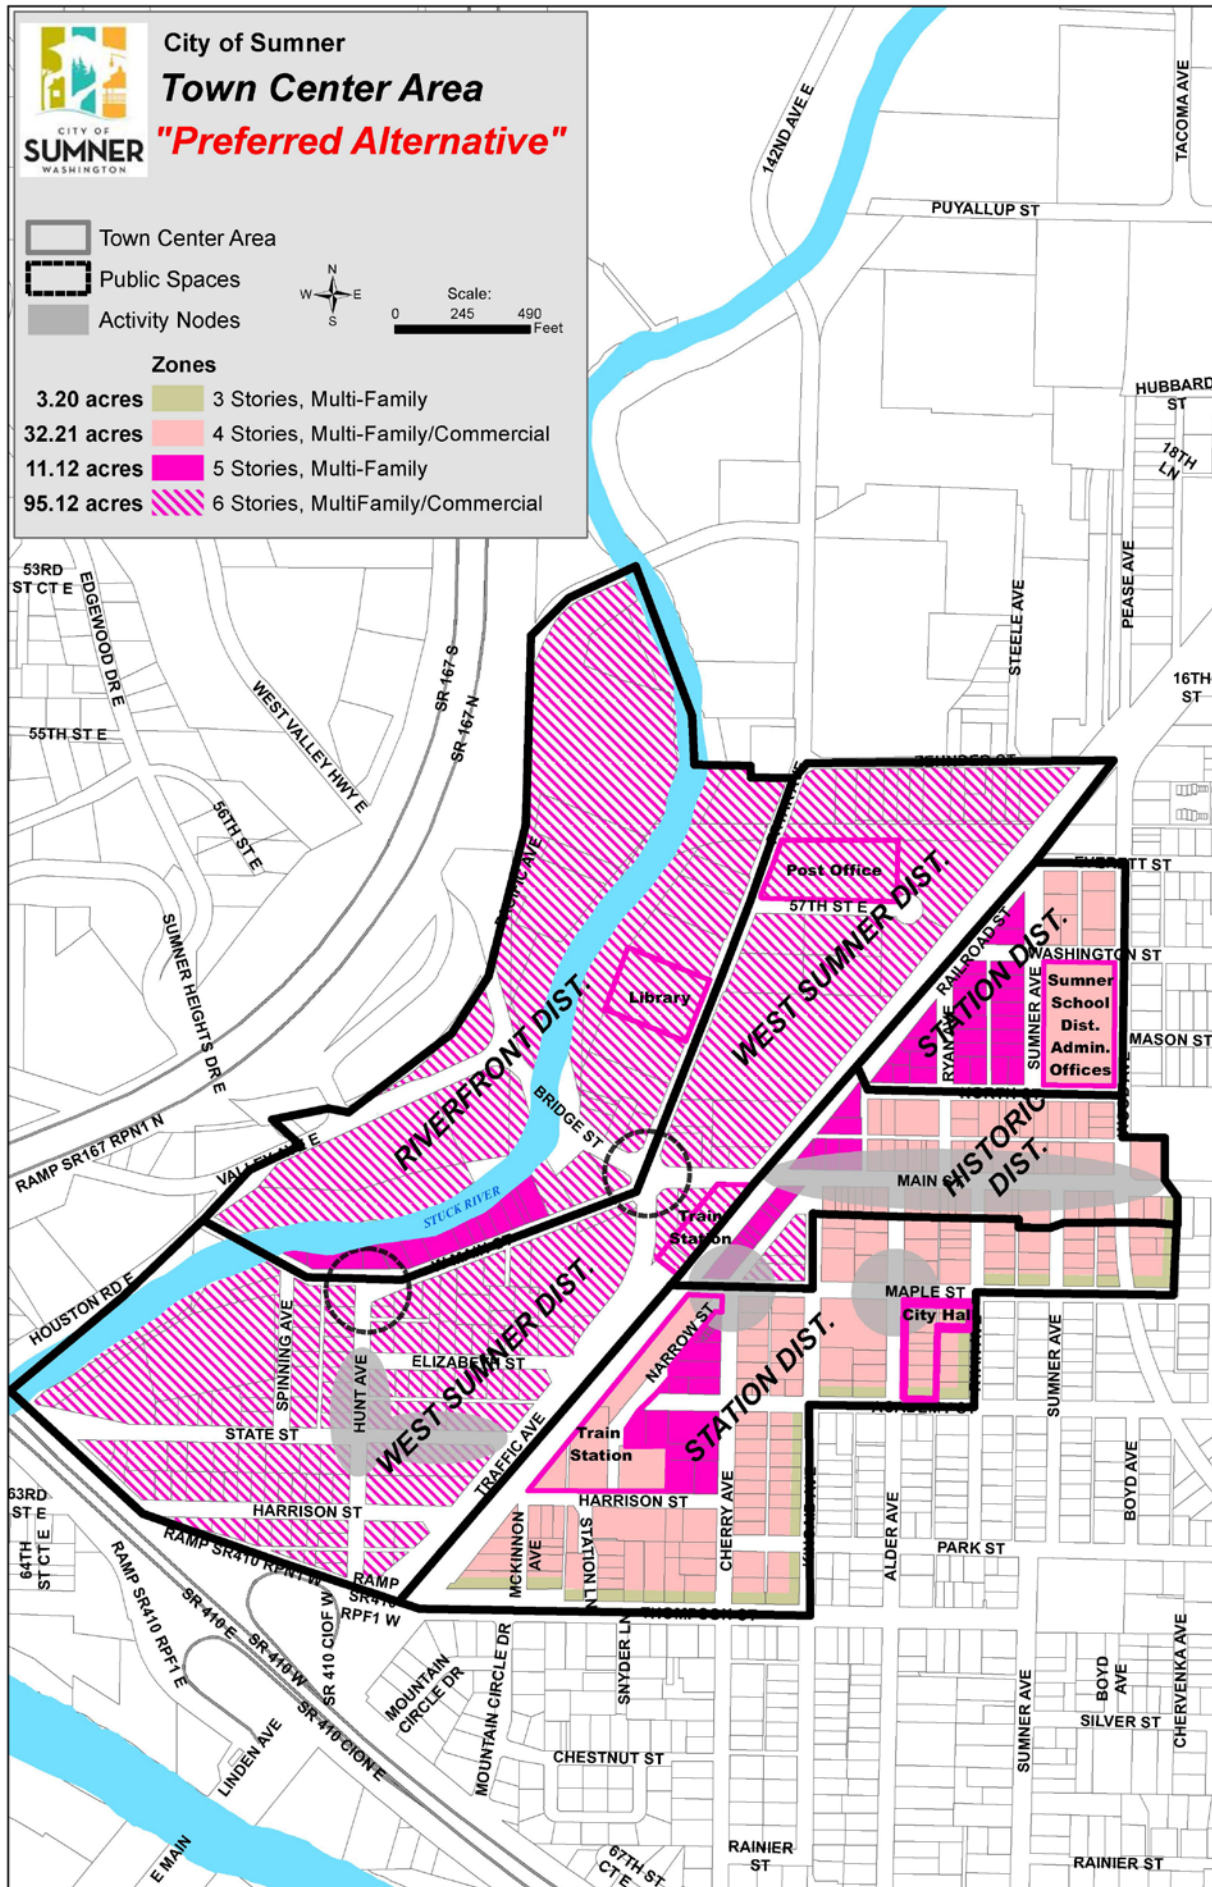



## Districts


### (1) Town Center Plan and District

The following Downtown zones, organized by District, are established below.

(1)

Height (in stories)	
STATION DISTRICT (SD)	
Station District	3-4; 3-5
Riverfront (RD)	
Riverfront	3-6
WEST SUMNER DISTRICT (WSD)	
West Sumner District	3-6
HISTORIC CBD (HCBD)	
Historic CBD	1-4; 2-5
Protected/Transition Area	2-3

(3)

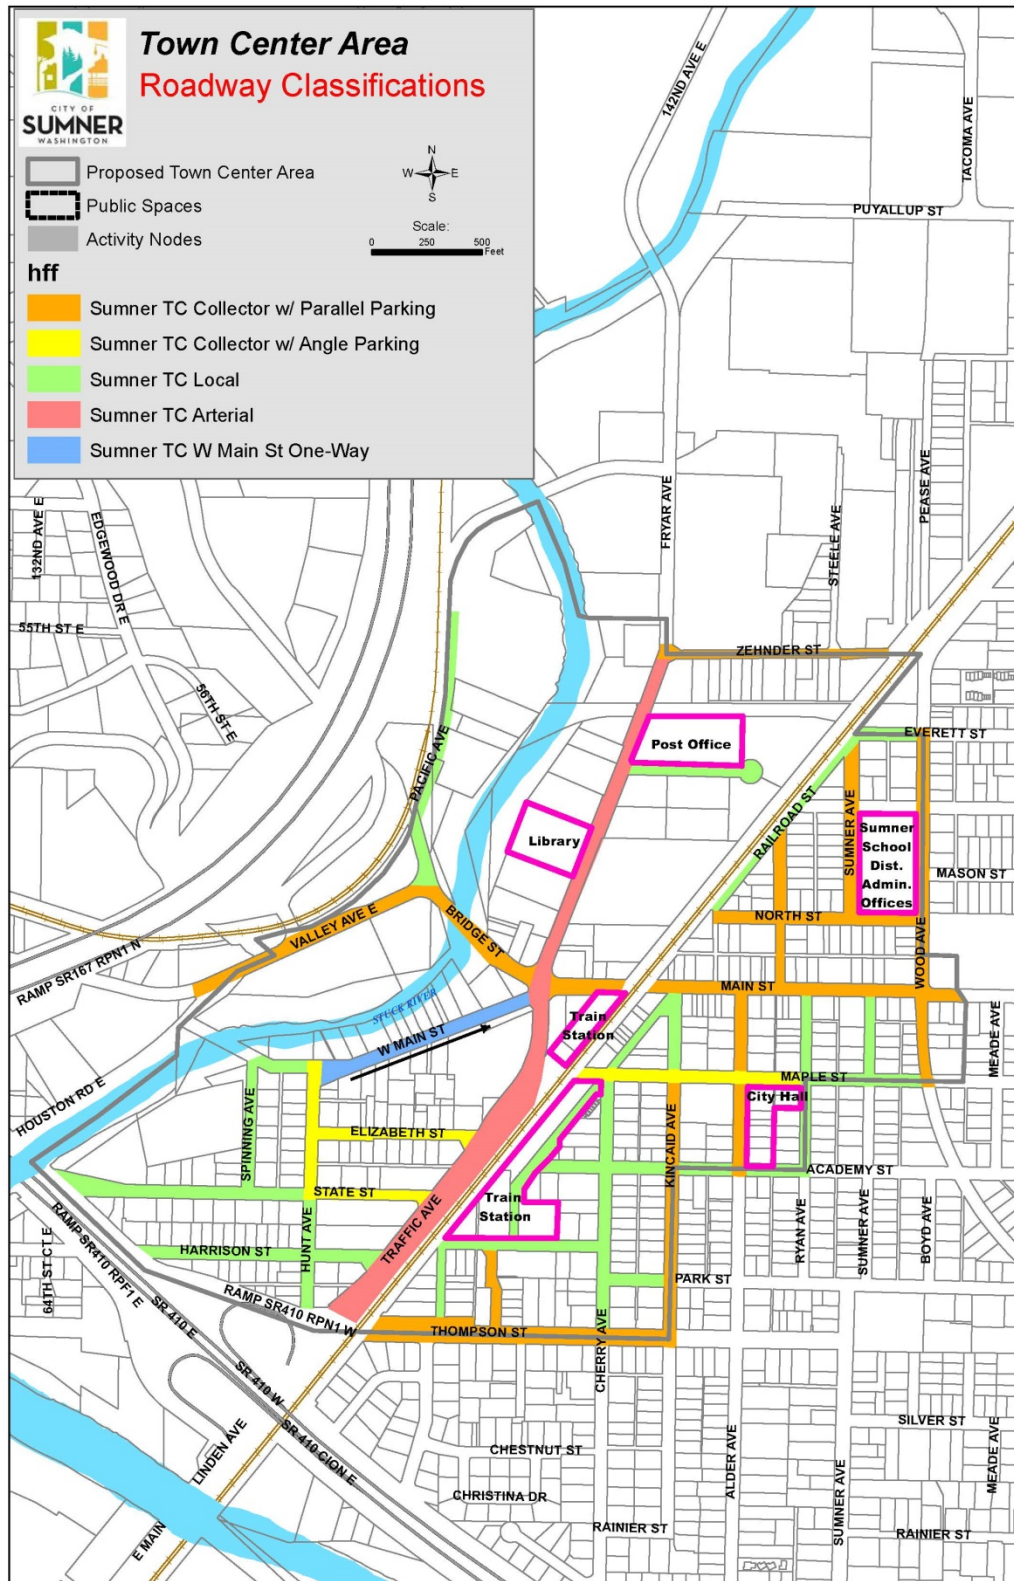





## TC Collector



*See District for Public Realm Specifications*

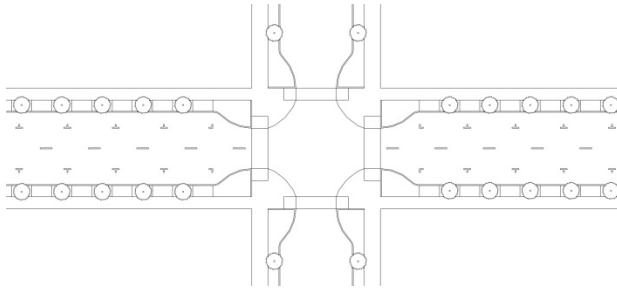

TC Collector w/ Parallel Parking

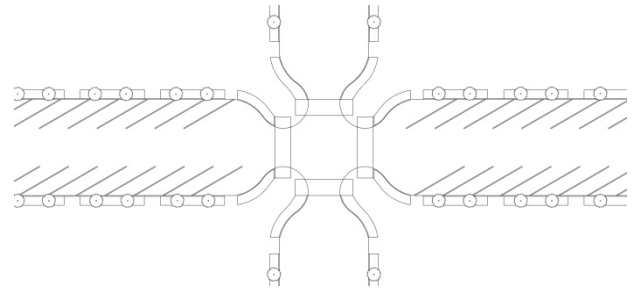


TC Collector with Angle Parking


TC Local




*See District for Public Realm Specifications*

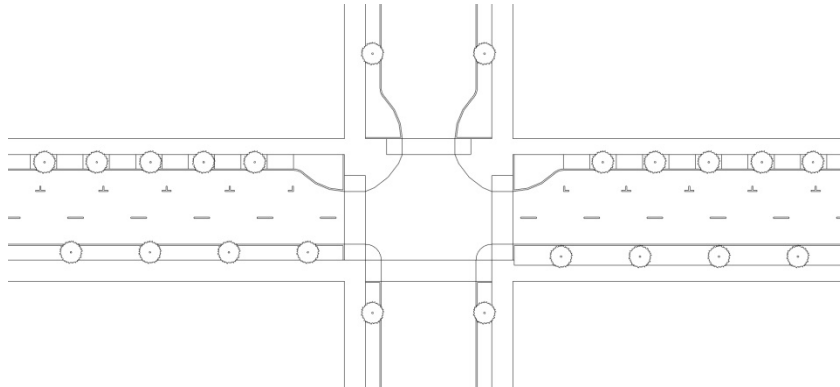

## TC Arterial

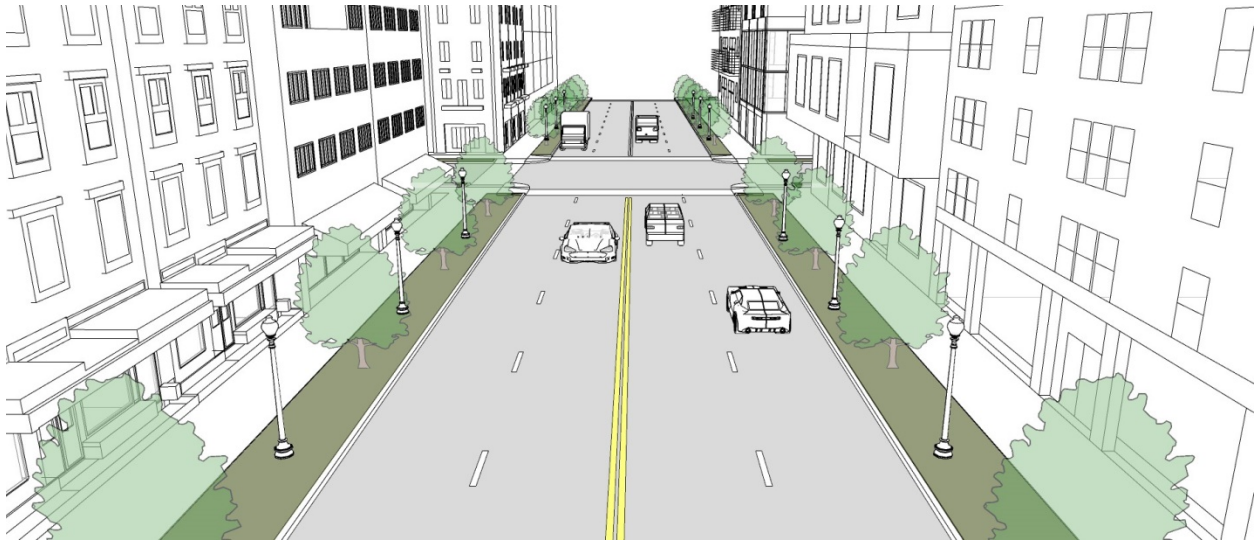

*See District for Public Realm Specifications*

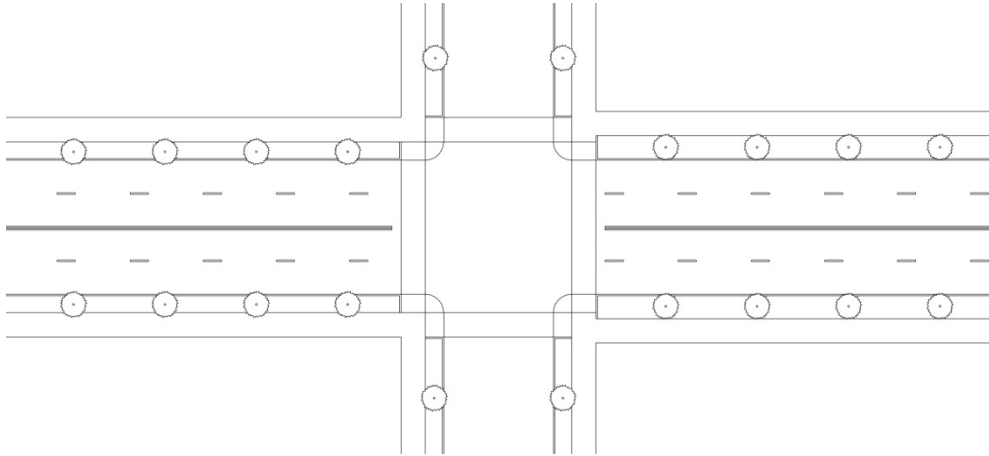

# Chapter 2. ADMINISTRATION

Code Administration .....	2-2
(1) Authority .....	2-2
(2) Delegation of Authority .....	2-2
Technical Plan Review .....	2-2
(1) Applicability .....	2-2
(2) Existing Nonconformities .....	2-2
(3) Review Process .....	2-2
(4) Code Modifications .....	2-4
(5) Design Commission .....	2-6
(6) Committee Appeals .....	2-8



## Code Administration

### (1) Authority

The Administrator of the Town Center Code is the Community Development Director (Director). The Administrator is responsible for the day-to-day administration of this Town Center Code.

### (2) Delegation of Authority

- A. The Director may designate any staff member to represent the Administrator in any function assigned by this Code. The Director remains responsible for any final action.
- B. The Director (or designee) is authorized to approve applications for Plan Review as defined below.
- C. No Certificate of Occupancy or permit may be issued for development activities until the Director has approved the plan(s) in accordance with this Chapter.

- 3. Activities exempt from Plan Review may still require building permit review.

### (2) Existing Nonconformities

The lawful use of a structure or site in place at the time of the effective date of this Town Center Code (or any subsequent amendments) is not affected by the passage of this Town Center Code, to the extent that it is a legal nonconforming use, structure or site as referenced by the following SMC 18.46 38.

### (3) Review Process

Permit review process will follow SMC 18.56.

## Plan Review

### (1) Applicability

- A. The construction, reconstruction, extension, repair, renovation or alteration of any building, structure, site, change of use or use of land is subject to the review process as set forth below.
- B. The following do not require Plan Review:
  - 1. Interior alterations/renovations that do not alter the footprint, height or exterior of a structure.
  - 2. Routine maintenance and minor repairs (such as painting, replacing roof shingles/lining to match existing, replacement of gutters to match existing) to any part of a building when there is no change in appearance

#### (4) Code Modifications

##### A. Purpose

1. The standards established in this Town Center Code are intended to achieve the following principles:
  - a. Maintain a safe, walkable and attractive urban environment along the street;
  - b. Maximize opportunities for redevelopment and investment in the Town Center;
  - c. Provide a diversity of housing options;
  - d. Promote development that will support transit and commercial services the community desires;
  - e. Protect established single-family residential areas from incompatible development;
  - f. Protect integrity of established Historic Districts and significant historic/civic landmarks;
  - g. Balance development opportunity and conservation along the riverfront by promoting development scale/form that maintains public accessibility to the river and considers public/private benefits of scenic views along the river;
  - h. Consider impacts of topography, both in terms of reasonableness of the standard when applied to a particular site and the potential impacts on adjoining properties;
  - i. Increase the tree canopy; and
  - j. Support adopted plan policies and recommendations.
2. However, specific site features (topographic changes, lot size or irregular dimension, physical barriers or easements) may create conditions that make compliance with a specific standard impractical or undesirable.

It is also recognized that alternative design solutions may achieve the principles stated above but may not comply with a specific standard. This section establishes the procedures for considering requests for a modification to the standards. These are divided into minor staff approved modifications, and major modifications approved by the Director upon recommendation by the Design Commission.

3. It is the responsibility of the applicant to meet the burden of clearly demonstrating the reason for the requested code exception and to provide sufficient documentation to illustrate how the modification is related to a site constraint and/or how the modification would equal or exceed the existing standard in terms of achieving the principles stated above.

##### B. Minor Code Modifications

During the Plan Review process, the Director is authorized to approve minor code modifications at the request of an applicant, provided the portion of property for the requested modification does not fall within 30 feet of any Low Density Residential zone. Any code modification request that falls within 30 feet of any Low Density Residential zone must be considered by the Design Commission. The Director is only authorized to take action on the merits of a specific requested code modification and is not authorized to require the applicant to offset the code modifications with additional development enhancements.

##### 1. Building Coverage

Increase of up to 5% of the maximum building coverage allowance.

##### 2. Building Setbacks

- a. Increase of up to 5 feet of a required maximum primary or side street setback.

- b. Decrease of up to 2 feet of a required minimum primary or side street setback.
  - c. Decrease of up to 2 feet of a required common lot line or alley setback. Setbacks abutting a transition zone cannot be reduced by the Director.
- 3. Lot Frontage
 

Decrease of up to 10% of a primary or side street lot frontage requirement.
- 4. Parking Setbacks
  - a. Decrease of up to 5 feet of a required primary or side street parking setback.
  - b. Decrease of up to 2 feet of a required common lot line or alley setback. Setbacks abutting a protected zone cannot be reduced by the Director.
- 5. Building Mass
 

Increase of up to 10 feet of the maximum length of a street-facing building facade.
- 6. Transparency
  - a. Decrease of up to 5% of the minimum percentage of windows and doors that must cover a street-facing building facade.
  - b. Increase of up to 5 feet of a maximum allowed blank wall area on a street-facing building facade.
- 7. Story Height
  - a. Decrease of up to 1 foot of a required minimum ground floor elevation or up to 18 inches for accessibility needs.
  - b. Increase of up to 2 feet of a required maximum ground floor elevation.
  - c. Increase of up to 5 feet of a required maximum ground floor elevation if there is a slope of 10% or greater (as measured parallel to the street).
- d. Decrease of up to 1 foot of a required minimum ground story floor height.
- 8. Pedestrian Access
 

Increase of up to 10 feet of the maximum required distance between street-facing entrances.
- 9. Sidewalk and Street Tree/Furniture Zone
  - a. Decrease the minimum Pedestrian or Street Tree zone depth in cases where insufficient right-of-way exists as measured from the street curb to the right-of-way line after consulting with the Public Works Director.
  - b. Decrease or increase tree spacing where the existing tree pattern is different, or to accommodate utilities or underground vaults after consulting with the Public Works Director.
- 10. Landscape
  - a. A reduction of up to 50% in the width of a buffer abutting a public easement or right-of-way may be granted, provided that all of the originally required landscape material is included in the reduced-width buffer.
  - b. Where conflicts arise, perimeter plantings or other required landscape abutting a street edge may be substituted for streetscape planting within the public right-of-way.
  - c. Alter the spacing of the required Interior Islands to accommodate existing healthy, high quality trees, vegetated green infrastructure, or to maintain the number of required parking spaces. The total number of required trees must still be provided and the tree spacing must still provide shade cover for the entire parking lot.

### C. Major Modifications

1. The Hearing Examiner is responsible for reviewing major modification requests that do not qualify for staff approval, and to review appeals of staff decisions/interpretations.
2. When reviewing requests for modifications, the Hearing Examiner must consider the principles stated below.
3. The Hearing Examiner's decision to approve or deny a request for a modification is based on the following considerations:
  - a. The physical conditions of the property, such as steep slopes, flood plain, drainage, or small or irregular lot shape, make compliance to the specific standard physically impossible, and this hardship is not created by the applicant; or
  - b. The applicant meets the burden of presenting an alternative means of compliance that clearly demonstrates how the code exception would equal or exceed the existing standard in terms of achieving the stated principles above; and
  - c. The modification will not significantly impact adjacent property owners, the character of the area, traffic conditions, parking, public infrastructure, water quality management, and other matters affecting the public health, safety and general welfare; and
  - d. The modification will not result in a substantial departure from the basic urban principle that buildings should directly front streets (as opposed to being set back from the right-of-way) and add value to the animation and pedestrian walkability of the street edge.

### (5) Appeals

- A. Appeals of minor modifications see SMC 18.56.160.
- B. Appeals of major modifications see SMC 18.56.170.



# Chapter 3. RULES FOR ALL ZONES

Lot Types .....3-2

(1) Purpose ..... 3-2

(2) Descriptions ..... 3-2

(3) Single-Unit Attached ..... 3-5

(4) Multi-Unit (Up to 4 units) ..... 3-6

(5) Multi-Unit (5+ units) ..... 3-7

(6) Hybrid ..... 3-8

(7) Commercial ..... 3-9

(8) Production ..... 3-10

(9) Public ..... 3-11

Measurements and Exceptions .....3-13

(1) Lot Parameters ..... 3-13

(2) Building Placement ..... 3-13

(3) Access and Parking Location ..... 3-17

(4) Height and Mass ..... 3-18

(5) Public Realm ..... 3-20

(6) Building Elements ..... 3-22

# Lot Types

## (1) Purpose

- A. Lot types establish a common vocabulary for the built environment and are used primarily to establish broad intensity and use options for each lot. For example, the Mixed-Use Lot Type allows a mixture of residential and commercial uses on a single lot, while, the Multi-Unit Lot Type (5+ units), allows any number of residential units provided they fit within the constraints of the district.
- B. Alternative configurations for each lot type are shown to encourage creative building design and to help expand housing options in the Town Center. The configurations shown are not an exhaustive list, additional configurations that fit within the rules of the zone are encouraged.
- C. Lot types are allowed by zone. Some zones allow multiple lot types.
- D. The primary constraint for each lot type is minimum lot size, which applies based on the respective zone.

## (2) Descriptions

### A. Multi-Unit (Up to 4 units)

A lot that allows up to four attached dwelling units. No commercial activity is allowed, except live/work is allowed in certain districts subject to standards that limit the scale and extent of the commercial activity.

### B. Multi-Unit (5+ units)

A lot that allows five or more attached dwelling units. No commercial activity is allowed, except live/work is allowed in certain districts subject to standards that limit the scale and extent of the commercial activity.

### C. Mixed-Use

A lot that allows a variety of permitted residential and commercial uses.

### D. Commercial

A lot that allows a variety of permitted commercial uses. No residential uses are allowed.

### (3) Two-Unit


#### A. Description

A lot that allows up to two attached dwelling units. Except for home occupations, no commercial activity is allowed.

#### B. Character Examples



#### C. Configuration Options

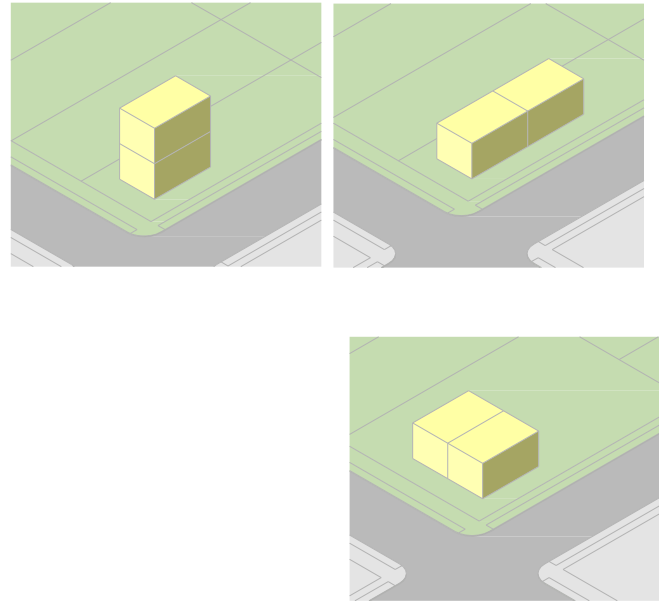

#### D. Districts Allowed

1. Station District w/in transition area
2. Riverfront



(5) Residential Attached



A. Description

A lot that allows one dwelling unit, attached on one or more sides to a single unit on an abutting lot. Also allows one detached or attached accessory dwelling unit per lot. No commercial activity is allowed, except live/work is allowed in certain zones subject to standards that limit the scale and extent of the commercial activity.

B. Character Examples



C. Configuration Options

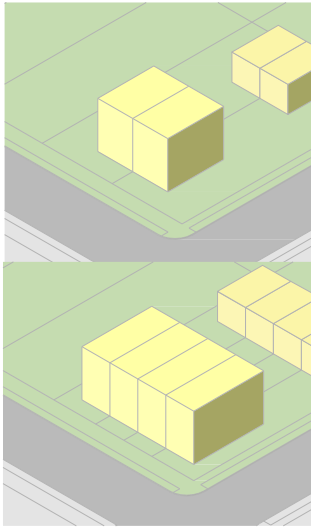

D. Districts Allowed

1. Station District
2. Riverfront
3. West Sumner
4. ~~Old Cannery~~

(6) Garden Style







A. Description

A garden apartment complex is characterized by a cluster of low-rise buildings, usually no more than two or three stories high (although more modern complexes often rise to 4-5 floors), on a single piece of property. Access to units is usually obtained via an exposed stairwell. Open lawns, landscaping, and pathways are considered common areas for apartments of these sorts, and some communities have amenities such as pools, clubhouses, playgrounds, laundry rooms (sometimes multiple) and gyms on the property as well. Parking for these units are surface parking or detached garages.

B. Character Examples



C. Configuration Options



D. Districts Allowed

1. Prohibited.

(7) Multi-Unit (5+ units)







A. Description

A lot that allows five or more attached or detached dwelling units. Commercial activity is allowed, but likely limited to live/work is allowed in certain zones subject to standards that limit the scale and extent of the commercial activity. Commercial activity is not allowed in the transition areas adjacent to LDR zoning.

B. Character Examples



C. Configuration Options



D. Districts Allowed

- 1. Station
- 2. Riverfront
- 3. West Sumner



(8) Mixed Use







A. Description

A lot that allows a variety of permitted residential and commercial uses.

B. Character Examples



C. Configuration Option



D. Zones Allowed

1. Station
2. Riverfront
3. West Sumner
4. Historic CBD

(9) Commercial


A. Description

A lot that allows a variety of permitted commercial uses. No residential uses are allowed.

B. Character Examples



C. Configuration Options

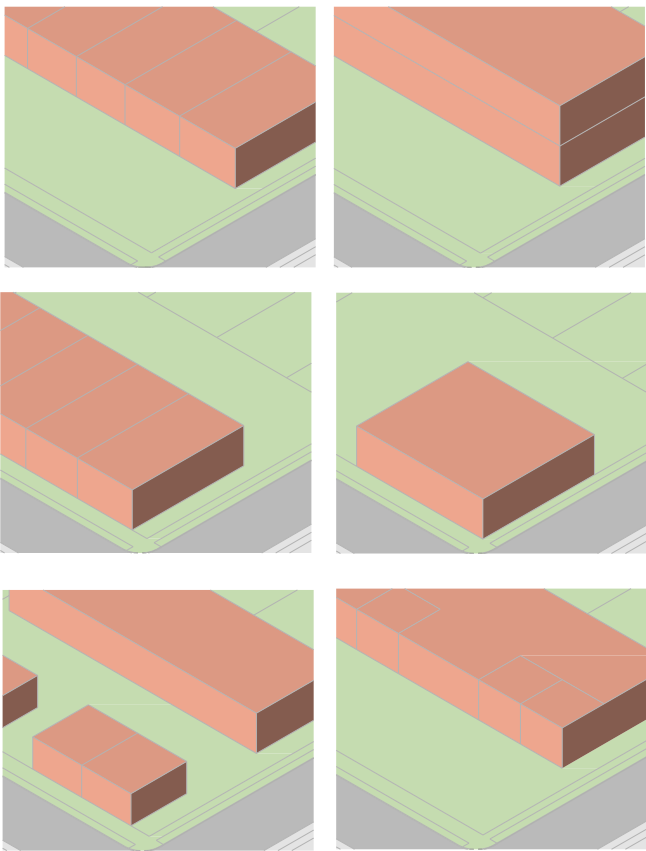

D. Zones Allowed

- 1. West Sumner
- 2. Riverfront
- 3. Station
- 1.4. Historic CBD

# Measurements and Exceptions

## (1) Building Placement

### A. Primary and Side Streets

1. Where only one street abuts a lot, that street is considered a primary street.
2. A multiple street frontage lot must designate at least one primary street. A lot may have more than one primary street. The Director of the will determine which streets are primary streets based on the following:
  - a. An A Street is always considered a primary street.
  - b. The pedestrian orientation of the street, existing or proposed;
  - c. The established orientation of the block;
  - d. The street or streets abutting the longest face of the block;
  - e. The street or streets parallel to an alley within the block;
  - f. The street that the lot takes its address from; and
  - g. The street with the highest classification or highest traffic counts.

### B. Primary and Secondary Streets


1. Streets have been mapped on Figure XX
2. Streets not mapped are considered B Streets.

### C. Setback Line

1. Building setback lines apply to both principal and accessory buildings or structures except where it explicitly states otherwise.
2. Any setback greater than 5 feet must provide an intentional public or pedestrian activity space between the building and the right-of-way, such as a park, plaza, outdoor dining, or landscaped area including shrubs and trees.




Figure Street Types


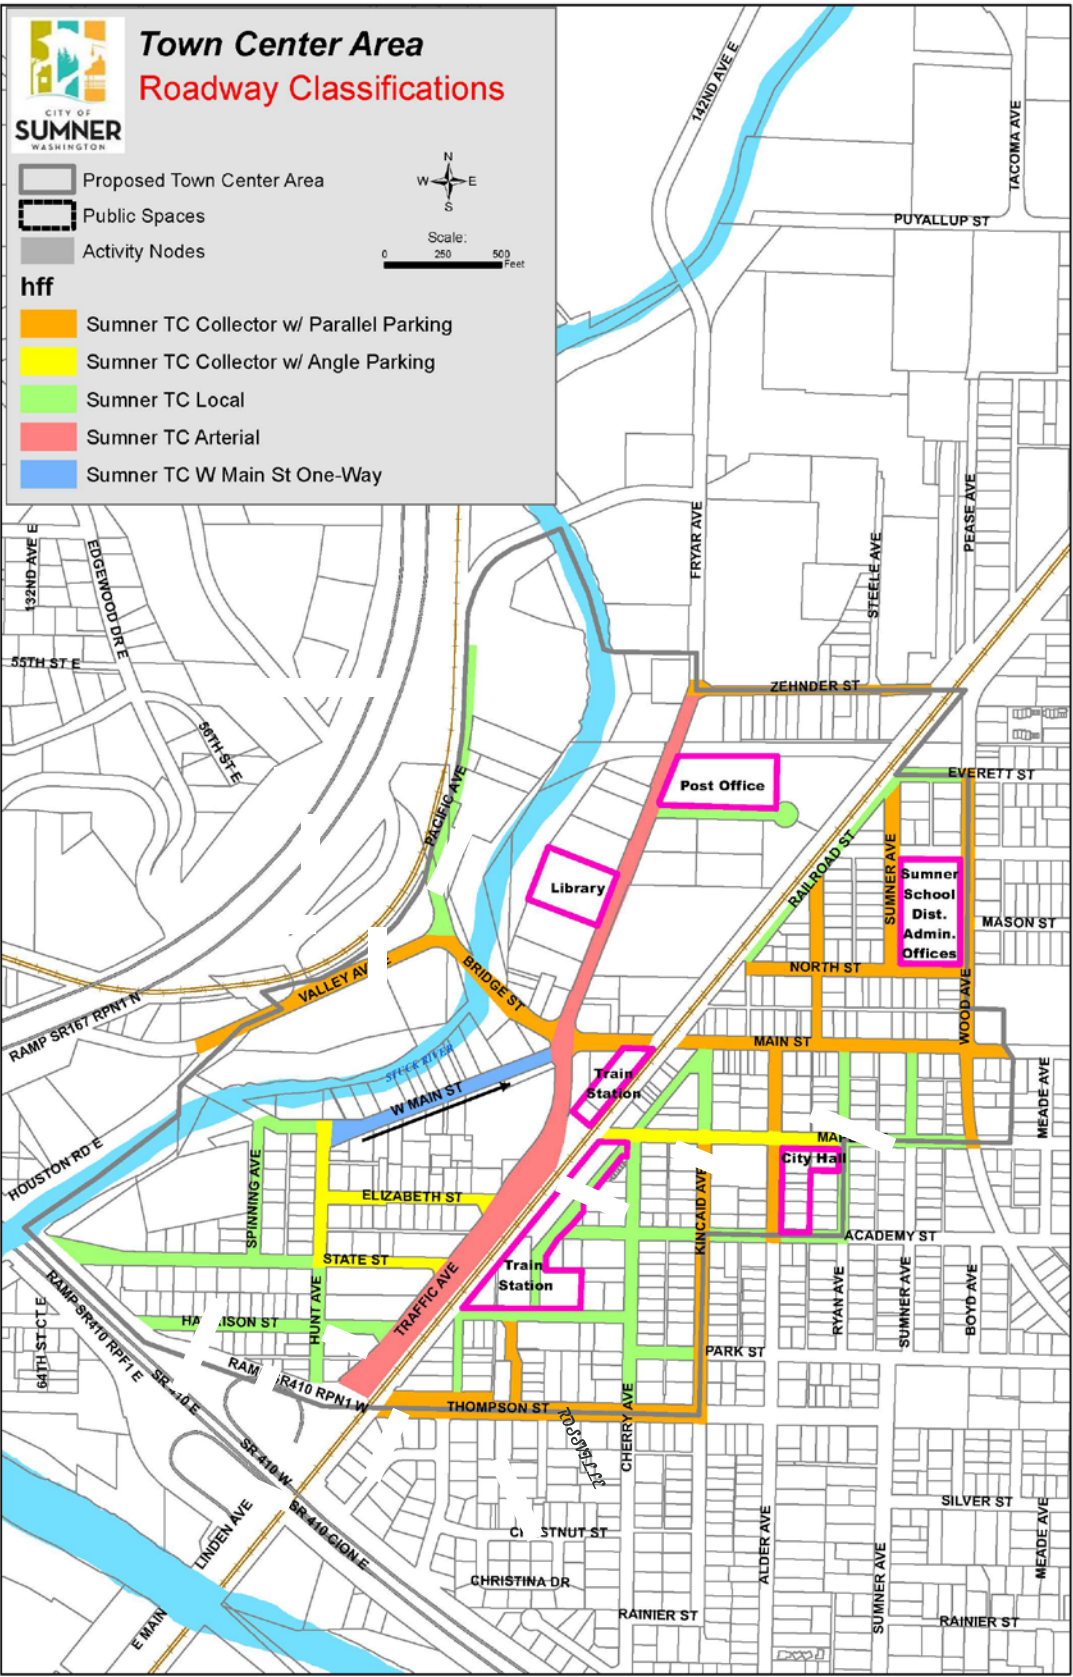


## D. Lot Frontage

1. Lot frontage is the required percentage of lot width that must be occupied by building facade between the minimum and maximum setback range.

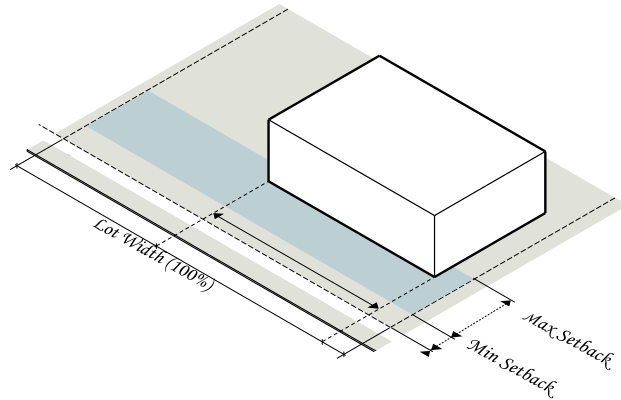

2. On a corner lot, a building facade must be placed within the minimum and maximum setback range for the first 30 feet along the street extending from the block corner, measured from the intersection of the two right-of-way lines.

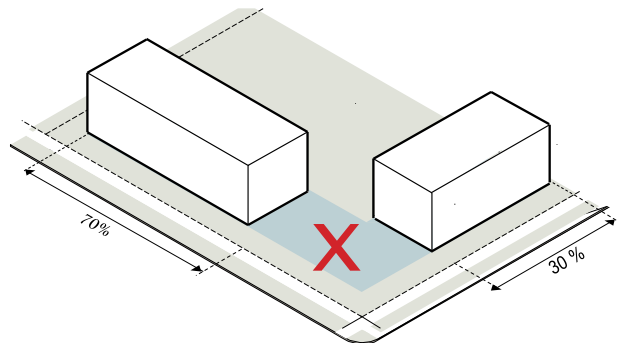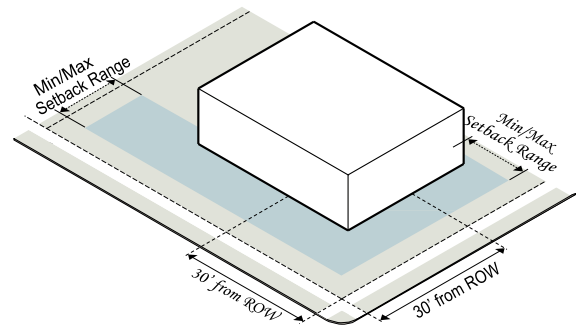

3. With the exception of parking spaces, all structures and uses allowed on the lot are allowed within the minimum and maximum setback range. Vehicle drive-thru lanes or facilities are not permitted within the




minimum and maximum setback range.

### E. Lot Frontage Requirement on Lots with Existing Buildings

When an existing building is being expanded or a new building is being constructed, and the building or lot doesn't meet the lot frontage requirement, the following provisions apply.


#### 1. Front Additions (Attached)

Any addition to the front must be placed between the minimum and maximum setback range. The addition does not have to meet the minimum lot frontage percentage for the entire lot.

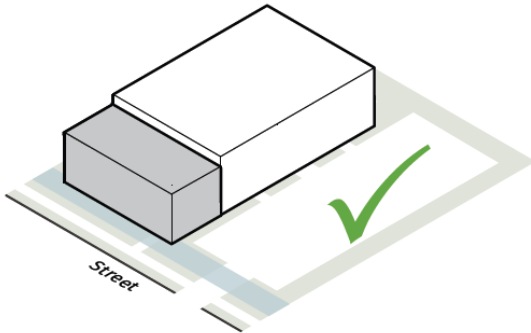


#### 2. Rear Additions (Attached)

Rear additions are allowed because the addition does not increase the degree of the nonconformity, except for single-family residential.

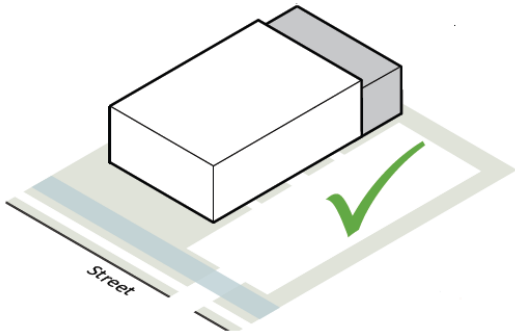


#### 3. Side Additions (Attached)

Side additions are not allowed because the extension increases the width of the building not located between the minimum and maximum setback range.

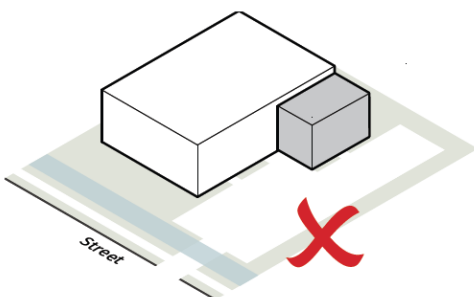


#### 4. Front: New Building (Detached)

All new buildings must be placed between the minimum and maximum setback range until the percentage for the lot has been met. The new building does not have to meet the minimum lot frontage percentage for the entire lot.

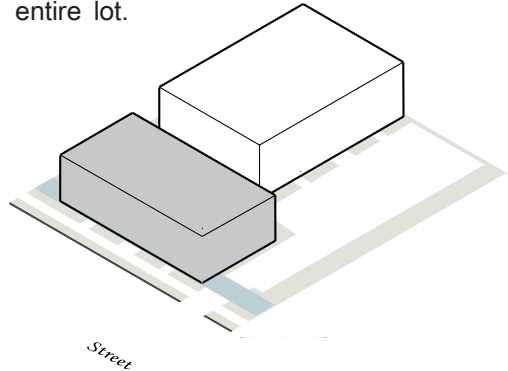


#### 5. Rear: New Building (Detached)

New buildings located outside of the minimum and maximum setback range are not allowed until the percentage for the lot has been met.

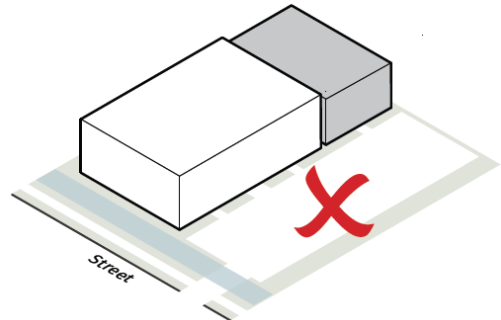

#### 6. Side: New Building (Detached)

New buildings located outside of the minimum and maximum setback range are not allowed until the percentage for the lot has been met.

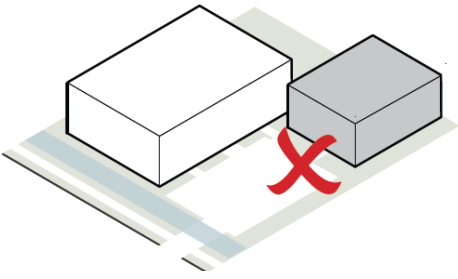

## (2) Access and Parking Location

### A. Vehicular Access

1. New curb-cuts are not permitted on Primary Streets or primary streets, except where there is no alley or side street to provide access.
2. Vehicular access must be provided via an alley when the alley is determined to be open or accessible by the Director based on the following factors:
  - a. Street type; and
  - b. Field inspection to determine potential usability.
3. In the absence of alleys, the side street, must be used as the principal vehicular access.


### B. Parking Setbacks

1. All parking spaces must be located behind the parking setback line (surface and structured). In almost all cases, this will prohibit parking between the building and the street. Parking below and covered by the ground may encroach into a required parking setback but cannot extend into a required easement or the right-of-way.

2. The parking setback applies to the ground story only.
3. Parking setbacks are measured from the right-of-way.


### C. Parking Structures

1. Parking structures must meet all the requirements for a principal structure as specified in each zone.
2. Required parking setbacks apply only to the first floor of the parking structure.
3. The ground story of a structured parking garage facing any public street (not including an alley) may have active uses (such as, but not limited to, residential, commercial, office or civic space, where permitted) within the parking setback.
4. Upper stories of structured parking must be screened so that cars are not visible from ground level view from adjacent property or from adjacent public rights-of way (not including alleys) and other public property.

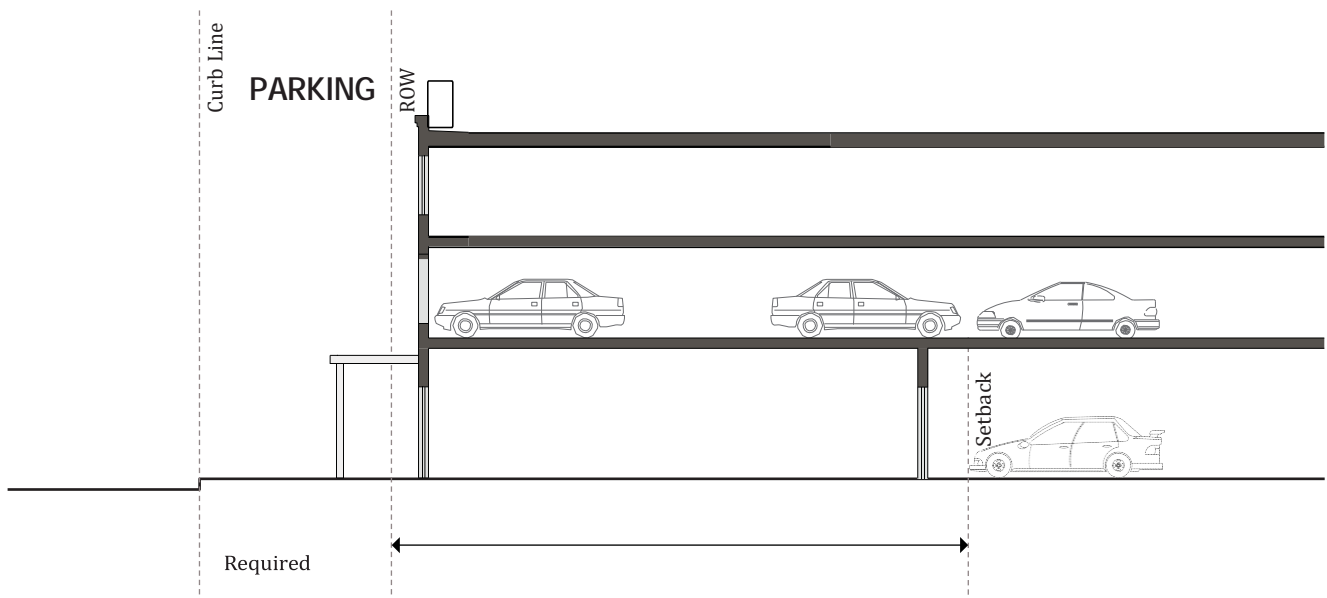

#### D. Single-Unit Attached

1. The garage must be placed entirely to the rear of the unit and be rear-accessed. The garage can be attached or detached.
2. The garage doors must face the rear alley or easement.

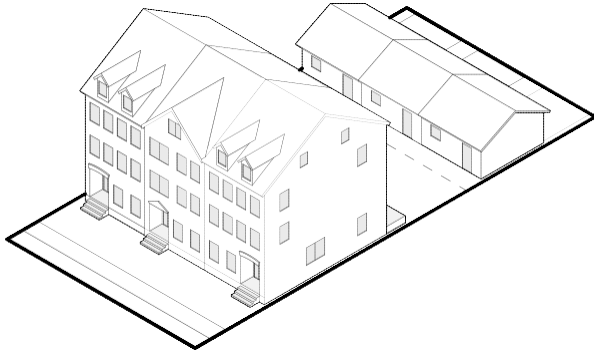


### (3) Height and Mass

#### A. Building Height

1. Building height is measured in stories in and not in feet. The intent is to allow for flexibility with market conditions for story height (residential/commercial).
2. Average grade is determined by calculating the average of the highest and lowest elevation along finished grade measured along the front of the building parallel to the primary street setback.
3. An attic does not count as a story where 50% or more of the attic floor area has a clear height of less than 7.5 feet; measured from the finished floor to the finished ceiling.

#### B. Height Abutting a Low Density Residential Zone

The maximum height of any portion of a building or structure within 30 feet of a common lot line abutting a protected/transition zone is 3 stories.

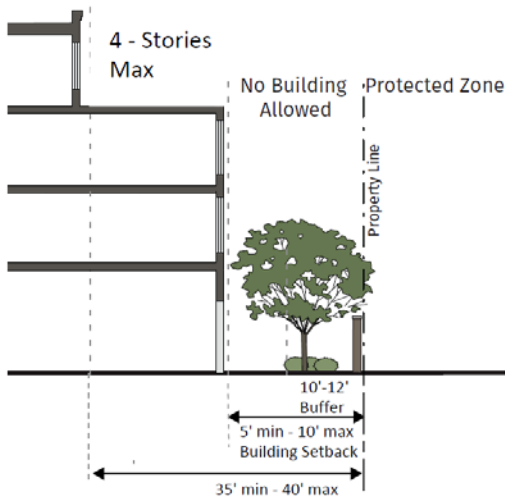

(Illustrating transition between TCP and LDR Zone)

### C. Minimum Height

The minimum height requirement applies to the first 30 feet of building depth where the building fronts a street.

### D. Building Mass

#### 1. Street-Facing Building Length

Street-facing building length is the maximum length of a building or structure.


#### 2. Articulation in Building Height

For buildings 150 feet or more in length, at least 15% of the street-facing roof line must have a variation in height of at least 5 feet. On a corner lot, the variation in height must be located at the corner of the building that addresses both street fronts.

## (4) Public Realm



### A. Transparency

1. Transparency is the minimum percentage of windows and doors that must cover a ground or upper story facade.
2. Transparency applies to primary and side street-facing building facades only.

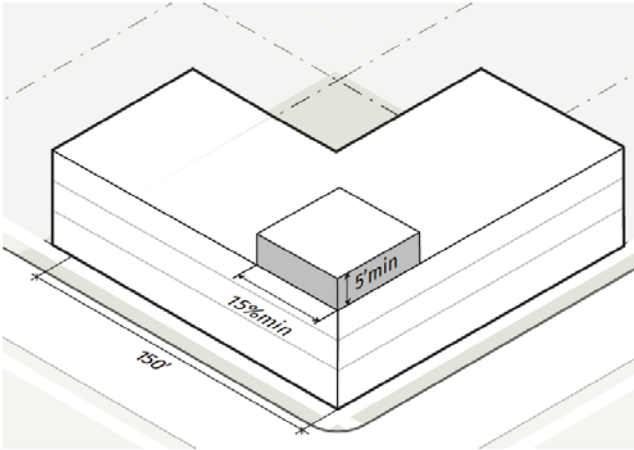

### 3. Articulation in Building Façade

For buildings 100 feet or more in length, at least 2 combination of the required variations in setback must total no less than 15% of the length of the building

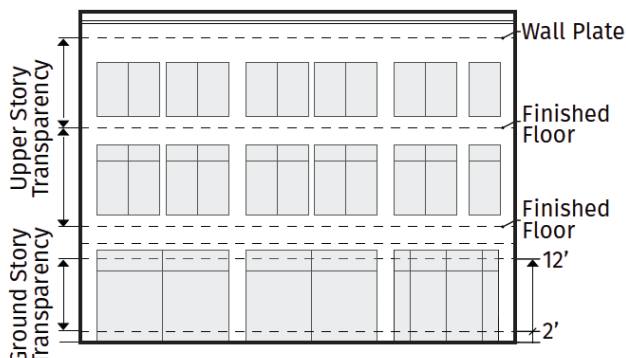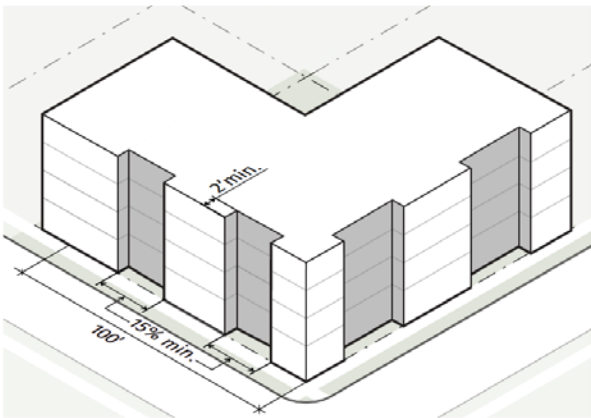


3. Glass is considered transparent where it has a transparency higher than 75%.
4. Ground story transparency is measured between

2 and 12 feet above the abutting sidewalk.

5. Upper story transparency is measured from top of the finished floor to the top of the finished floor above. When there is no floor above, upper story transparency is measured from the top of the finished floor to the top of the wall plate above.


### B. Blank Wall Length

1. Blank wall length means a portion of the exterior facade of the building that does not include: windows or doors; columns, pilasters or other articulation greater than 12 inches in depth; or a substantial material change (paint color is not considered a substantial change).
2. Blank wall length applies in both a vertical and horizontal direction, with a surface area greater than 400 square feet.
3. Blank wall length applies to ground and upper story primary and side street-facing facades.

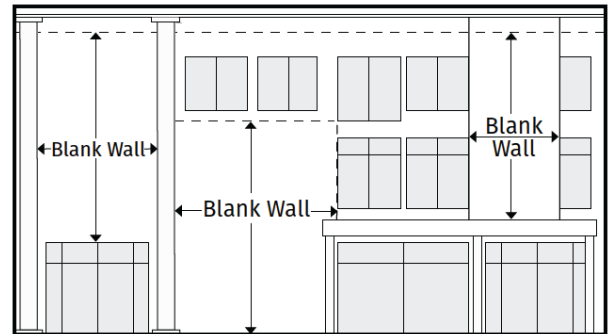


### C. Ground Floor Elevation

- A. Ground floor elevation is measured from top of the adjacent curb, or from the crown of the road where no curb exists, to the top of the finished ground floor.
- B. Minimum ground floor elevation applies to the first 30 feet of the lot measured from the right-of-way.

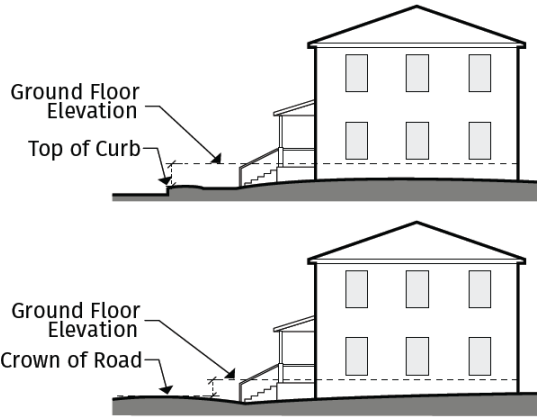


#### D. Story Height

1. Story height is the height of each story of building and it is measured from the top of the finished floor to the top of the finished floor above. When there is no floor above, upper story height is measured from the top of the finished floor to the top of the wall plate above.
2. Open structures, such as pergolas or shade devices, do not constitute a story and may be placed on building roofs. See the Building Code for any further definition of “story

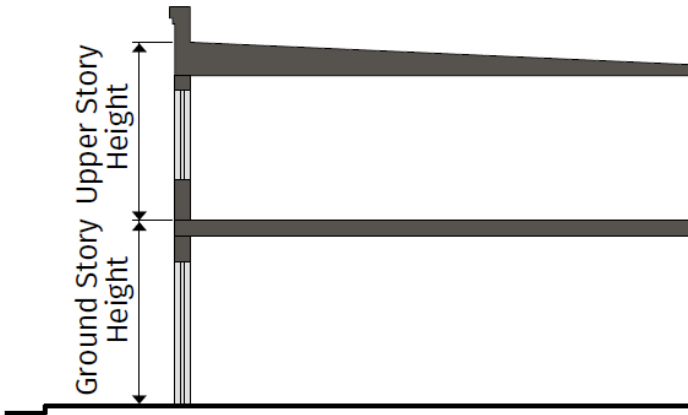

#### E. Pedestrian Access

1. An entrance providing both ingress and egress, operable to residents at all times and customers during regular business hours, is required to meet the street-facing entrance requirements. Additional entrances off another street, pedestrian area or internal parking area are allowed.
2. The entrance spacing requirements must be met for each building, but are not applicable to adjacent or abutting buildings. Entrance spacing is measured from the edge of door to the edge of the next door.
3. An angled entrance may be provided at either corner of a building along the street to meet the street-facing entrance requirements.

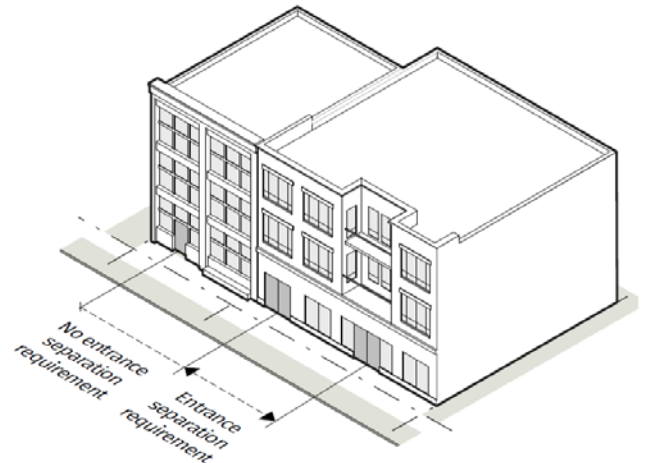

### (5) Building Elements

#### A. Intent

The following standards are intended to ensure that certain building elements when added to a building frontage are of sufficient size to be both usable and functional and be architecturally compatible with the frontage they are attached to.






### B. Awning/Canopy

A wall-mounted, cantilevered structure providing shade and cover from the weather for a sidewalk.


1. An awning/canopy must be a minimum of 9 feet clear height above the sidewalk and must have a minimum depth of 6 feet.
2. An awning/canopy may extend into a primary or side street setback.
3. Subject to the issuance of a Temporary Use Permit, an awning/canopy may encroach up to 6 feet over the right-of-way but must be at least 2 feet inside the curb line or edge of pavement, whichever is greater.

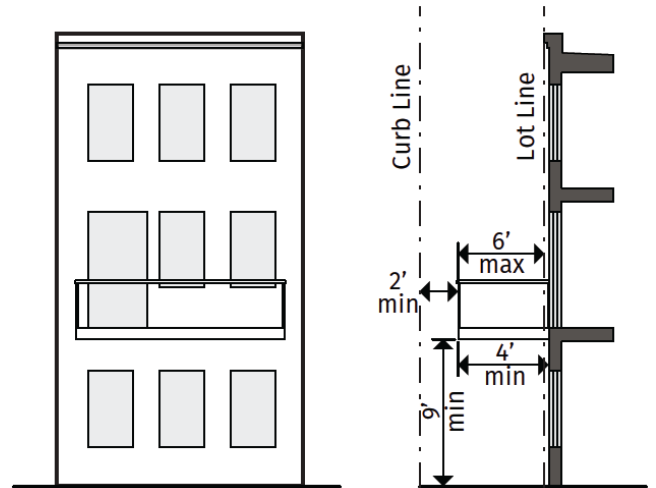

### C. Balcony

A platform projecting from the wall of an upper-story of a building with a railing along its outer edge, often with access from a door or window.


1. A balcony must be at least 4 feet deep.
2. A balcony must have a clear height above the sidewalk of at least 9 feet.
3. A balcony may be covered and screened, but cannot be fully enclosed.
4. An balcony may extend into a primary or side street setback.
5. Subject to the issuance of a Temporary Use Permit, a balcony may encroach up to 6 feet over the right-of-way but must be at least 2 feet inside the curb line or edge of pavement, whichever is greater.

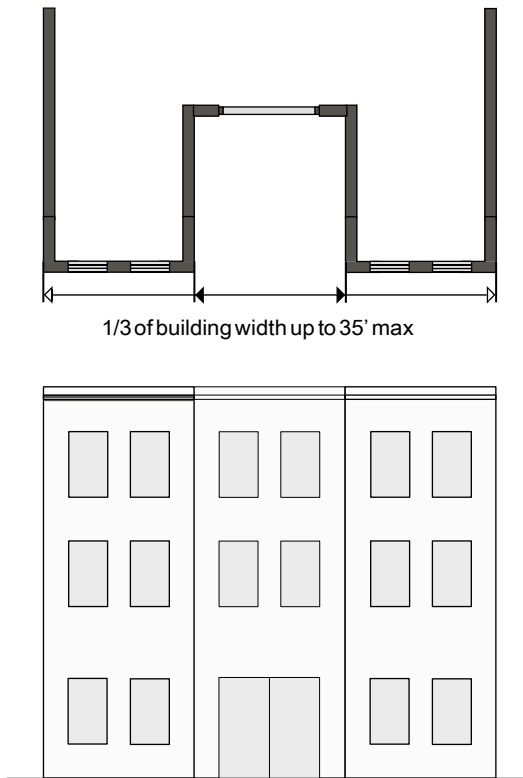

#### D. Forecourt

An open area at grade, or within 30 inches of grade, that serves as an open space, plaza or outdoor dining area.


1. A forecourt must be no more than one-third of the length of the building face, and in no case longer than 35 feet in width.
2. A maximum of one forecourt is permitted per lot.

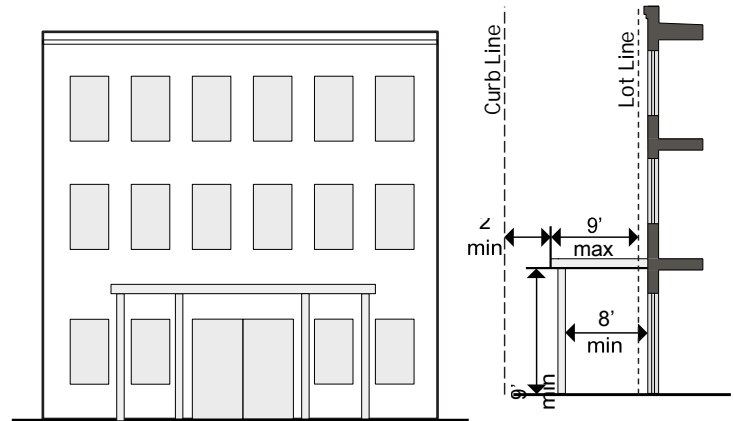

#### E. Gallery

A covered passage extending along the outside wall of a building supported by arches or columns that is open on three sides.

1. A gallery must have a clear depth from the support columns to the building's facade of at least 8 feet and a clear height above the sidewalk of at least 9 feet.
2. A gallery may extend into a primary or side street setback.
3. Subject to the issuance of a Temporary Use Permit, a gallery may encroach up 9 feet into the right-of-way but must be at least 2 feet inside the curb line or edge of pavement, whichever is greater.

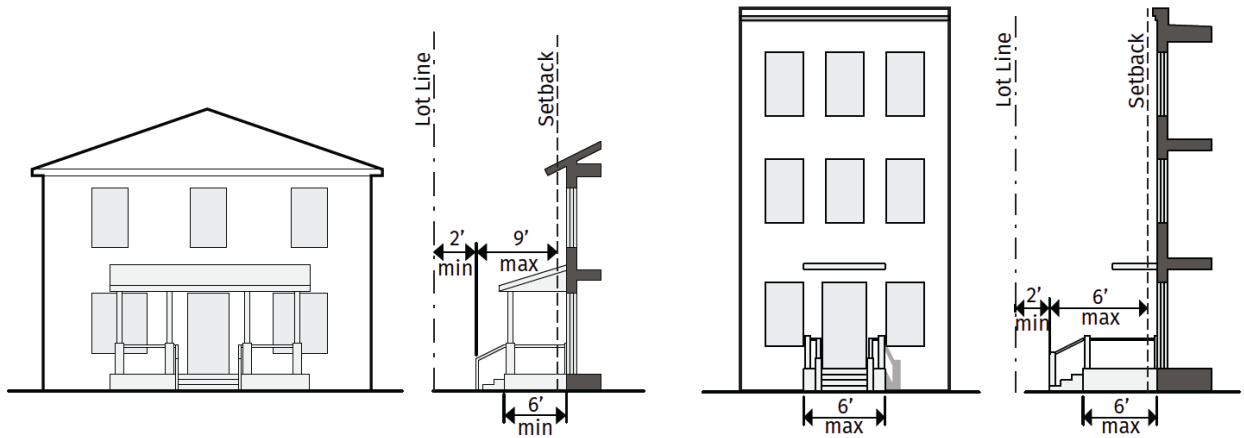

#### F. Porch

A raised structure attached to a building, forming a covered entrance to a doorway.

1. A porch must be at least 6 feet deep (not including the steps).
2. A porch must be roofed and may be screened, but cannot be fully enclosed.
3. A porch may extend up to 9 feet, including the steps, into a primary or side street setback, provided that such extension is at least 2 feet from the vertical plane of any lot line.
4. The porch and steps may not encroach into the right-of-way.

#### G. Stoop


A small raised platform that serves as an entrance to a building.

1. A stoop must be no more than 6 feet deep (not including the steps) and 6 feet wide.
2. A stoop may be covered but cannot be fully enclosed.
3. A stoop may extend up to 6 feet, including the steps, into a primary or side street setback, provided that such extension is at least 2 feet from the vertical plane of any lot line.
4. The stoop and steps may not encroach into the right-of-way.

# CHAPTER 4. STATION DISTRICT (SD)

<b>General Provisions</b> .....	4-2
(1) General Character	4-2
(2) Built Environment	4-2
(3) Streets and Blocks	4-2
(4) Parking and Mobility Options	4-2
<b>Station District</b> .....	4-3
(1) Summary	4-3
(2) Lot Parameters	4-4
(3) Building Placement	4-4
(4) Access/Parking Location	4-5
(5) Height and Mass	4-5
(6) Public Realm	4-6

# Station District – General Provisions



## (1) General Character

The Station District consists of medium- to high-intensity residential and transit-oriented areas. Multi-family housing is predominant. Commercial activity is limited to mixed use in multi-family residential buildings and hotels. Priority is given to pedestrians and bicyclists.

## (2) Built Environment

Buildings can be up to 4 and 5 stories in height and are typically built to the edge of the sidewalk (see height map). Parking must be to the rear of the building(s). Building coverage is high.

## (3) Streets and Blocks


Streets and rights-of-way are typically wide in order to accommodate the traffic associated with higher intensities. A rectilinear grid of streets frames a regular pattern of mid-sized, walkable blocks. Alleys are currently present. However will not be often present under the new vision and plan. Block shapes and sizes are relatively consistent. The typical block pattern includes detached and attached sidewalks, street trees, on- street and surface parking, and open space and landscaping. Residential and commercial access is typically via secondary streets and shared service drives to structured parking. Surface parking is severely limited.

## (4) Parking and Mobility Options

Parking is primarily provided on-street and in structured facilities. Limited surface parking is located to the rear of buildings. In street design, priority is given to pedestrians and bicyclists. There is access to multiple modes of transportation and frequent pedestrian activity.

# Station District

## (1) SUMMARY



---

### Intent

The Station District is intended to accommodate a variety of residential, retail, service and commercial building uses in a storefront environment. Uses are flexible but tall ground floors with large areas of transparent glazing are required to accommodate retail uses in the future.

---

---

### Lot Types

Mixed Use or Commercial


---

Residential Attached


---



# Mixed Use/~~Multi-Unit~~Commercial

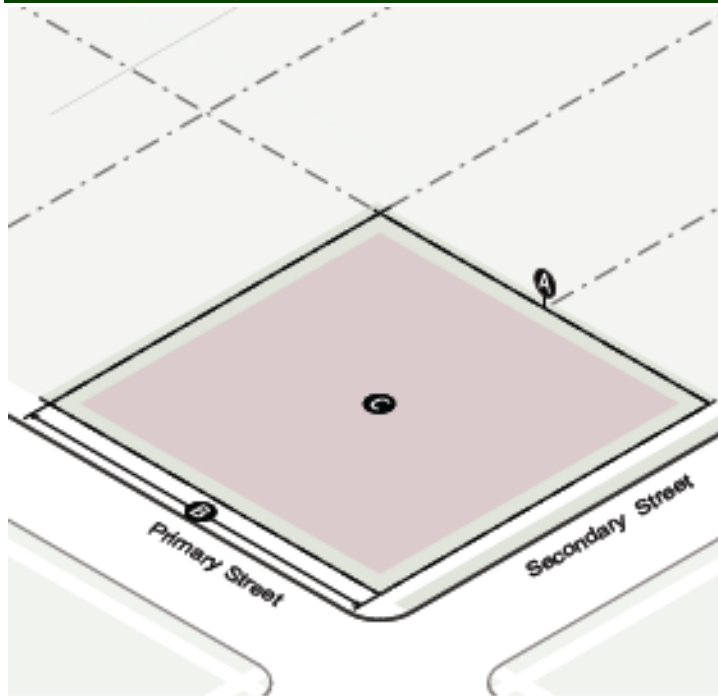

Lot	A Area	B Width
Single-unit attached	1,350 SF min	16' min
Multi-unit (up to 4 units)	n/a	n/a
Multi-unit (5+ units)	n/a	n/a
Specifications		
C Building coverage	90% max	

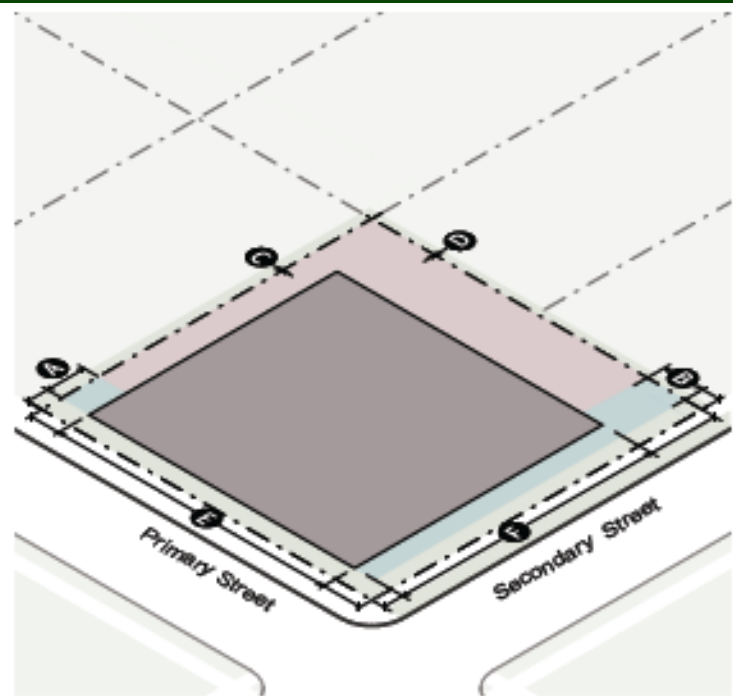


## Building Setbacks (see Sec. 38-698.(2)C.2.)

A Primary Street	0' min/10' max
B Primary Street	5' min/10' max
C Side: common lot line	0' min
D Rear: common lot line	0' min

## Lot Frontage (see Sec. 38-698.(2)E.)

E Primary Street	80% min
F Secondary Street	70% min

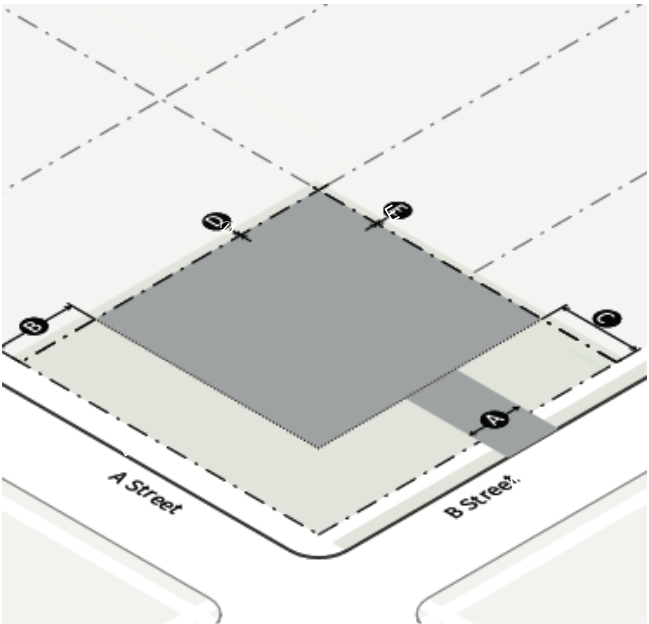

Access

New street curb-cuts allowed per lot      Determined by the Director

**A** Driveway width in setback      20' max

Parking Setbacks \*

**B** A Street      5' min


**C** B Street      5' min

**D** Side: common lot line      5' min

**E** Rear: common lot line      5' min

\*No on-site surface parking is allowed between buildings and the street. No more than 15% of required parking may be surface parking. Structured parking is required for all residential development. Commercial may have surface parking. No on-site surface parking is allowed between buildings and the street and is limited to 15% of required parking. All other parking is required to be structured parking.

(5) HEIGHT AND MASS

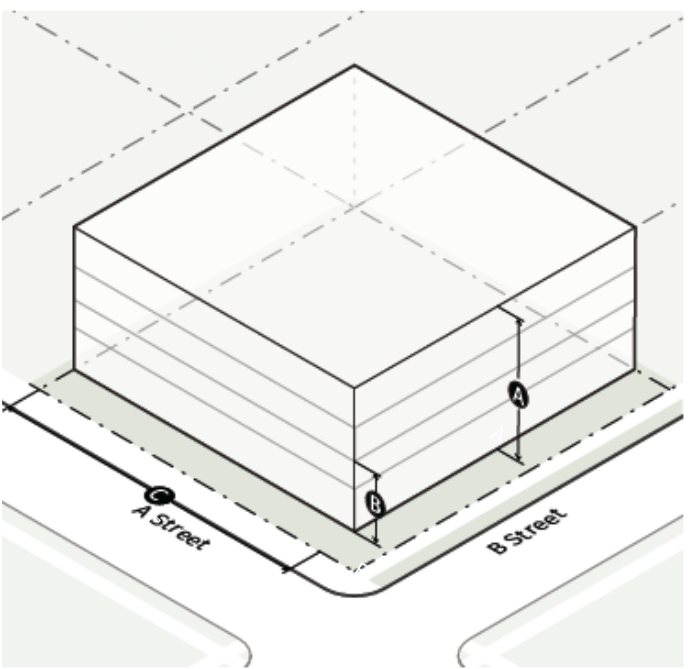

Building Height

<b>A</b> Maximum height	
Transition area	3 stories
Remaining area	4-5 stories(see map)
<b>B</b> Minimum	2 stories min

Building Mass

<b>C</b> Street- facing building length	250' max
---	----------



## (6) PUBLIC REALM



The public realm standards below apply to all streets, unless otherwise noted.

**Transparency**

<b>A</b> Ground story	30% min
<b>B</b> Upper story	25% min
<b>C</b> Blank wall length	30' max
<b>Story Height</b>	
<b>D</b> Residential Ground floor elevation	16" min/ 5' max
<b>D</b> Live/work ground floor elevation	0' min/ 5' max
<b>E</b> Ground story, floor to floor	12' min
<b>F</b> Upper story: floor to floor	9' min
<b>G</b> Entrance facing primary street	Required
<b>H</b> Entrance spacing along primary	75' max
<b>Building Elements Allowed</b>	
Awning/canopy	◆
Balcony	◆
Forecourt	◆
Gallery	◆
Porch	◆
Stoop	◆

**Setbacks**


<b>I</b> Primary/side street	0' min/10' max
Multi-purpose path width	6' min

**Sidewalk\***

<b>J</b> Clear pedestrian zone	6' min
<b>K</b> Street tree/Furniture zone	
Street tree/furniture zone depth**	6' min
<b>Street tree planting</b>	
Tree spacing**	30' avg. on-center

\*\*Where there is insufficient ROW to meet the minimum requirements, the Director may approve modifications.

## (1) SUMMARY

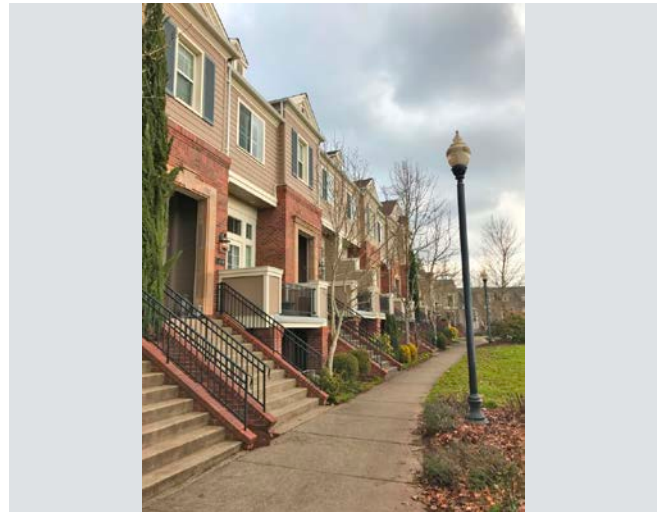

### Intent


The Station District is intended to accommodate a mix of, two-family and lower intensity multi-family housing options in a pedestrian-friendly environment.

### Lot Types


Two-unit

Single-unit attached



Multi-unit (up to 4 units)

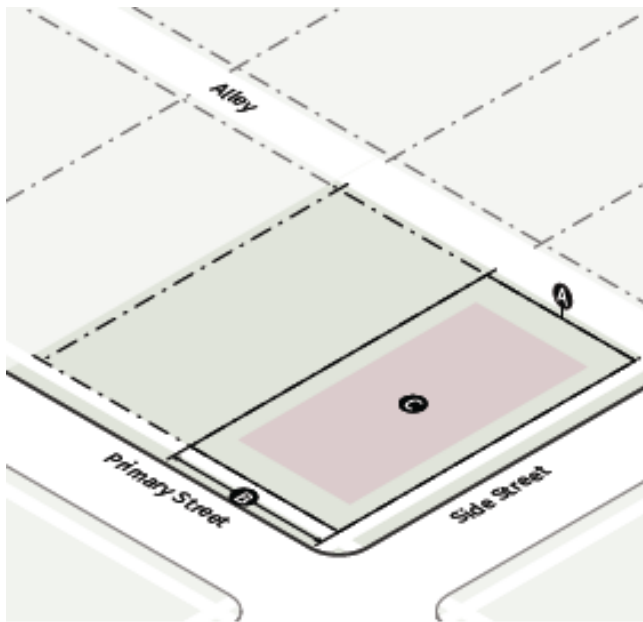

Lot	A Area	B Width
Two-unit	6,000 SF min	50' min
Single-unit attached	1,700 SF min	<del>20'</del> <u>12'</u>
Multi-unit (up to 4 units)	7,500 SF min	50' min
<hr/>		
Building coverage		90% max

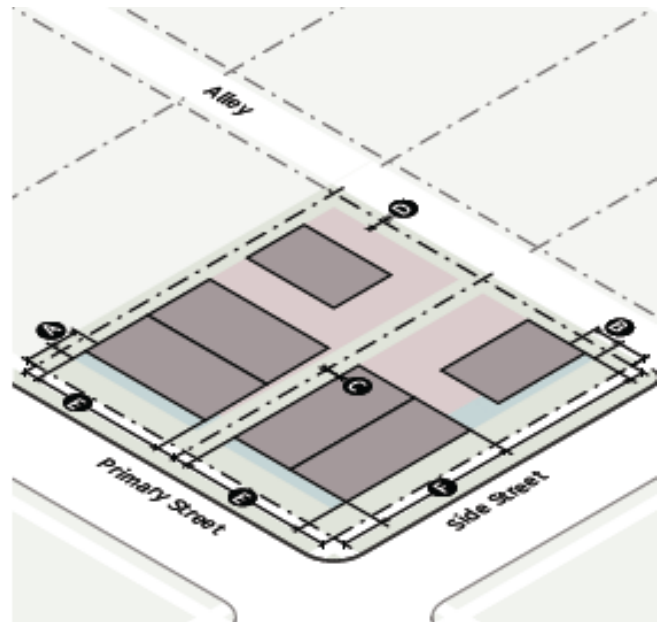

Building Setbacks	
<b>A</b> Primary Street	5' min/10' max
<b>B</b> Side street	10' min/30' max
<b>C</b> Side: common lot line/alley	5' min
<b>C</b> Side: common lot line (one side only)*	0' min
<b>C</b> Side: single-unit attached, between abutting units	0' min
<b>C</b> Side: protected zone	15' min
<b>D</b> Rear: common lot line/alley	5' min
<b>D</b> Rear: protected zone	15' min
Lot Frontage	
<b>E</b> Primary street	60% min
<b>F</b> Side street	30% min

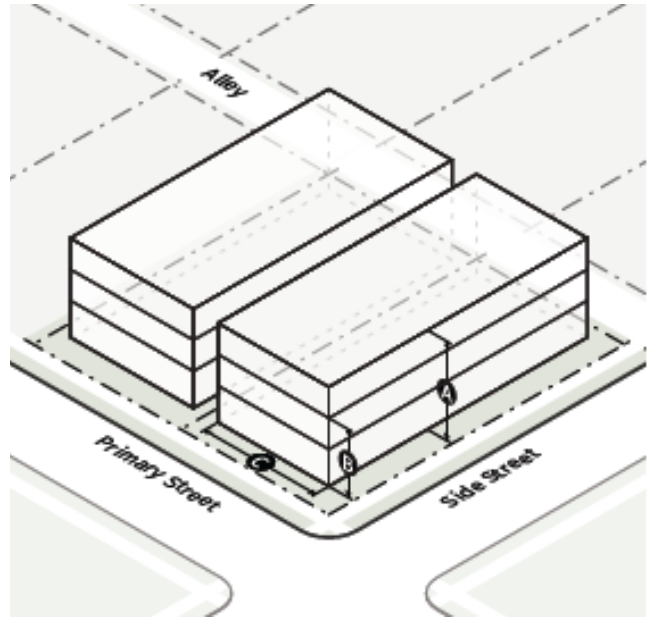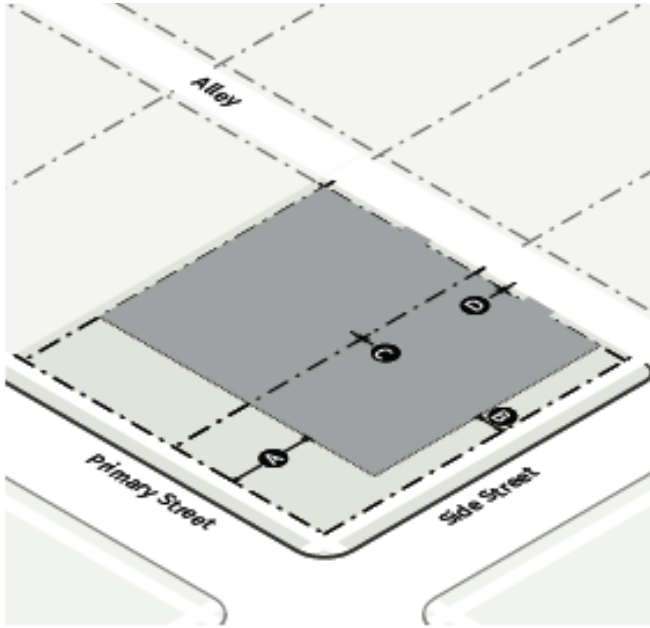

### Access

With alley: new street curb-cuts per lot	None
With no alley: new street curb-cuts per lot	Determined by Director
With no alley: driveway width in setback	15' max

### Parking Setbacks\*

A Primary street	10' min
B Side street	10' min
C Side: common lot line	0' min
D Rear: common lot line/alley	5' min

\*No on-site surface parking is allowed between buildings and the street. No more than 15% of required parking may be surface parking. Structured parking is required for all residential development. Commercial may have surface parking. Parking shall be structured parking.


### Building Height

A Maximum height	
Transition zone (w/in 30' of LDR)	3 stories
All other areas	See Height Map
B Minimum height:	2 stories min

### Building Mass

C Street-facing building length	n/a
---------------------------------	-----

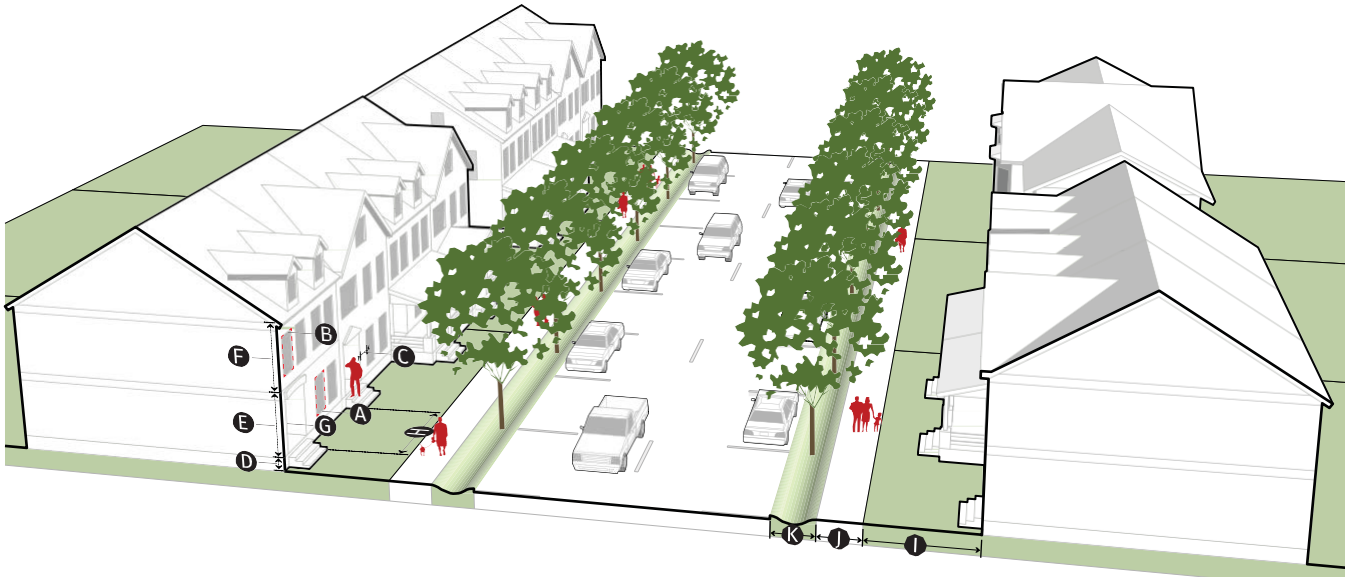

**(6) PUBLIC REALM****Transparency**

<b>A</b> Ground story	n/a
<b>B</b> Upper story	n/a
<b>C</b> Blank wall length	30' max

**Story Height**

<b>D</b> Ground floor elevation	16" min/5'
<b>E</b> Ground story, floor to floor	10'
<b>F</b> Upper story, floor to floor	9'

**Pedestrian Access**

<b>G</b> Entrance facing primary	Require
<b>H</b> Entrance spacing along primary street	50'

**Building Elements Allowed**

Awning/canopy

Balcony



Forecourt



Gallery

Porch



Stoop

**Setback**

<b>I</b> Primary/side street	5' min/10' max
------------------------------	----------------

**Sidewalk\***

<b>J</b> Clear pedestrian zone	6' min
--------------------------------	--------

**Street Tree/Furniture Zone\***

<b>K</b> Street landscaping depth	6' min
-----------------------------------	--------

Treespace	30' avg. on-center
-----------	--------------------

\*Where there is insufficient ROW to meet the minimum requirements, the Director of the Land Development Office may approve modifications.

# CHAPTER 5 RIVERFRONT (RD)

Riverfront District .....	5-2
(1) General Character	5-2
(2) Built Environment	5-2
(3) Streets and Blocks	5-2
(4) Parking and Mobility Options	5-2
 Riverfront District Mixed Use Multi-Unit .....	 5-3
(1) Summary	5-3
(2) Lot Parameters	5-4
(3) Building Placement	5-4
(4) Access/Parking Location	5-5
(5) Height and Mass	5-5
(6) Public Realm	5-6
 Riverfront Residential Attached .....	 5-7
(1) Summary	5-7
(2) Lot Parameters	5-8
(3) Building Placement	5-8
(4) Access/Parking Location	5-9
(5) Height and Mass	5-9
(6) Public Realm	5-10

# Riverfront District



## (1) General Character

The Riverfront District consists of medium- to high-intensity residential and tourist areas. Multi-family housing is predominant. Commercial activity is ~~limited~~ recommended to be mixed use in multi-family residential buildings and hotels. Priority is given to pedestrians and bicyclists on West Main Street.

## (2) Built Environment

The Riverfront District can be up to 4-6 stories in height and typically have setbacks along the riverside of the buildings, when over 3-stories. Those developments along West Main may develop up to 4 stories, and along Fryar Avenue buildings may be erected up to 6-stories. Riverfront sites have shoreline setbacks, and entrances should be limited off the streets, shared access is preferred. Limited mixed use in buildings is allowed to service the tourist and residential community and hotels are allowed. Parking is located to the rear of buildings, when feasible and must be structured parking. Building coverage is moderate to allow for open spaces, public access, and views to the river.

## (3) Streets and Blocks

Streets and rights-of-way are narrower in width on West Main Street, and Fryar is a wide thoroughfare. Streets that parallel the river frame development sites. Block shapes and sizes are often irregular due to the topography of many sites. The typical block pattern includes detached sidewalks, street trees, on-street parking and landscaping. Access is typically via a shared service drive to a surface parking lot or structured parking.

## (4) Parking and Mobility Options

Parking is primarily provided on-street and in structured facilities. Parking is located to the rear of buildings, when feasible. In street design, priority is given to pedestrians and bicyclists. There is access to multiple modes of transportation and frequent pedestrian activity.



## (1) SUMMARY



---

### Intent

The Riverfront District is intended to accommodate a mix of multi-family and commercial activity in a manner that addresses and maintain views to the river.

---


---

### Lot Types

Multi-unit, Mixed Use, Commercial


---

**(2) LOT PARAMETERS**

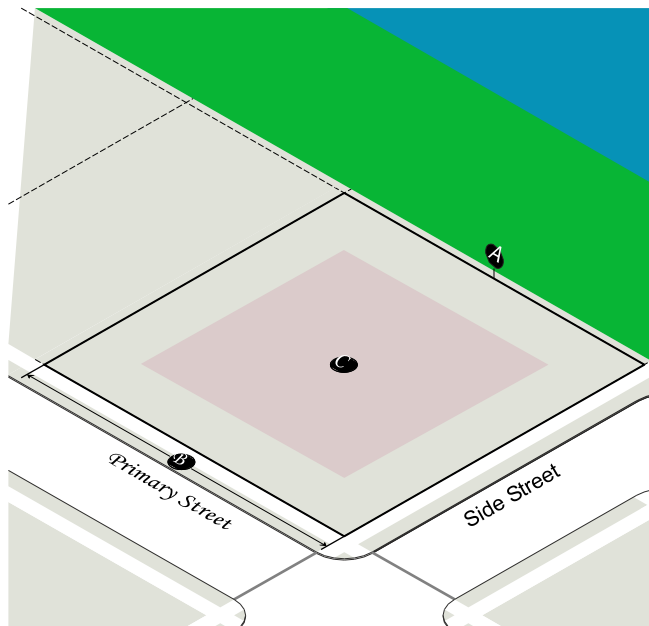

Lot	A Area	B
All types	6,000 SF min	50'
Specifications		
Building coverage	70% max	

**(3) BUILDING PLACEMENT**

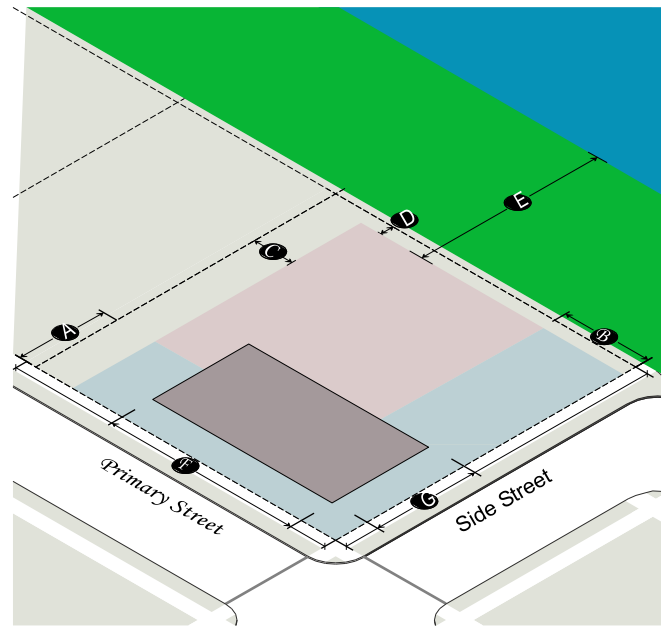

**Building Setbacks**


A Primary street	0' min/20' max
B Side street	0' min/20' max
C Side: common lot line	0' min
E River*	See SMP

**Lot Frontage**

F Primary street	60% min
G Side street	30% min

\*Development within 200 feet of the river is subject to additional requirements and restrictions in the Sumner Shoreline Master Program.

## (5) HEIGHT AND MASS

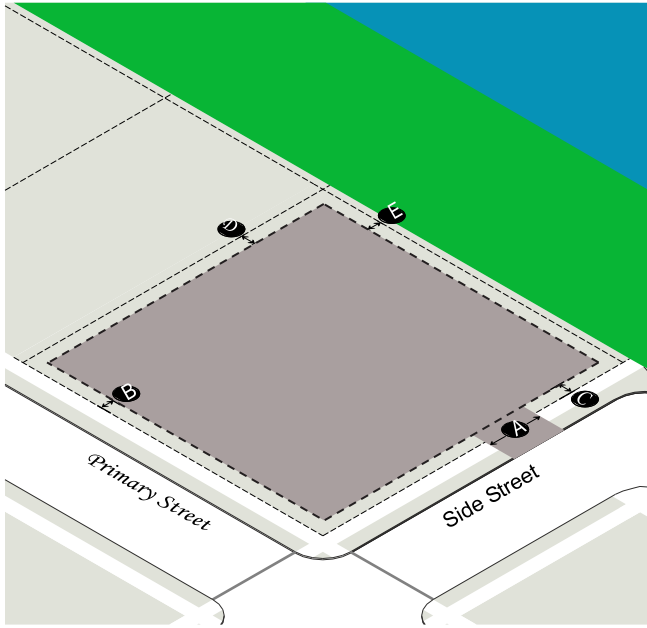

### Access

New street curb-cuts  
allowed per lot

Determined by  
the Director


<b>A</b> Driveway width in setback	20' max
------------------------------------	---------

### Parking Setbacks

<b>B</b> Primary street	5'
<b>C</b> Side street	5'
<b>D</b> Side: common lot line	5' min
<b>E</b> Rear: common lot line	5' min

No on-site surface parking is allowed between  
buildings and the street.

No more than 15% of required parking may be  
surface parking. Structured parking is required  
for all residential development. Commercial  
may have surface parking.

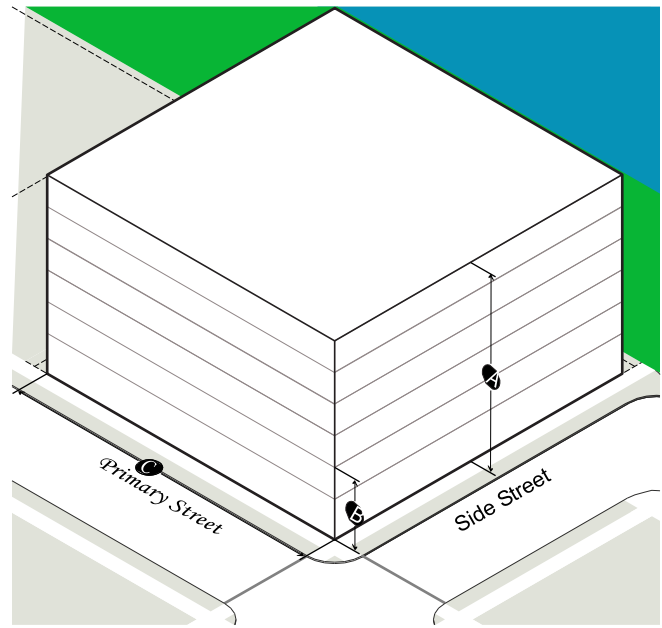


### Building Height

Maximum height

<b>A</b> West Main Street	4 stories
<b>B</b> All other areas	6 stories
Minimum height	2 stories

### Building Mass

<b>C</b> Street- or river facing building length	50' max - West Main 250' max
---	---------------------------------

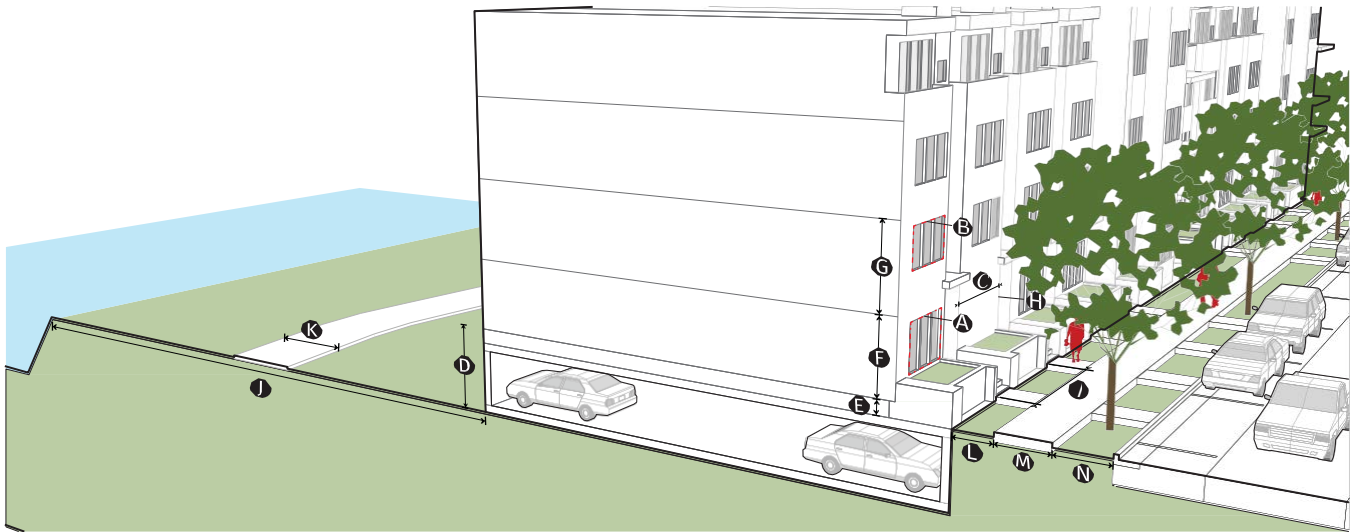**(6) PUBLIC REALM**

The public realm standards below apply to all streets, unless noted otherwise.

	RIVERSIDE	STREETSIDE
<b>Transparency</b>		
<b>A</b> Ground story	30% min	30% min
<b>B</b> Upper story	25% min	25% min
<b>C</b> Blank wall length	30' max	30' max
<b>Story Height</b>		
<b>D</b> First habitable story	BFE+2'	BFE+2'
<b>E</b> Ground floor elevation		
Residential	n/a	16" min/ 5' max
Nonresidential	n/a	0' min/ 2' max
<b>F</b> Ground story: floor to	n/a	12' min
<b>G</b> Upper story: floor to	9' min	9' min
<b>Pedestrian Access</b>		
<b>H</b> Entrance facing	Required	Required
<b>I</b> Entrance spacing along	n/a	50' max
<b>Building Elements Allowed</b>		
Awning/canopy	◆	◆
Balcony	◆	◆
Forecourt	n/a	◆
Gallery	◆	◆
Porch	◆	◆
Stoop		

**Riverside**

<b>J</b> River setback*	See SMP
<b>K</b> Multi-purpose path width	12' min

**Streetside**


<b>L</b> Primary/side street	0' min/15' max
<b>M</b> Clear pedestrian zone**	6' min
<b>N</b> Street tree/furniture zone depth**	6' min
Street tree planting type	Tree pit/verge
Tree spacing**	30' avg. on-center

\*Development within 200 feet of the river is subject to additional requirements and restrictions in the Summer Shoreline Master Program.

\*\*Where there is insufficient ROW to meet the minimum requirements, the Director may approve modifications.



## (1) SUMMARY

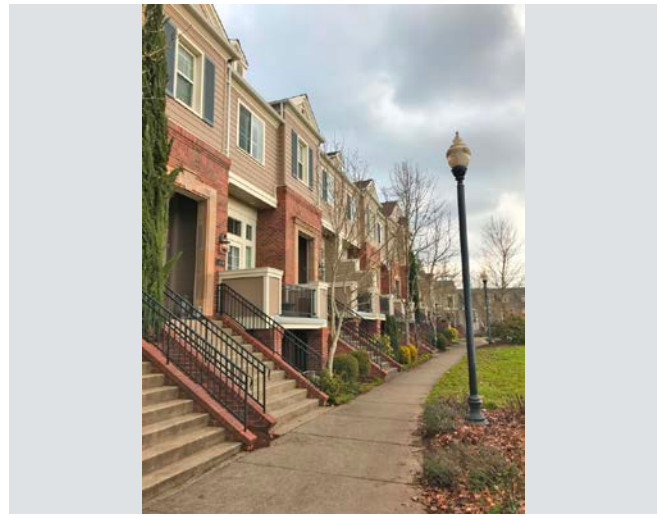

### Intent


The Riverfront District is intended to accommodate a mix of, two-family and lower intensity multi-family housing options in a pedestrian-friendly environment.

### Lot Types

Two-unit

Single-unit attached


Multi-unit (up to 4 units)

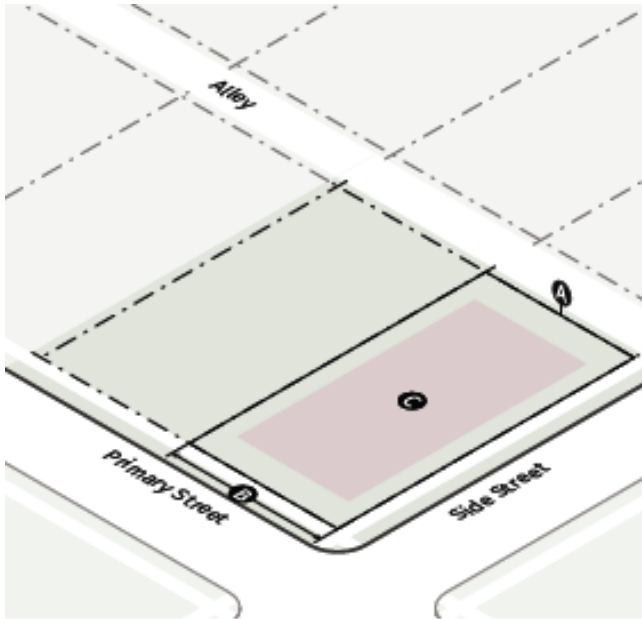**(2) LOT PARAMETERS**

Lot	A Area	B Width
Two-unit	6,000 SF min	50' min
Single-unit attached	1,700 SF min	<del>20</del> 12' min
Multi-unit (up to 4 units)	7,500 SF min	50' min


Building coverage	90% max
-------------------	---------

**(3) BUILDING PLACEMENT****Building Setbacks**

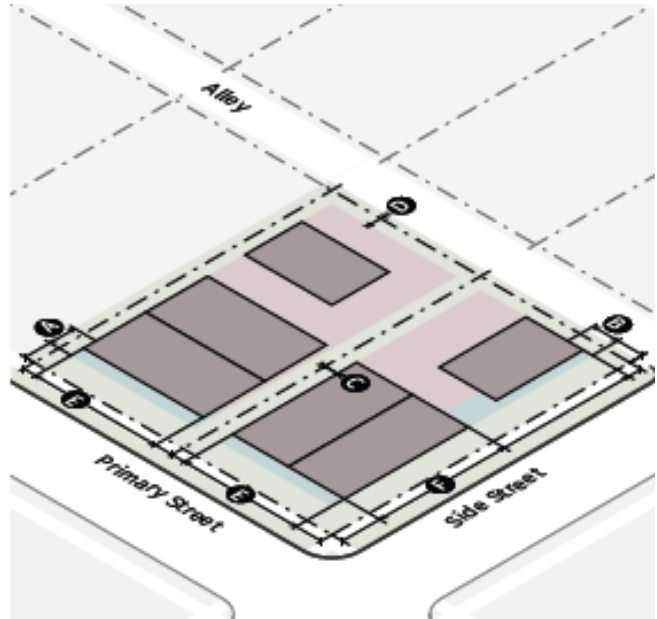Side street	10' min/30' max
Side: common lot line/alley	5' min
Side: common lot line (one side only)*	0' min
Side: single-unit attached, between abutting units	0' min
Side: protected zone	15' min
Rear: common lot line/alley	5' min
Rear: protected zone	15' min

**Lot Frontage**

Primary street	60% min
Side street	30% min

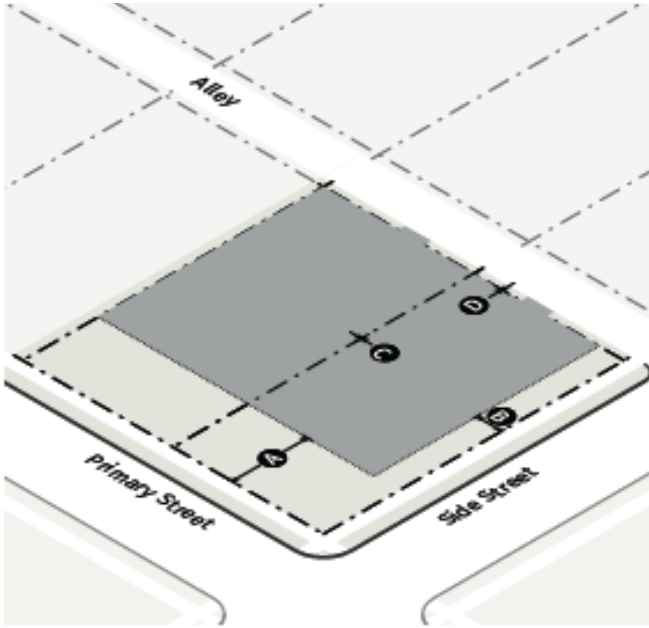**(4) ACCESS/PARKING LOCATION****Access**

With alley: new street curb-cuts per lot

None

With no alley: new street curb-cuts per lot

Determined by Director

With no alley: driveway width in setback

15' max

**Parking Setbacks\***

**A** Primary street

15' min

**B** Side street

10' min


**C** Side: common lot line

0' min

**D** Rear: common lot line/alley

5' min

\*No on-site surface parking is allowed between buildings and the street. No more than 15% of required parking may be surface parking. Structured parking is required for all residential development. Commercial may have surface parking. ~~Parking shall be structured parking.~~

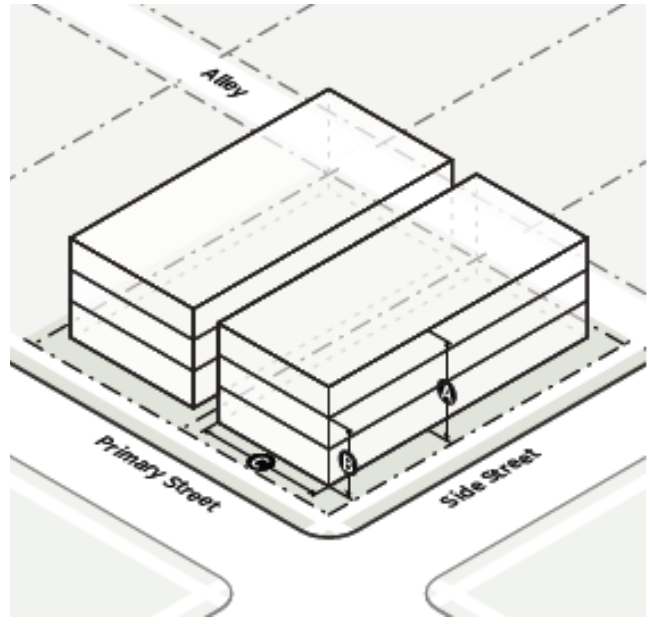**(5) HEIGHT AND MASS****Building Height**

**A** Maximum height

Transition zone (w/in 30' of LDR) 3 stories


All other areas See Height Map

**B** Minimum height: 2 stories min

**Building Mass**

**C** Street-facing building length n/a

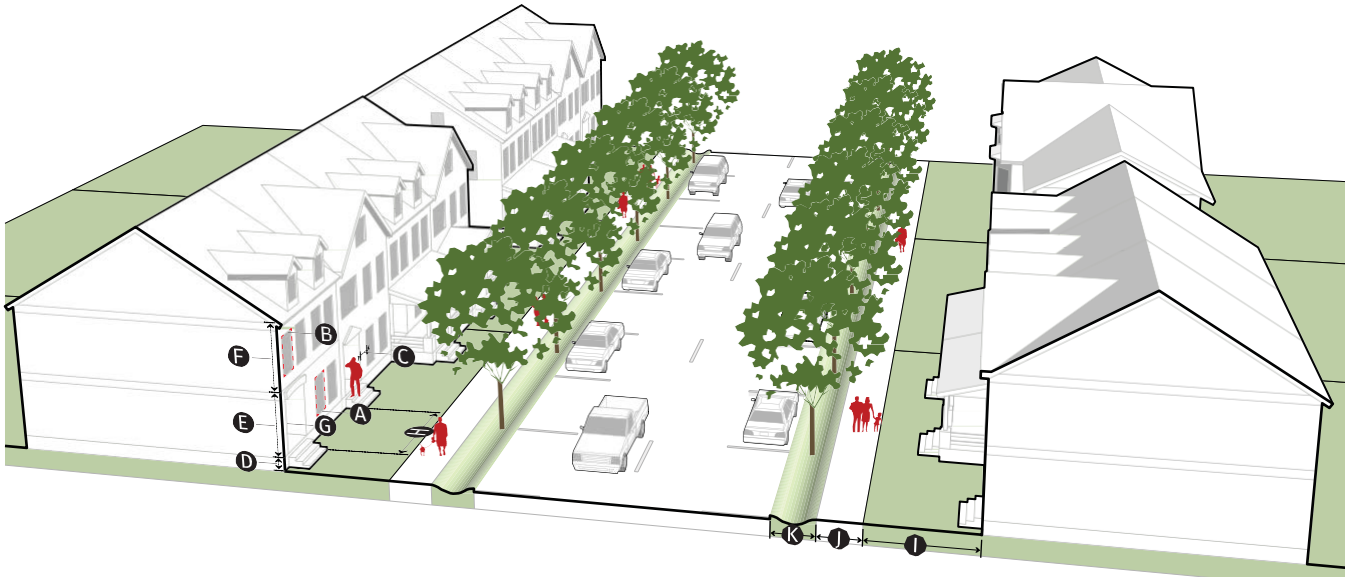

**(6) PUBLIC REALM****Transparency**

<b>A</b> Ground story	n/a
<b>B</b> Upper story	n/a
<b>C</b> Blank wall length	30' max

**Story Height**

<b>D</b> Ground floor elevation	16" min/5'
<b>E</b> Ground story, floor to floor	10'
<b>F</b> Upper story, floor to floor	9'

**Pedestrian Access**

<b>G</b> Entrance facing primary	Require
<b>H</b> Entrance spacing along primary street	50'

**Building Elements Allowed**

Awning/canopy

Balcony



Forecourt



Gallery

Porch



Stoop

**Setback**

<b>I</b> Primary/side street	5' min/10' max
------------------------------	----------------

**Sidewalk\***

<b>J</b> Clear pedestrian zone	6' min
--------------------------------	--------

**Street Tree/Furniture Zone\***

<b>K</b> Street landscaping depth	6' min
-----------------------------------	--------

Treespace	30' avg. on-center
-----------	--------------------

\*Where there is insufficient ROW to meet the minimum requirements, the Director of the Land Development Office may approve modifications.



# Chapter 6. West Sumner District (WSD)

Urban Context .....	6-2
(1) General Character	6-2
(2) Built Environment	6-2
(3) Streets and Blocks	6-2
(4) Parking and Mobility	6-2
Residential Attached Zone.....	6-7
(1) Summary	6-7
(2) Lot Parameters	6-8
(3) Building Placement	6-8
(4) Access/Parking Location	6-9
(5) Height and Mass	6-9
(6) Public Realm	6-10
Residential Multi-Unit and Mixed Use.	6-11
(1) Summary	6-11
(2) Lot Parameters	6-12
(3) Building Placement	6-12
(4) Access/Parking Location	6-13
(5) Height and Mass	6-13
(6) Public Realm	6-14
Commercial.	6-15
(1) Summary	6-15
(2) Lot Parameters	6-16
(3) Building Placement	6-16
(4) Access/Parking Location	6-17
(5) Height and Mass	6-17
(6) Public Realm	6-18

# West Sumner District



## (1) General Character

The West Sumner District consists of medium-high intensity residential and commercial areas. Multi-family housing is predominant with opportunities for small commercial, retail, and restaurants. Commercial activity is concentrated along major roadways and at activity nodes and is encouraged to be vertical mixed use. Equal emphasis is given to pedestrians, bicyclists and automobiles.

## (2) Built Environment

Residential zones can be up to 6 stories in height and typically have smaller front setbacks than other Districts. Parking is required to be provided to the rear and side of buildings and within a structure. Building coverage is relatively high.


## (3) Streets and Blocks

A rectilinear grid of streets frames a regular pattern of mid-sized, walkable blocks. Alleys are often present. Block shapes and sizes are relatively consistent. The typical block pattern includes detached and attached sidewalks, street trees, street and surface parking, and open space and landscaping. Residential and commercial access is typically via an alley or shared service drive to a surface parking lot.

## (4) Parking and Mobility

Parking is primarily provided on-street, in structures in more intense mixed use zones. Surface parking is extremely limited and located to the rear and side of buildings. In street design, equal emphasis is given to pedestrians, bicyclists and automobiles. There is access to multiple modes of transportation and frequent pedestrian activity.

## (1) SUMMARY

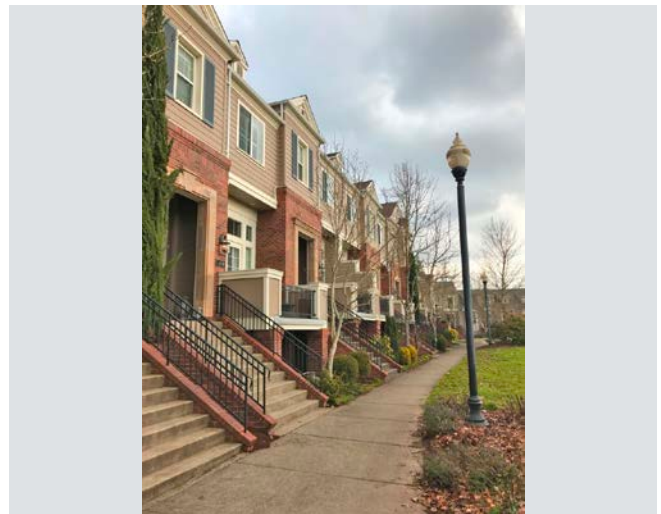

### Intent

The West Sumner District is intended to accommodate a mix of two-family and lower intensity multi-family housing options in a pedestrian-friendly environment.


### Lot Types

Two-unit



Single-attached

Multi-unit (up to 4 units)



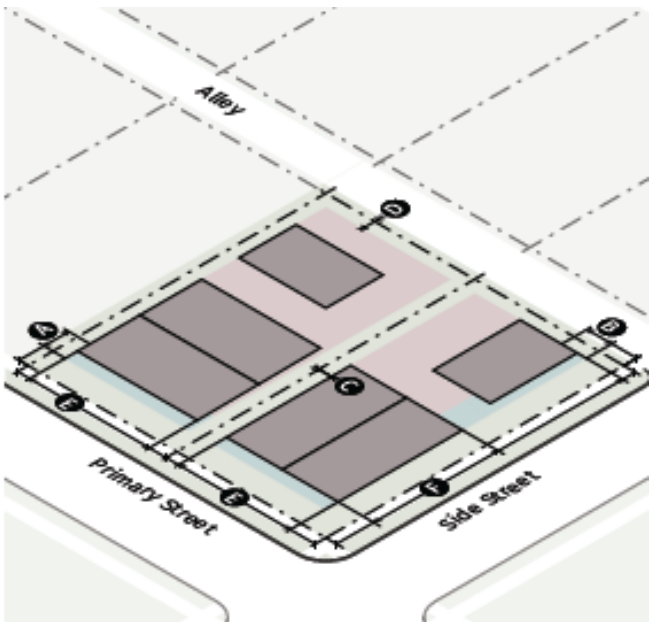

Building Setbacks		
<b>A</b>	Primary Street	0' min/10' max
<b>B</b>	Side street	10' min/30' max
<b>C</b>	Side: common lot line/alley	5' min
<b>C</b>	Side: common lot line (one side only)*	0' min
<b>C</b>	Side: single-unit attached, between abutting units	0' min
<b>C</b>	Side: protected zone	15' min
<b>D</b>	Rear: common lot line/alley	5' min
<b>D</b>	Rear: protected zone	15' min
Lot Frontage		
<b>E</b>	Primary street	60% min
<b>F</b>	Side street	30% min

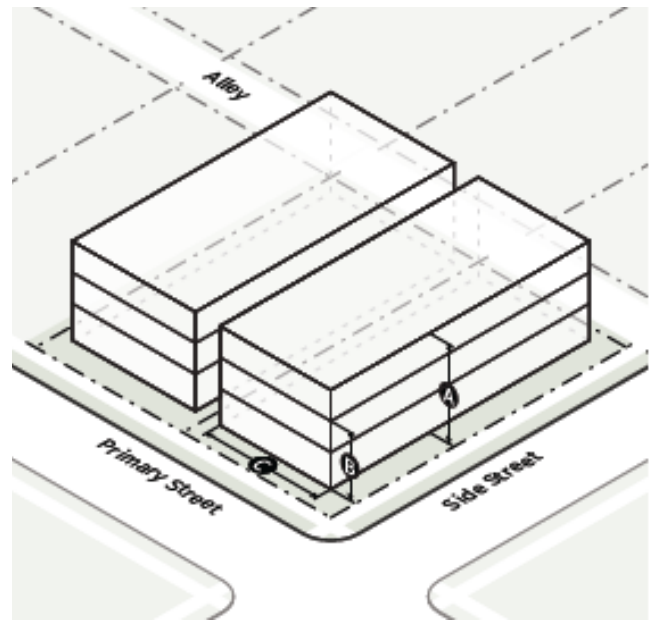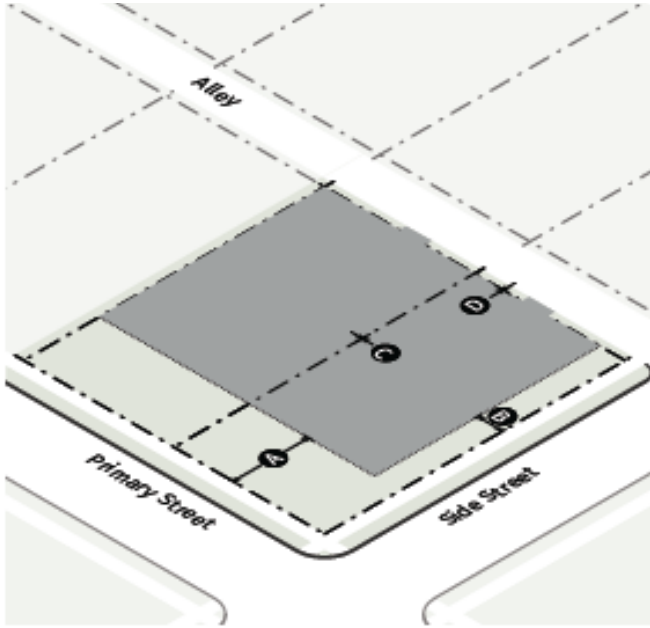

### Access

With alley: new street curb-cuts per lot	None
With no alley: new street curb-cuts per lot	Determined by Director
With no alley: driveway width in setback	10' max

### Parking Setbacks\*

<b>A</b> Primary street	10' min
<b>B</b> Side street	10' min
<b>C</b> Side: common lot line	0' min
<b>D</b> Rear: common lot line/alley	5' min

\*No on-site surface parking is allowed between buildings and the street. No more than 15% of required parking may be surface parking. Structured parking is required for all residential development. Commercial may have surface parking.

~~Residential parking shall be structured parking. Surface parking may be allowed for restaurant and commercial uses.~~

### Building Height


<b>A</b> Maximum height	
Transition zone (w/in 30' of LDR)	3 stories
All other areas	See Height Map

<b>B</b> Minimum height:	2 stories min
--------------------------	---------------

### Building Mass

<b>C</b> Street-facing building length	n/a
--	-----

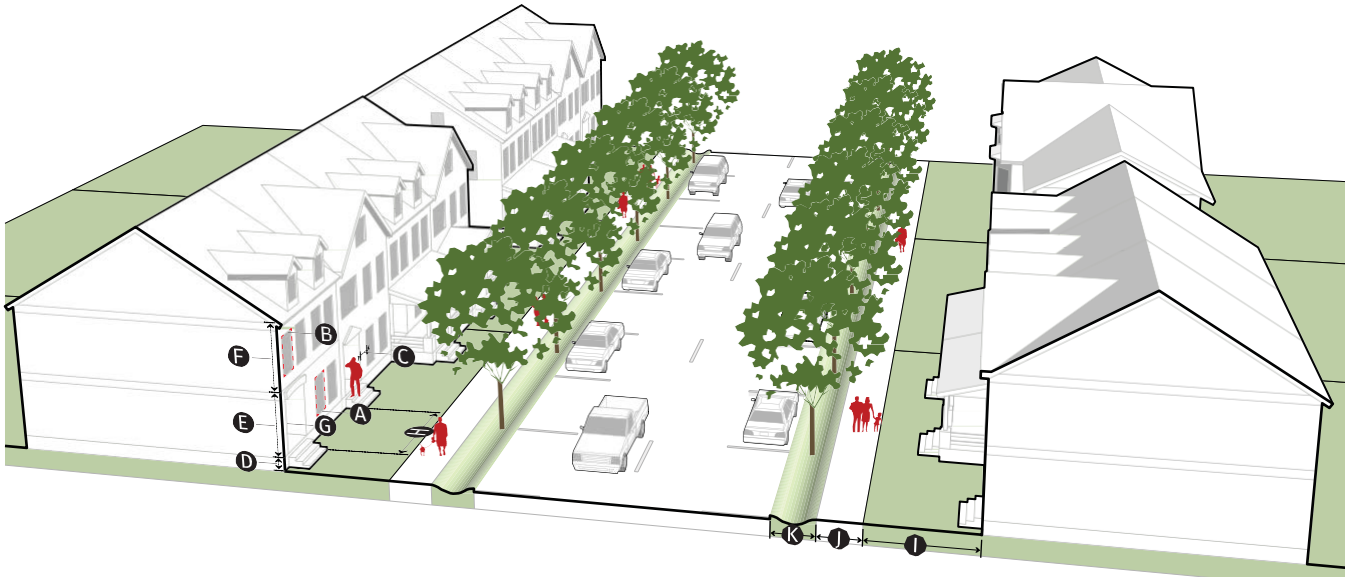

**(6) PUBLIC REALM****Transparency**

<b>A</b> Ground story	n/a
<b>B</b> Upper story	n/a
<b>C</b> Blank wall length	30' max

**Story Height**

<b>D</b> Ground floor elevation	16" min/5'
<b>E</b> Ground story, floor to floor	10'
<b>F</b> Upper story, floor to floor	9'

**Pedestrian Access**

<b>G</b> Entrance facing primary	Require
<b>H</b> Entrance spacing along primary street	50'

**Building Elements Allowed**

Awning/canopy

Balcony



Forecourt



Gallery

Porch



Stoop

**Setback**

<b>I</b> Primary/side street	5' min/10' max
------------------------------	----------------

**Sidewalk\***

<b>J</b> Clear pedestrian zone	6' min
--------------------------------	--------



**Street Tree/Furniture Zone\***

<b>K</b> Street landscaping depth	6' min
-----------------------------------	--------

Treespacing	30' avg. on-center
-------------	--------------------

\*Where there is insufficient ROW to meet the minimum requirements, the Director of the Land Development Office may approve modifications.

# Residential Multi-Unit



## Intent


The West Sumner District is intended to accommodate a mix of higher intensity multi-family housing options in a pedestrian-friendly environment. Live/work is allowed subject to standards that limit the extent of the use.

## Lot Types

Multi-unit


Mixed Use (Com/Res)

(2) LOT PARAMETERS

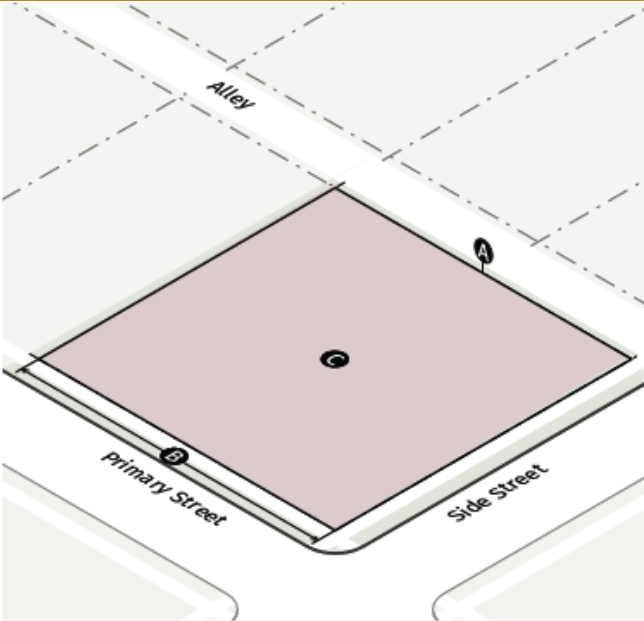


Lot	A Area	B Width
All lot types	7,500 SF min	75' min
Specifications		
Building coverage	100% max	

(3) BUILDING PLACEMENT

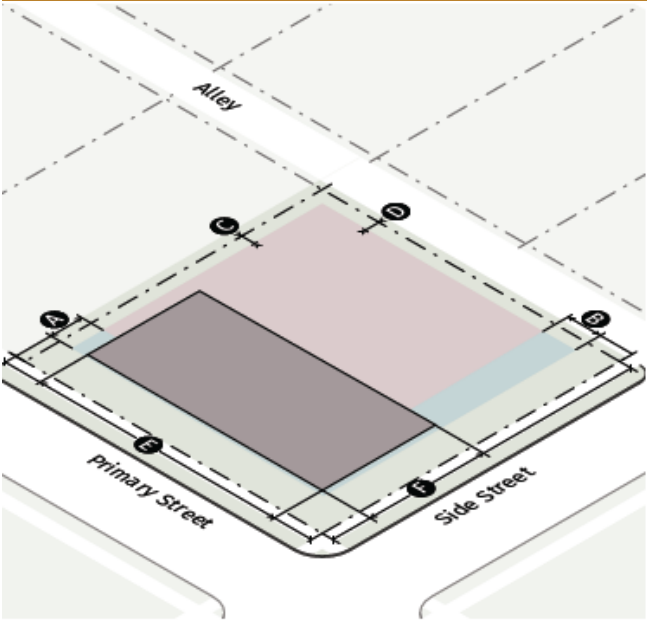

Building Setbacks		
A	Primary Street	0' min, 10' max
B	Side Street:	0' min
C	Side, Common lot line/alley	0' min
D	Rear: common lot line/alley	5' min
Lot Frontage		
E	Primary street	80% min
F	Side street	40% min

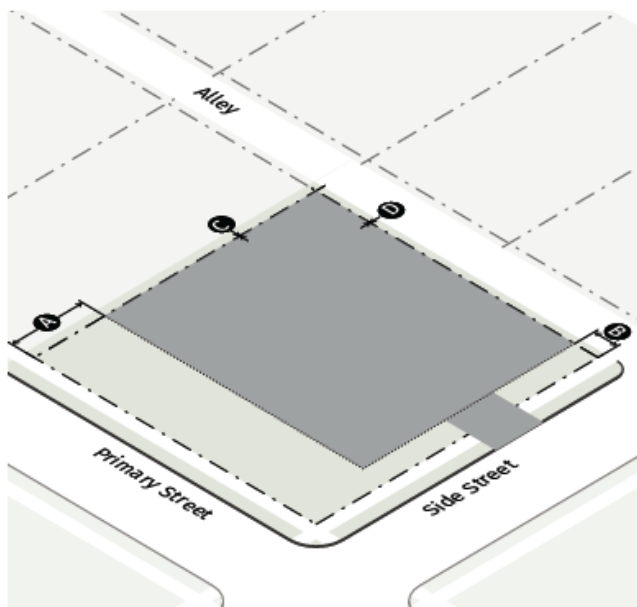**(4) ACCESS/PARKING LOCATION****Access**

With alley: new street  
curb-cuts per lot

None

With no alley: new street  
curb-cuts per lot

Determined by  
Director


With no alley: driveway  
width in setback

20' max

**Parking Setbacks\***

<b>A</b> Primary street	10' min
<b>B</b> Side street	10' min
<b>C</b> Side: common lot line/ alley	0' min
<b>D</b> Rear: common lot line/ alley	0' min

\* No on-site surface parking is allowed between buildings and the street. No more than 15% of required parking may be surface parking. Structured parking is required for all residential development. Commercial may have surface parking.

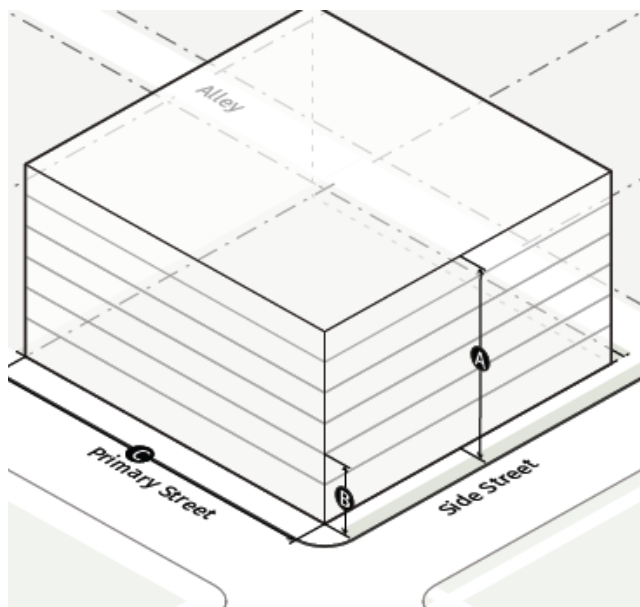**(5) HEIGHT AND MASS****Building Height**

<b>A</b> Maximum height	6 stories
<b>B</b> Minimum height	3 stories
<b>C</b> Minimum height: Primary Street	4 stories min

**Building Mass**

Street-facing building length	300' max
-------------------------------	----------

**(6) PUBLIC REALM**

The public realm standards below apply to all streets, unless noted otherwise.

	Residential Ground Floor	Nonresidential Ground Floor
<b>Transparency</b>		
<b>A</b> Ground story	30% min	50% min
<b>B</b> Upper story	25% min	25% min
<b>C</b> Blank wall length	30' max	30' max
<b>Story Height</b>		
<b>D</b> Ground floor elevation	16" min/ 5' max	0' min/ 2' max
<b>E</b> Ground story: floor to floor	12' 2in	14' min
<b>F</b> Upper story: floor to floor	9' min	9' min
<b>Pedestrian Access</b>		
<b>G</b> Entrance facing primary street	Required	Required
<b>H</b> Entrance spacing along primary street	75' max	100' max
<b>Building Elements Allowed</b>		
Awning/canopy	◆	◆
Balcony	◆	◆
Forecourt	◆	◆
Gallery		◆
Porch	◆	◆
Stoop	◆	◆

**Setbacks**

<b>I</b> Primary/side street	0' min/15' max
------------------------------	----------------

**Sidewalk\***

<b>J</b> Clear pedestrian zone	6' min
--------------------------------	--------

**Street Tree/Furniture Zone\***

<b>K</b> Street tree/furniture zone depth	6' min
---	--------

Street tree planting type	Tree pit/verge
---------------------------	----------------

Tree spacing	30' avg. on-center
--------------	--------------------

\*Where there is insufficient ROW to meet the minimum requirements, the Director of the Land Development Office may approve modifications (see Sec. 38-696.(4)).



## (1) SUMMARY



---

### Intent

The West Sumner District is intended to accommodate a variety of residential, retail, service and commercial building forms and uses in a pedestrian-friendly environment. Although buildings are allowed to be exclusively residential or nonresidential in use, the vertical mixing of uses is strongly encouraged, especially in Activity Nodes, where the market shows demand.

---

---

### Lot Types

Mixed Use

---



The diagram shows a diamond-shaped lot, which is a rhombus, shaded in light purple. A central point is labeled 'G'. Point 'A' is located on the right boundary of the lot, and point 'B' is located on the bottom boundary. The lot is situated at the corner of two streets: 'A Street' runs along the bottom-left side, and 'B Street' runs along the bottom-right side. Dashed lines extend from the corners of the lot, suggesting the continuation of the lot's boundaries or the street grid.

Lot	<b>A</b> Area	<b>B</b> Width
Mixed Use	2,500 SF min	25' min
Public	2,500 SF min	25' min
Specifications		
<b>C</b> Building coverage		80% max

The diagram illustrates a diamond interchange at the intersection of a mainline road and two cross streets, A Street and B Street. The mainline road is shown as a dark grey rectangle. The on-ramp for A Street is a light blue trapezoidal area, and the off-ramp for A Street is a light pink trapezoidal area. The on-ramp for B Street is a light blue trapezoidal area, and the off-ramp for B Street is a light pink trapezoidal area. The diagram is labeled with 'A Street' and 'B Street' and includes various dimension lines and markers (a, b, c, d, e, f, g, h, i, j, k, l, m, n, o, p, q, r, s, t, u, v, w, x, y, z) indicating the geometry and dimensions of the interchange.


## Building Setbacks

<b>A</b>	Primary street	0' min/15' max
<b>B</b>	Side street	0' min/15' max
<b>C</b>	Side: common lot line	0' min
<b>B</b>	Side: alley	5' min
<b>C</b>	Rear: common lot line	0' min
<b>D</b>	Rear: alley	5' min


Lot Frontage

D	Primary street	80% min
E	Side street	40% min

#### (4) ACCESS/PARKING LOCATION

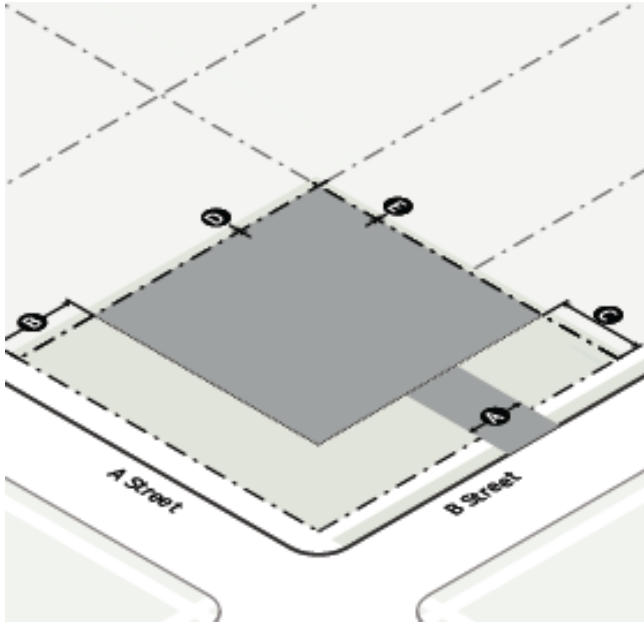

#### (5) HEIGHT AND MASS

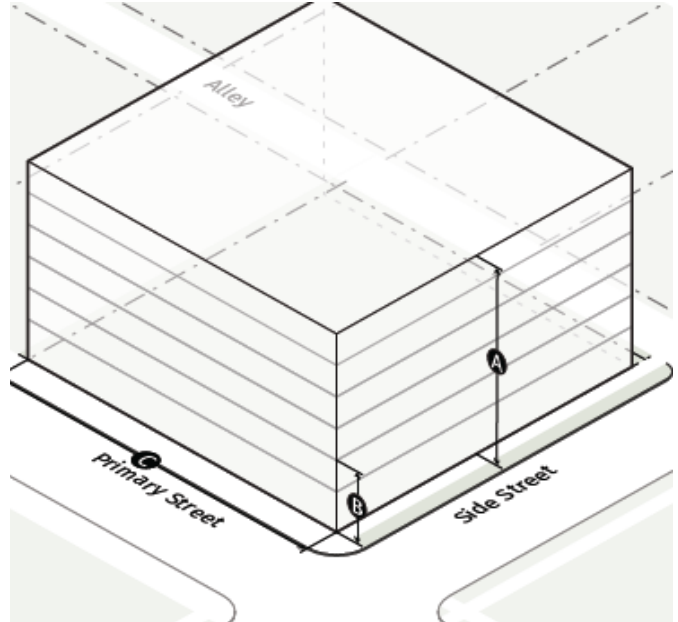

##### Access

	A Street: new curb-cuts allowed per lot	None
	B Street: distance between curb-cuts on same lot	100'
A	Driveway width in setback	20'
	Driveway width in setback	max

##### Parking Setbacks\*

B	Primary Street	5' min
C	Secondary Street	5' min
D	Side: common line	0' min
E	Rear: common line	0' min

##### Building Height

A	Maximum height	6 stories
B	Minimum height	2 stories


##### Building Massing

C	Street-facing building length	300'
---	-------------------------------	------

\*No on-site surface parking is allowed between buildings and the street.

A- No more than 15% of required parking may be surface parking. Structured parking is required for all residential development. Commercial may have surface parking. Residential parking shall be structured parking. Commercial may be surface parking and shall be screened from the right of way, public open space, and trails.

## (6) PUBLIC REALM

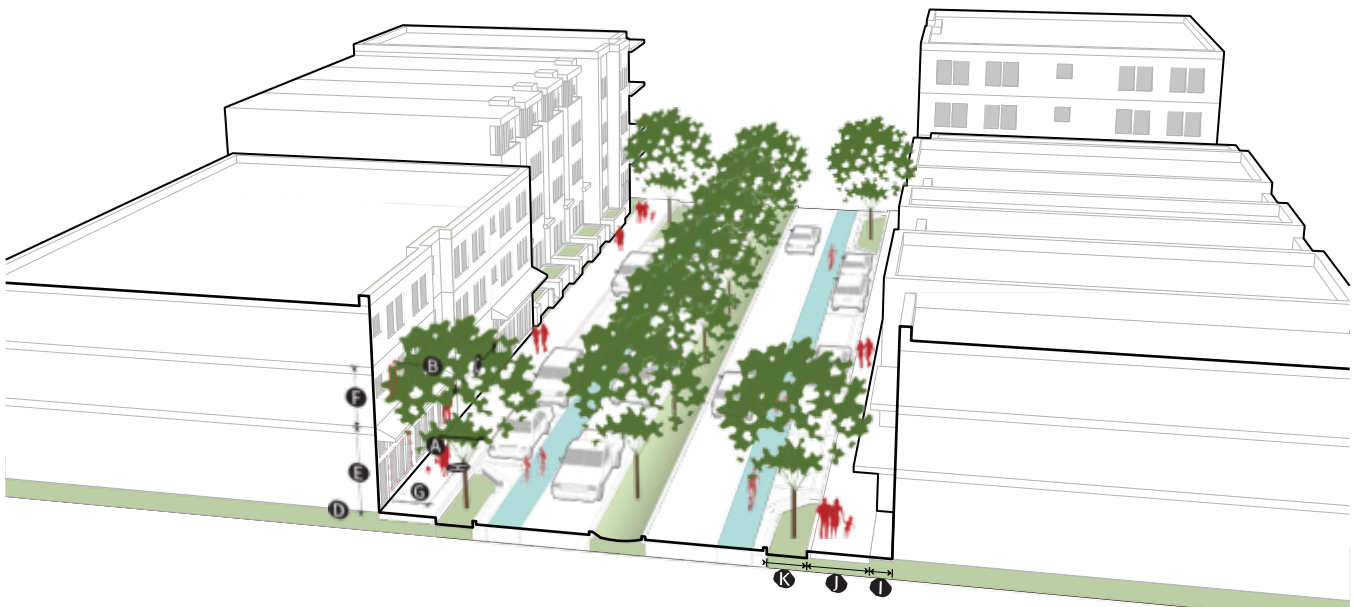

The public realm standards below apply to all streets, unless noted otherwise.

Residential  
Ground Floor

Nonresidential  
Ground Floor

### Transparency

<b>A</b>	Ground story	30% min	50% min
<b>B</b>	Upper story	25% min	25% min
<b>C</b>	Blank wall length	30' max	30' max

### Story Height

<b>D</b>	Ground floor elevation	16" min/ 5' max	0' min/ 2' max
<b>E</b>	Ground story: floor to floor	12' min	14' min
<b>F</b>	Upper story: floor to floor	9' min	9' min

### Pedestrian Access

<b>G</b>	Entrance facing primary street	Required	Required
<b>H</b>	Entrance spacing along primary street	75' max	100' max

### Building Elements Allowed

Awning/canopy	◆	◆
Balcony	◆	◆
Forecourt	◆	◆
Gallery		◆
Porch	◆	◆
Stoop	◆	◆

### Setbacks

<b>I</b>	Primary/side street	0' min/15' max
----------	---------------------	----------------

### Sidewalk\*

<b>J</b>	Clear pedestrian zone	6' min
----------	-----------------------	--------

### Street Tree/Furniture Zone\*

<b>K</b>	Street tree/furniture zone depth	6' min
	Treespacing	30' avg. on-
	Treespacing	30' avg. on-center



# CHAPTER 7 HISTORIC DISTRICT CBD (HD)

Historic District CBD Context .....	7-2
(1) General Character	7-2
(2) Built Environment	7-2
(3) Streets and Blocks	7-2
(4) Parking and Mobility Options	7-2
Historic District .....	7-3
(1) Summary	7-3
(2) Lot Parameters	7-4
(3) Building Placement	7-4
(4) Access/Parking Location	7-5
(5) Height and Mass	7-5
(6) Public Realm	7-6

# Historic CBD



## (1) General Character

The Historic Central Business District (CBD) consists of medium- intensity residential, retail, commercial, and restaurants. Retail shops and restaurants are predominant. Commercial activity is ~~limited-typically to~~ mixed use in multi-family residential over retail/restaurants or commercial. Focus is given to historic character of the Main Street design and form. Priority is given to pedestrians and bicyclists.

## (2) Built Environment

Buildings can be up to 4 stories in height and are typically built to the edge of the sidewalk (see height map). Parking must be to the rear of the building(s) or screened from primary streets. Building coverage is high.

## (3) Streets and Blocks

Streets and rights-of-way are typically narrower in width. A rectilinear grid of streets frames a regular pattern of mid-sized, walkable blocks. Alleys are often present. Block shapes and sizes are relatively consistent. The typical block pattern includes detached and attached sidewalks, street trees, on- street and surface parking, and open space and landscaping. Residential and commercial access is typically via secondary streets and shared service drives to structured parking. Surface parking is severely limited.

## (4) Parking and Mobility Options

Parking is primarily provided on-street and in structured or public surface facilities. Parking is located to the rear of buildings. In street design, priority is given to pedestrians and bicyclists. There is access to multiple modes of transportation and frequent pedestrian activity.



## (1) SUMMARY



### Intent


The Historic CBD is intended to accommodate a variety of residential, retail, service and commercial building uses in a storefront environment. Uses are flexible but tall ground floors with large areas of transparent glazing are required to accommodate retail and restaurant uses. Focus is given to historic character of the Main Street and design and form in the district follow these queues.

### Lot Types

Commercial/Mixed-Use




## (2) LOT PARAMETERS

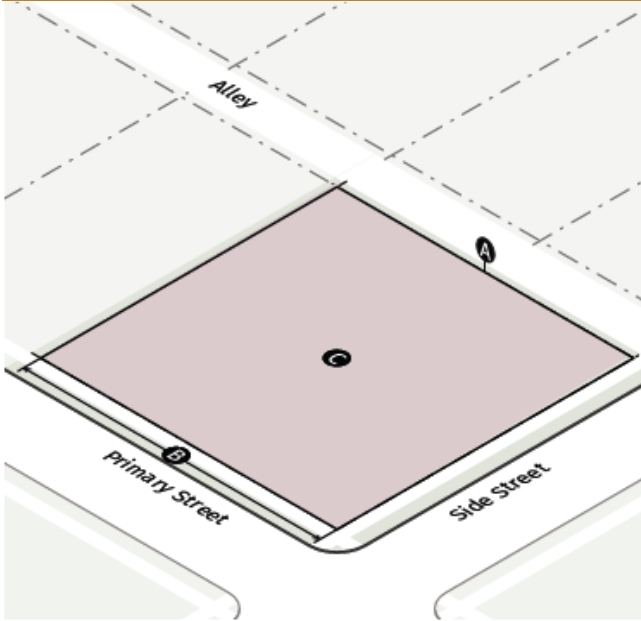



Lot	A Area	B Width
All lot types	5,000 SF min	50' min
<b>Specification</b>		
C Building coverage		100% max

## (3) BUILDING PLACEMENT

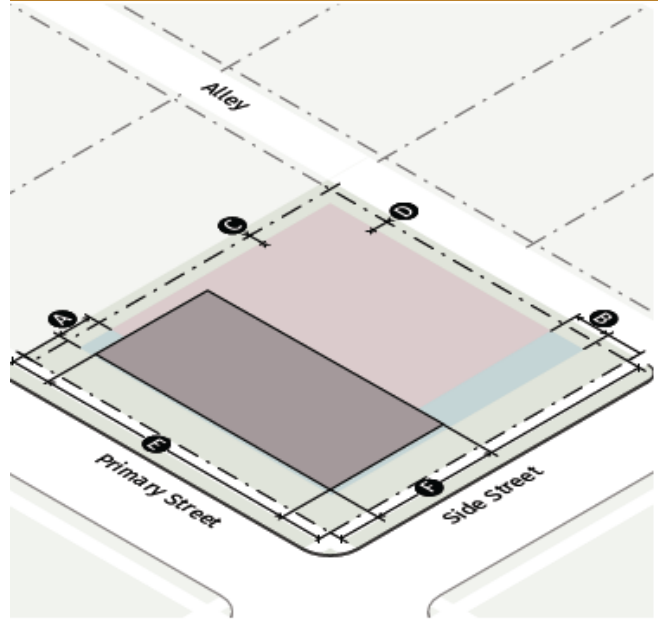

<b>Building Setbacks</b>		
A Primary Street		0'-10max
B Side Street		
C Side, Common lot line/alley		0'min
D Rear/alley		5' min
<b>Lot Frontage</b>		
E Primary Street		80% min
F Side Street		40% min

(5) HEIGHT AND MASS

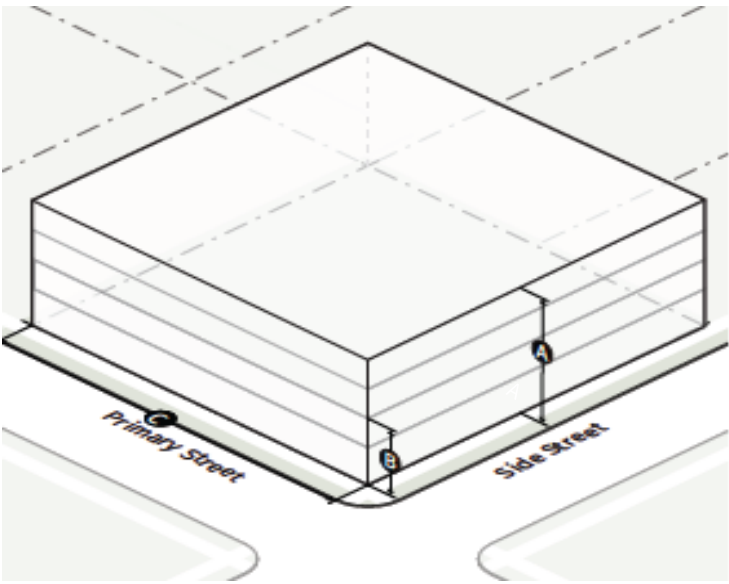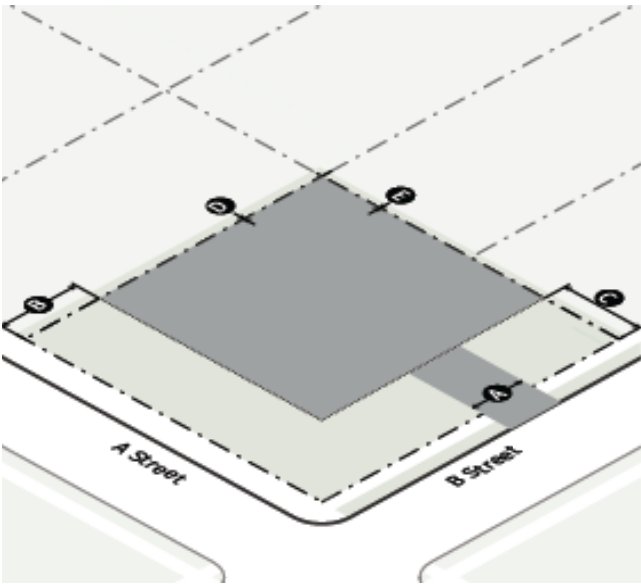

Access

New street curb-cuts allowed per lot      Determined by the Director

**A** Driveway width in setback      20' max

**\*Parking Setbacks**

**B** Primary street      10' min

**C** Side: common lot line      10' min

**D** Rear: common lot line      5' min

\*No on-site surface parking is allowed between buildings and the street.  
No more than 15% of required parking may be surface parking. Structured parking is required for all residential development. Commercial may have surface parking.  
No on-site surface parking is allowed between buildings and the street. Structured parking and rear parking is encouraged.

Building Height

Maximum height

**A** Within 30' of Main Street      3 stories

**A** Remaining area      4 stories

**B** Minimum height      1 stories

Building Mass

**C** Street-facing building length      60' max

## (6) PUBLIC REALM



The public realm standards below apply to all streets, unless noted otherwise.

**Transparency**

<b>A</b> Ground story	75% min
<b>B</b> Upper story	25% min
<b>C</b> Blank wall length	30' max
<b>Story Height</b>	
<b>D</b> Ground floor elevation	0' min/2' max
<b>E</b> Ground story, floor to floor	13' min
<b>F</b> Upper story: floor to floor	9' min
Entrance facing primary street	Required
<b>Building Elements Allowed</b>	
Awning/canopy	◆
Balcony	◆
Forecourt	◆
Gallery	◆
Porch	
Stoop	

**Setbacks**

Primary/side street	0' min/10' max
---------------------	----------------

**Sidewalk\***

Clear pedestrian zone	6' min
Street tree/Furniture zone	
Street tree/furniture zone depth**	6' min
Tree spacing**	Property corners

\*Where there is insufficient ROW to meet the minimum requirements, the Director may approve modifications. \*\*Not allowed on street corners.

# Chapter 8. LANDSCAPE

Applicability.....	10-2	Structural Screening.....	10-5
(1) New Construction	10-2	(1) Service Areas	10-5
(2) Additions	10-2	(2) Wall-Mounted Equipment	10-5
(3) Maintenance and Repair	10-2	(3) Roof-Mounted Equipment	10-5
(4) Change in Use	10-2	(4) Ground-Mounted Equipment	10-6
Buffers .....	10-2	Plant Material .....	10-6
(1) Landscape Buffers Required	10-2	(2) Understory Trees	10-6
(2) Location	10-3	(3) Overhead Utilities	10-6
(3) Encroachments	10-3	Walls and Fences.....	10-7
Parking Lots .....	10-3	(1) Materials	10-7
(1) Applicability	10-3	(2) Location	10-7
(2) Interior Islands	10-3	(3) Height	10-7
(3) Median Islands	10-4	Maintenance .....	10-7
(4) Perimeter Planting	10-4		
(5) Curbing	10-4		

## Applicability

### (1) New Construction

Any new building or site improvement must comply with the landscape requirements of this Division.

### (2) Additions

- A. When an existing building is increased in gross floor area or the site area is improved by up to 25% cumulatively, the landscape requirements of this Division apply to the additional area only.
- B. When an existing building is increased in gross floor area or the site area is improved by more than 25% cumulatively, the entire site must conform to the landscape requirements of this Division.

### (3) Maintenance and Repair

An existing building, use or site may be repaired, maintained or modernized without conforming to the landscape requirements of this Division, provided there is no increase in gross floor area or improved site area.


### (4) Change in Use

A change in use does not trigger the application of the landscape requirements of this Division except when there is a specific standard requiring landscape for the new use, such as a required landscape buffer.

## Sec. 38-747. Buffers

### (1) Landscape Buffers Required

One of the following buffer options is required along any perimeter lot line where screening is required.

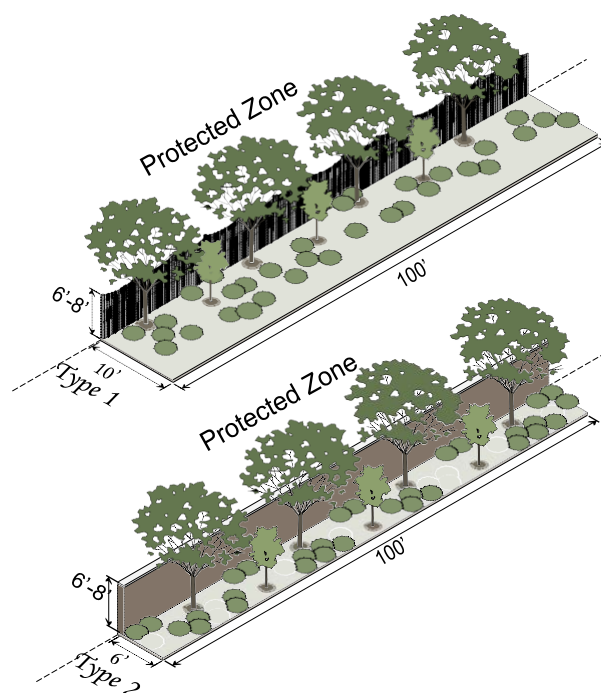

	Type 1	Type 2
Depth	15' min	10' min
Wall Height	--	Required Min: 6' Max: 8'
Fence Height	Required Min: 6' Max: 8'	--
Shade Trees (per 100')	4 min	4 min
Understory Trees (per 100')	3 min	3 min
Shrubs (per 100')	30 min	30 min

#### A. Trees in a Buffer

Trees must be distributed with a maximum spacing of 30 feet on center.


#### B. Shrubs in a Buffer

75% of all shrubs planted to meet the buffer requirements must be evergreen and be of a species that under typical conditions are expected to reach a height and spread of 4 feet within 3 years of planting. All shrubs must be a minimum of 2 feet tall when planted.



## (2) Location

- A. A required buffer must be located within the outer perimeter of the lot, parallel to and extending to the property boundary line. A required buffer must be provided along the entire property line immediately abutting the protected zone.

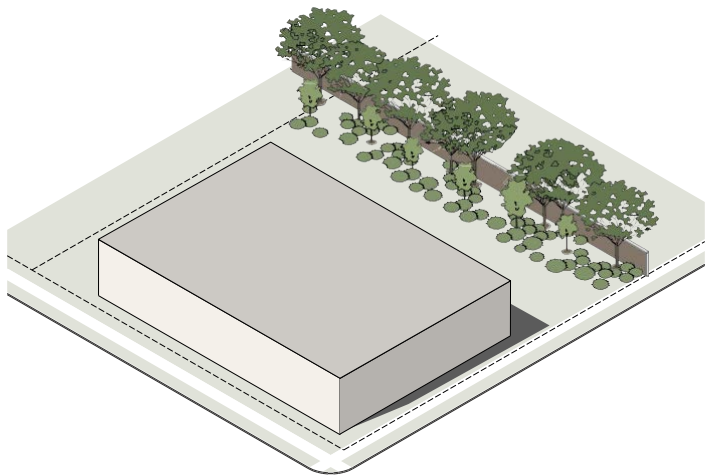

- B. A required buffer may not be located on any portion of an existing, dedicated or reserved right-of-way.

## (3) Encroachments


- A. The parking of vehicles and the placement of buildings, signs or structures, except for walls and fences, is not allowed in a required buffer.
- B. Breaks for pedestrian, bicycle and vehicle access are allowed. Driveways or walkways must cross a buffer at or near a perpendicular angle.

# Parking Lots

## (1) Applicability

Parking lot landscaping is required for all on-site surface vehicle parking areas. Multiple platted lots contained on a single site plan, under one owner

or development entity, and any separate parking areas connected with drive aisles are considered a single parking area.

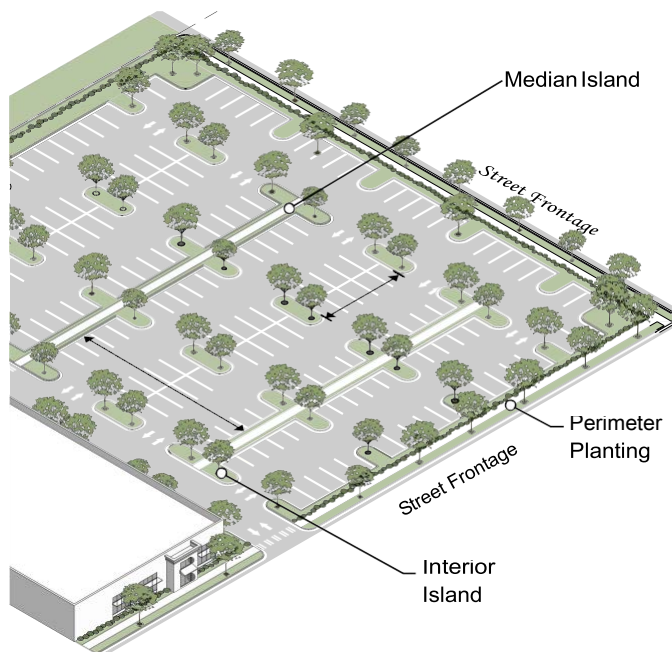

## (2) Interior islands

- A. Parking lots must be planted with trees at a minimum rate of 1 tree for every 10 parking spaces. Tree must be located within the parking lot. Required Perimeter Planting may not be substituted for Parking Lot Trees.
- B. A landscaped interior island must be provided every 10 parking spaces and at the end of every parking row and planted with at least one tree.
- C. An interior island abutting a single row of parking spaces must be a minimum of 13.5 feet in width and 200 square feet in area. This island must include 1 shade tree.
- D. An interior island abutting a double row of parking spaces must be a minimum of 13.5 feet in width and 400 square feet in area. This island must include 2 shade trees.

### (3) Median Islands

- A. A landscape median island must be provided between every 4 single rows of parking. Intervals may only be modified in order to preserve existing trees.
- B. To accommodate green infrastructure, any landscape median island must be a minimum of 6 feet wide. A landscape median island with a pedestrian walkway must be a minimum of 12 feet wide.

### (4) Perimeter Planting

#### A. Perimeter Planting Required

Perimeter planting is required along the outer perimeter of the entire parking area. Breaks for pedestrian, bicycle and vehicular access are allowed.

#### B. Trees Required


- 1. Class I shade trees are required and must be planted at an average rate of 30 feet on center along the entire perimeter. Any location where a tree is planted must have a minimum width of 6 feet.
- 2. Where Class I shade trees are planted in the abutting right-of-way at an average of 30 feet on center, they may substitute for shade trees required in the perimeter area.

#### C. Plant Material Options

The following options are considered equally acceptable for perimeter planting.

#### 1. Perimeter Planting with Shrubs


- a. A minimum 6-foot wide landscape strip planted with a continuous row of shrubs.

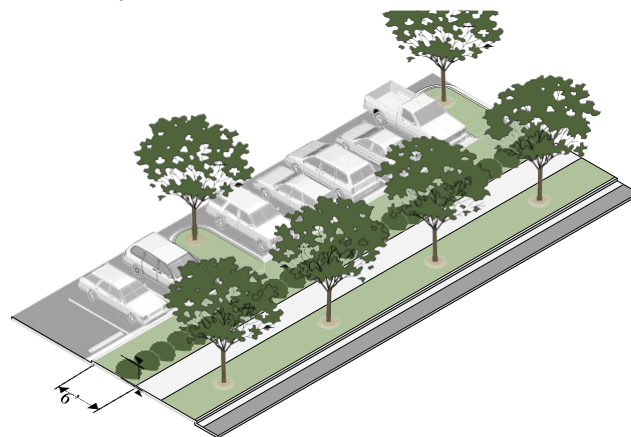

- b. All required shrubs must be of a species that under typical conditions are expected to reach a minimum height and spread of 3 feet within 3 years of planting. All shrubs must be a minimum of 2 feet tall when planted.

#### 2. Perimeter Planting with Wall

A minimum 4-foot wide landscape strip including shrubs, vines, ornamental grasses or ground cover with a minimum 3-foot high wall.

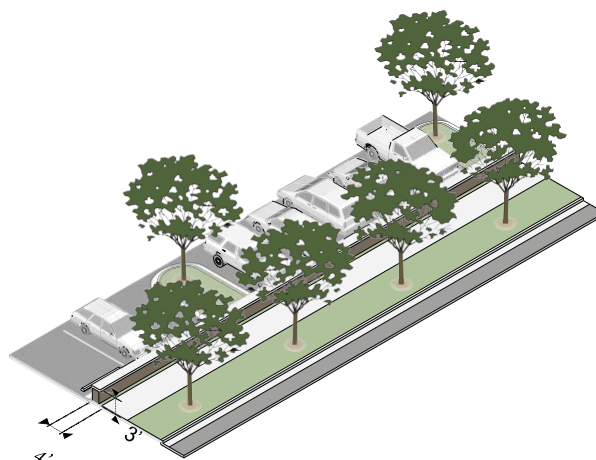


### (5) Curbing

Curbing, when provided, must have openings to allow drainage to enter and percolate through landscaped areas.

## Structural Screening

### (1) Service Areas


- A. Trash and recycling collection and other similar service areas must be located to the side or rear of buildings.
- B. Service areas must be screened on 3 sides by a wall a minimum of 6 feet in height or to the top of the equipment, whichever is higher up to 8 feet maximum. Service areas must be screened on the 4th side by a solid gate at a minimum of 6 feet in height.

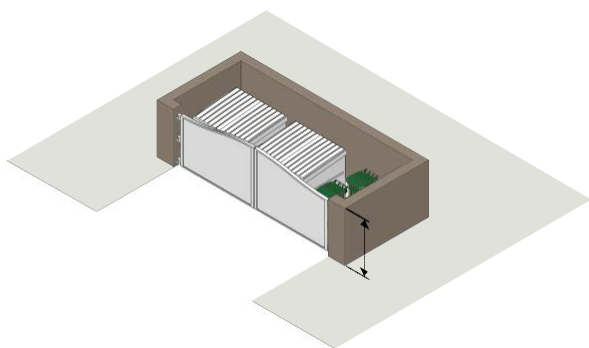

- C. The gate and wall must be maintained in good working order and must remain closed except when trash pick-ups occur.

### (2) Wall-Mounted Equipment


- A. Wall-mounted equipment located on any surface that is visible from a public street (not including alleys) must be fully screened by landscape or an opaque wall or fence that matches the principal building in terms of texture, quality, material and color.

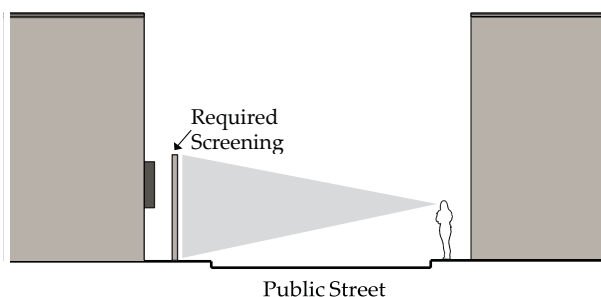

- B. Screening must be of a height equal to or greater than the height of the mechanical equipment being screened.

### (3) Roof-Mounted Equipment


- A. Roof-mounted equipment must be set back at least 10 feet from the edge of the roof.
- B. New buildings must provide a parapet wall or other architectural element that matches the principal building in terms of texture, quality, material and color that fully screens roof-mounted equipment from ground level view at the public street.

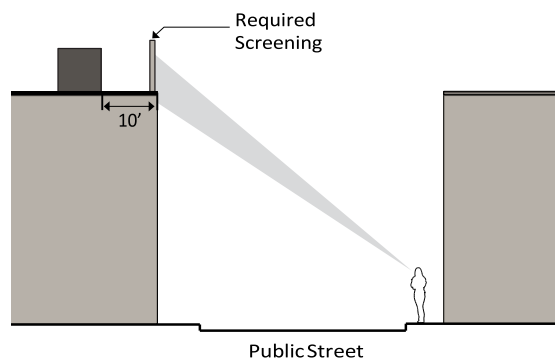

- C. For buildings with no or low parapet walls, roof-mounted equipment must be screened on all sides by an opaque screen that matches the principal building in terms of texture, quality, material and color.
- D. Roof-mounted solar panels are exempt from set back and screening requirements.

#### (4) Ground-Mounted Equipment

- A. Ground-mounted mechanical equipment that is visible from a public street (not including an alley) must be fully screened by landscape or an opaque wall or fence that is compatible with the principal building in terms of texture, quality, material and color.

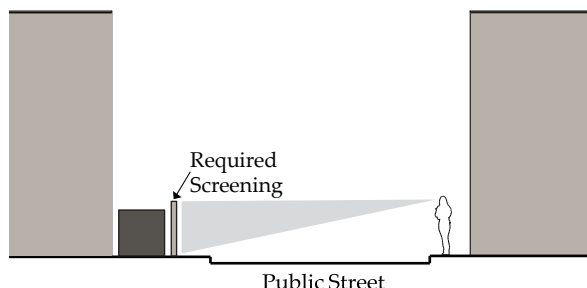

- B. Screening must be of a height equal to or greater than the height of the mechanical equipment being screened.

### Plant Material

#### (1) General Provisions

- A. Plant material standards only apply to landscape that is required by this Code.
- B. Plant materials must be locally hardy to their specific planting location.
- C. Plant materials must be able to survive on natural rainfall once established with no loss of health.
- D. Plant material is measured per American Standards for Nursery Stock, Latest Edition.
- E. No artificial plants, trees, or other vegetation may be installed as required landscape.
- F. Required landscape must be installed for full root contact with the surrounding subgrade. Planters planted on paved surfaces are not permitted.

#### (2) Understory Trees

- A. Understory trees (Class II Shade Trees) planted to meet the landscape requirements must be a locally-adapted species with an expected mature height of at least 20 feet and an expected mature crown spread of at least 10 feet.
- B. Single-stem understory trees planted to meet the landscape requirements must have a minimum caliper of 2 inches and have a 5-foot clear trunk before branching.
- C. Multi-stem understory trees planted to meet the landscape requirements must have a specified caliper of 2½ inches including one stem measuring 2 inches and have a 5-foot clear trunk before branching.

#### (3) Overhead Utilities

Overhead utilities shall be placed underground.

Where utilities, such as meters and conduit are exposed screening trees must be planted sufficiently to screen the utilities.

## Walls and Fences

### (1) Materials


- A. Walls must be constructed of high quality materials including decorative blocks, brick, stone, cast-stone, split-faced block, stucco over standard concrete masonry blocks or glass block.
- B. Fences must be decorative and constructed of high quality materials including; wrought iron; composite fencing or aluminum.
- C. No wall or fence may be constructed of tires, junk, or other discarded materials.
- D. Chain-link fence, barbed wire or concertina wire is not permitted.
- E. A wall or fence in a required buffer, or used as a required screen, must be opaque.

### (2) Location

- A. No wall or fence may be located within any required drainage or utility easement.
- B. The finished face of all walls and fences must be located toward the abutting property.
- C. For walls and fences located along a public right-of-way, the maximum length of a continuous, unbroken and uninterrupted fence or wall plane is 50 feet. Breaks must be provided through the use of columns or offsets.

### (3) Height

- A. Wall or fence height is measured from the subject property grade to the highest point of the fence.
- B. A wall or fence located in a side or rear setback may be no more than 8 feet in height. Fences over 6 feet require a building permit.
- C. A wall or fence located in a primary or side street setback may be no more than 6 feet in height, provided the area of the wall or fence above 4 feet in height is transparent.

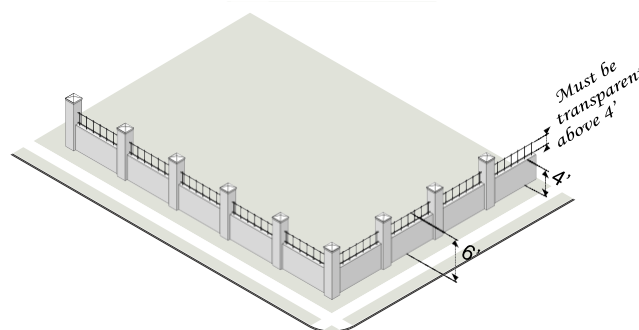

- D. A wall or fence in a required buffer or used as a required screen may be no less than 6 feet and no more than 8 feet in height.

## Maintenance

The property owner is responsible for maintaining all required landscape in good health and condition and the removal of any litter that has accumulated in landscaped areas. Any dead, unhealthy, damaged or missing landscape and screening must be replaced with landscape and screening that conforms to this chapter within 90 days (or within 180 days where weather concerns would jeopardize the health of plant materials). Any changes to required landscape elements require the submittal of a new site plan and City approval prior to construction.





## Chapter 9. SITE LIGHTING

Applicability.....	12-2
(1) New Fixtures	12-2
(2) Existing Fixtures	12-2
(3) Additions	12-2
(4) Change in Use	12-2
Lighting Standards.....	12-2
(1) Light Level Measuring	12-2
(2) Prohibited Sources	12-2
(3) Design and Installation	12-2
(4) Parking and Pedestrian Areas	12-2
(5) Flood Lights and Flood Lamps	12-3
(6) Vehicular Canopies	12-3
(7) Building Lighting	12-4

## Applicability

### (1) New Fixtures

All lighting fixtures installed after the effective date of this Town Center Code must conform to all applicable standards and requirements of this Chapter.

### (2) Existing Fixtures

- A. Routine maintenance, including changing the lamp, ballast, starter, photo control, fixture housing, lens and other required components, is allowed for all existing fixtures.
- B. The installation of site lighting, replacement of site lighting and changes to existing light fixture wattage, type of fixture, mounting or fixture location must be made in compliance with this Division.

### (3) Additions

When an existing building, use or site is increased in gross floor area or improved site area by more than 25% cumulatively, both the existing building, use or site and the additional floor or site area must conform to the lighting requirements of this Division.

### (4) Change in Use

A change in use does not trigger application of this Chapter.

## Sec. 38-757. Lighting Standards

### (1) Light Level Measuring

- A. Light levels are specified, calculated and measured in footcandles. All footcandles values are maintained footcandles.
- B. Measurements are to be made at ground level, with the light-registering portion of the meter held parallel to the ground pointing up.

### (2) Prohibited Sources

The following light fixtures and sources cannot be used:


- A. Cobra-head-type fixtures having dished or drop lenses or refractors, which contain sources that are not incandescent;
- B. Temporary searchlights and other high-intensity narrow-beam fixtures; and
- C. Light sources that lack color correction or do not allow for uniform site lighting.

### (3) Design and installation

- A. The maximum light level of any light fixture cannot exceed 0.5 footcandles measured at the property line of any Low Density Residential zone and 2.0 footcandles measured at the right-of-way line of a street.
- B. Lighting must not be oriented onto adjacent properties, streets or sidewalks.
- C. Service connections for all freestanding lighting fixtures must be installed underground.


### (4) Parking and Pedestrian Areas

- A. Light fixtures within vehicle parking areas may be no higher than 20 feet.
- B. Light fixtures within pedestrian areas may be no higher than 15 feet.

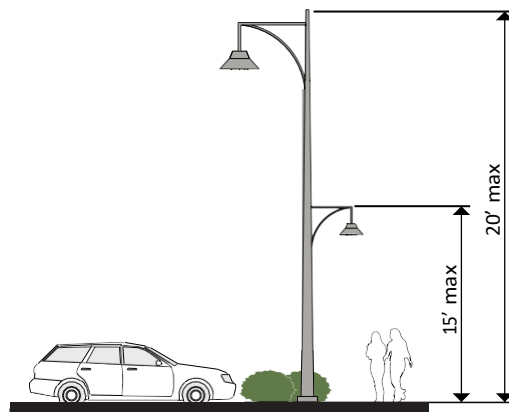


- C. Light fixtures located within 50 feet of the property line of a protected zone may be no higher than 15 feet.

- D. Light fixtures within 25 feet of a street right-of-way (not including an alley) must be forward throw fixtures.
- E. All light fixtures must be full cutoff, except as listed in paragraph F. below.

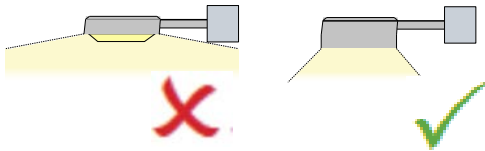


- F. Non-cutoff (unshielded) fixtures can be used for street lighting or when the maximum initial lumens generated by each fixture is less than 9,500 initial lamp lumens. These fixtures generally feature globes or vertical glass planes and must be coated with an internal white frosting to diffuse light.

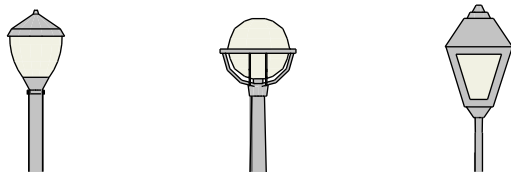


### (5) Flood Lights and Flood Lamps


- A. Flood light fixtures must either be aimed down at least 45 degrees from vertical or the front of the fixture shielded so that no portion of the light bulb extends below the bottom edge of the shield.

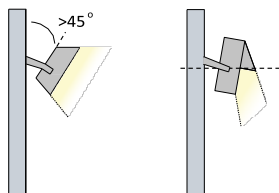

- B. Any flood light fixture located within 50 feet of a street right-of-way must be mounted and aimed perpendicular to the right-of-way, with a side-to-side horizontal aiming tolerance not to exceed 15 degrees.



- C. All flood lamps emitting 1,000 or more lumens must be aimed at least 60 degrees down from horizontal or shielded so that the main beam is not visible from adjacent properties or the street right-of-way.

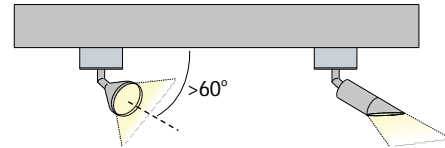


### (6) vehicular Canopies

Lighting under vehicular canopies must be less than 24 maintained footcandles and be designed to prevent glare off-site. Acceptable lighting designs include the following:


- A. Recessed

Recessed fixture incorporating a lens cover that is either recessed or flush with the bottom surface of the canopy;

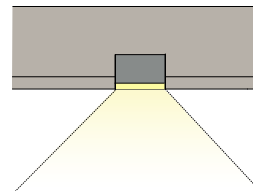


- B. Shielded

Light fixture incorporating shields or is shielded by the edge of the canopy itself, so that light is restrained to 5 degrees or more below the horizontal plane;

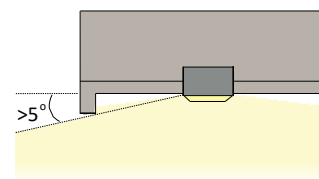


C. Surface Mounted

Surface mounted fixture incorporating a flat glass that provides a cutoff design or shielded light distribution; or

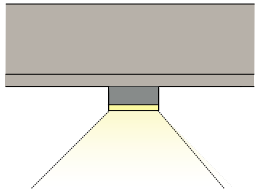


D. Indirect

Indirect lighting where light is beamed upward and then reflected down from the underside of the canopy, provided the fixture is shielded so that direct illumination is focused exclusively on the underside of the canopy.

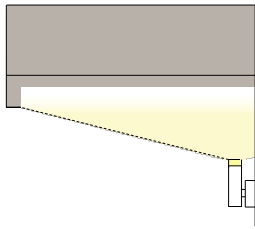

## (7) Building Lighting

- A. Lighting fixtures must be selected, located, aimed and shielded so that direct illumination is focused exclusively on the building facade, plantings and other intended site features and away from adjoining properties and the street right-of-way.
- B. All wall pack fixtures must be full cutoff fixtures.

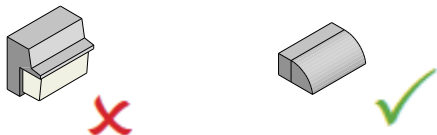

- C. Only lighting used to accent architectural features, landscape or art may be directed upward, provided that the fixture is located, aimed or shielded to minimize light spill into the night sky.

City of Sumner

# DESIGN AND DEVELOPMENT GUIDELINES

- Town Center Plan Area
- ~~Central Business District~~
- Commercial
- Multifamily
- Single-Family
- Industrial





# Table of Contents

---

A. Introduction.....	1
Purpose .....	1
When Do I Need to Comply? .....	1
Which Set of Guidelines Do I Need to Comply With? .....	1
How to Use This Document.....	2
How Are the Guidelines Applied? .....	2
Definitions.....	2
B. Definitions.....	1
1. Central Business District Guidelines.....	<b>1-Error! Bookmark not defined.</b>
Contents .....	1-30
Introduction.....	1-31
Applicability .....	1-31
Relationship to Sumner Municipal Code (SMC) .....	1-31
1.1 Site Design and Parking .....	1-32
Intent .....	1-32
Guidelines .....	1-32
1.2 Building Character and Massing.....	1-40
Intent .....	1-40
Guidelines .....	1-40
1.3 Building Details and Materials .....	1-47
Intent .....	1-47
Guidelines .....	1-47
1.4 Streetscape and Landscaping .....	1-56
Intent .....	1-56
Guidelines .....	1-56
2. Commercial Guidelines .....	2-1
Contents .....	2-1
Introduction.....	2-1
Applicability .....	2-1
Relationship to Sumner Municipal Code (SMC) .....	2-1
Sumner Urban Design Concept Plan .....	2-1
Sumner Town Center Plan .....	2-2
District Objectives.....	2-2
2.1 Site Design and Parking .....	2-3

## Table of Contents

Intent .....	2-4
Guidelines .....	2-4
2.2 Pedestrian Access and Amenities .....	2-14
Intent .....	2-14
Guidelines .....	2-14
2.3 Building Character and Massing.....	2-21
Intent .....	2-21
Guidelines .....	2-21
2.4 Building Details and Materials .....	2-29
Intent .....	2-29
Guidelines .....	2-29
2.5 Streetscape and Landscaping .....	2-33
Intent .....	2-33
Guidelines .....	2-33
3. Multifamily Design Guidelines.....	3-1
Contents .....	3-1
Introduction.....	3-1
Applicability .....	3-1
Relationship to Sumner Municipal Code (SMC) .....	3-1
3.1 Duplexes .....	3-2
Applicability .....	3-2
Intent .....	3-2
Guidelines .....	3-2
3.2 Cottage Housing.....	3-4
Applicability .....	3-4
Intent .....	3-4
Guidelines .....	3-4
3.3 Townhouse Guidelines.....	3-9
Applicability .....	3-9
Intent .....	3-9
Guidelines .....	3-10
3.4 Apartment Guidelines.....	3-14
Applicability .....	3-14
Intent .....	3-14
Guidelines .....	3-16
3.5 Site Design and Parking.....	3-20
Intent .....	3-20
Guidelines .....	3-21

## Table of Contents

3.6 Pedestrian Access and Amenities .....	3-28
Intent .....	3-28
Guidelines .....	3-28
3.7 Building Design .....	3-34
Intent .....	3-34
Guidelines .....	3-34
3.8 Building Details and Materials .....	3-37
Intent .....	3-37
Guidelines .....	3-37
3.9 Landscaping and Screening .....	3-41
Intent .....	3-41
Guidelines .....	3-41
4. <u>Single-Family Guidelines</u> .....	4-1
<u>Contents</u> .....	4-Error! Bookmark not defined.
<u>Introduction</u> .....	4-1
<u>Applicability</u> .....	4-1
<u>Relationship to Sumner Municipal Code (SMC)</u> .....	4-1
4.1 <u>Building Design</u> .....	4-2
<u>Applicability</u> .....	4-2
<u>Intent</u> .....	4-2
<u>Guidelines</u> .....	4-2
4.2 <u>Infill Single-Family Residential</u> .....	4-7
<u>Applicability</u> .....	4-7
<u>Intent</u> .....	4-7
<u>Guidelines</u> .....	4-7
4.3 <u>Subdivision Design</u> .....	4-8
<u>Applicability</u> .....	4-8
<u>Intent</u> .....	4-8
<u>Applicability</u> .....	4-13

## Table of Contents

<u>Intent</u> .....	4-13
<u>Guidelines</u> .....	4-13
5. Industrial Guidelines .....	5-1
Contents .....	5-1
Applicability.....	5-1
5.1 Site Design and Parking.....	5-2
Intent .....	5-2
Guidelines .....	5-2
5.2 Building Design .....	5-5
Applicability .....	5-5
Intent .....	5-5
Guidelines .....	5-5
5.4 Landscape Design.....	5-5
Applicability .....	5-5
Intent .....	5-5
Guidelines .....	5-6



# A. Introduction

---

## Purpose

As stated in the Comprehensive Plan, the Design and Development Guidelines are meant “to encourage development which enhances the human, pedestrian scale, creating a sense of community and place.” The following guidelines promote development which is consistent with the goals identified in the Community Character Strategy and Comprehensive Plan. These Guidelines are intended to supplement, and clarify the zoning and development standards for the public, and help facilitate the permitting process.

## When Do I Need to Comply?

All of the design standards apply to new construction and redevelopment and renovations within the City unless otherwise noted. Generally, the Zoning Code establishes thresholds between major and minor renovations/development. Relatively minor new construction and renovation is reviewed administratively and does not require Design Commission approval, whereas major new construction does.

Refer to the Zoning Code, SMC 18.40.020, for thresholds regarding the level of design review required for a specific project.

## Which Set of Guidelines Do I Need to Comply With?

The guidelines are organized into the following chapters:

1. **Town Center District**

~~1.2. **Central Business District (CBD)**~~

2. Commercial
3. Multifamily
4. Single-Family
5. Industrial

Most development needs to comply with only one of the chapters based on the type, zone, or location. For instance, development within the CBD needs to comply with the CBD guidelines; Multifamily development needs to comply with the Multifamily Guidelines. Developments featuring a mix of uses, however, may need to comply with two sets of guidelines. For instance, mixed-use developments will need to comply with the CBD or Commercial Guidelines depending on which zone they are located in, and portions of the Multifamily Guidelines. Details on how projects are applied are referenced at the beginning of each chapter under the “Applicability” section.



## How to Use This Document

The Design and Development Guidelines are intended to supplement the City of Sumner Zoning Code. Where there is a conflict between the guidelines herein and the zoning code, the guidelines shall apply<sup>[EM1]</sup>. Persons proposing development should consult these guidelines in the preparation of plans for review by the City.

Steps in the development and permitting process (See SMC 18.54):

- The applicant should consult the Comprehensive Plan and Zoning maps to determine within which planning area the proposed property for development is located.
- The applicant should consult the Zoning Code to determine the uses allowable on this property and the applicable development standards.
- The applicant should consult the Design and Development Guidelines for more specific illustrations of the goals of the Zoning Code.
- The applicant must check with the City staff to determine if there is a requirement for SEPA review.
- The applicant must check with the City staff to determine if there is a requirement for Pre-application review.

## How Are the Guidelines Applied?

Guidelines which are required are indicated by the use of the terms “shall be” or “must” provided. Guidelines which have some flexibility as to how the intent of the guideline can be met are indicated by the use of the terms “should” or “may.” A design review process will permit a review of design and development guidelines for each project.

## Definitions

Words within the guidelines that are *italicized* are defined in Chapter B.



## B. Definitions

---

All words within the guidelines that are *italicized* are defined herein.

### *Undefined words and phrases.*

The definition of any word or phrase not listed in the definitions which is in question when administering this title shall be defined by the Director from one of the following sources. The sources shall be utilized by finding the desired definition from source number one, but if it is not available there, then source number two may be used and so on. The sources are as follows:

- A. Any city of Sumner resolution, ordinance, code or regulation;
- B. Any statute or regulation of the state of Washington;
- C. Legal definitions from Washington common law or a law dictionary;
- D. The common dictionary.

***Articulation*** - means the giving of emphasis to architectural elements (like windows, balconies, entries, etc.) that create a complementary pattern or rhythm dividing large buildings into smaller identifiable pieces.

***Art, Artwork*** - A device, element, or feature whose primary purpose is to express, enhance, or illustrate aesthetic quality, feeling, physical entity, idea, local condition, historical or mythical happening, or cultural or social value. Examples of *artwork* include sculpture, bas-relief sculpture, mural, or unique specially crafted lighting, furniture, pavement, landscaping, or architectural treatment that is intended primarily, but not necessarily exclusively, for aesthetic purpose. Signs, upon approval by the Director, may be considered *artwork* provided they exhibit an exceptionally high level of craftsmanship, special material, or construction, and include decorative devices or design elements that are not necessary to convey information about the business or product. Signs that are primarily names or logos are not considered *art*.

***Balcony*** - An outdoor space built as an above-ground platform projecting from the wall or recessed into the wall of a building and enclosed by a parapet or railing.

***Blank walls*** - A wall (including building facades and retaining walls) is considered a *blank wall* if:

- (a) A ground floor wall or portion of a ground floor wall over 6 feet in height has a horizontal length greater than 15 feet and does not include a transparent window or door; or
- (b) Any portion of a ground floor wall having a surface area of 400 square feet or greater does not include a transparent window or door.

***Building entrance, primary*** - Is the entrance established as the main access point for customers.

***Building entrance, secondary*** - Is the entrance which is a fire exit, employee only, and/or service access.

***Courtyard*** - A landscaped space enclosed on at least three sides by at least single structure.

**Fenestration** - The design, proportioning, and disposition of windows and other exterior openings of a building.

**Green roof** - A *green roof* is a roof of a building that is partially or completely covered with vegetation and soil, or a growing medium, planted over a waterproofing membrane. This does not refer to roofs which are merely colored green, as with green shingles. Container gardens on roofs, where plants are maintained in pots, are not generally considered to be true *green roofs*.

**Franchise and Corporate Architecture** - Franchise architecture is a building design that is trademarked, branded, or easily identified with a particular chain or corporation and is ubiquitous in nature. Some typical issues and negative impacts often associated with national chain or commercial franchise designs include:

- (1) Large logos and/or colors used over large expanses of a building;
- (2) Branded buildings are difficult to reuse if vacated by the primary business promoting vacancies and blight; and
- (3) Buildings lack architectural elements and design consistent with the local community's architectural composition, character, vernacular, and historic context.

**Hard Surface** – Capable of supporting pedestrian and ADA traffic and shall not include dirt and gravel surfaces.

**Human scale** – The perceived size of a building relative to a human being.

**Landscaping Type A** - A dense landscaping screen separating different uses. Specifically:

- (1) For landscaping strips 10 to 15 feet wide:
  - At least one row of evergreen trees, minimum 8 feet in height and 10 feet maximum separation.
  - Permitted evergreen tree species are those with the ability to develop a minimum branching width of 8 feet within 5 years.
  - Shrubs at a rate of one shrub per 20 square feet of landscaped area.
  - Shrubs shall be at least 16 inches tall at planting and have a mature height between 3 and 4 feet.
  - Ground cover.
  - Bioretention cells, swales, or other SLID measures can be incorporated into these landscaping strips. See 18.41.120 for more details
- (2) For landscaping strips wider than 15 feet:
  - A minimum of one evergreen tree at least 8 feet tall for every 150 square feet arranged in a manner to obstruct views into the property.
  - Permitted evergreen tree species are those with the ability to develop a minimum branching width of 8 feet within 5 years.
  - Shrubs and ground cover as required above.

- Bioretention cells swales, or other SLID measures can be incorporated into these landscaping strips. See 18.41.100 for more details.

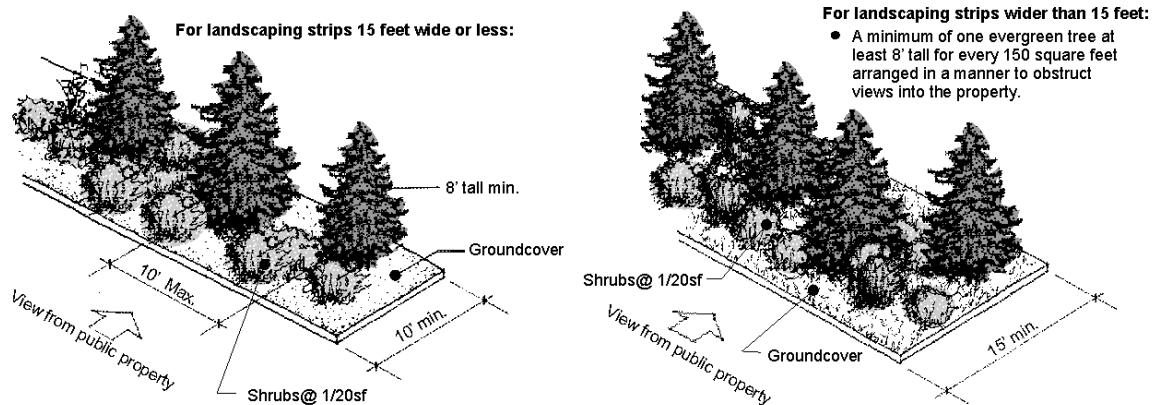


Figure B-1. Landscaping Type A.

**Landscaping Type B** - A moderately dense and naturalistic vegetation screen to offer visual relief and integrate built elements into the natural environment. Specifically:

(1) For landscaping strips less than 15 feet wide:

- Informal groupings of evergreen (minimum 8 feet in height) and/or deciduous trees (minimum 2 inch caliper as measured 4 feet from the root ball). At least 50 percent of the trees must be evergreen. Trees to be spaced at an average of 20 feet on-center, but may be grouped in asymmetrical arrangements.
- Permitted tree species are those with the ability to develop a minimum branching width of 8 feet within 5 years.
- Shrubs at a rate of one shrub per 20 square feet of landscaped area. Shrubs shall be at least 16 inches tall at planting and have a mature height between 3 and 4 feet.
- Ground cover.
- Bioretention cells swales, or other SLID measures can be incorporated into these landscaping strips. See 18.41.100 for more details.

(2) For landscaping strips wider than 15 feet:

- At least one tree per 300 square feet of landscaped area. At least 50 percent of the trees must be evergreen.
- Tree species, shrubs, and ground cover as required above.
- Bioretention cells swales, or other SLID measures can be incorporated into these landscaping strips. See 18.41.100 for more details.

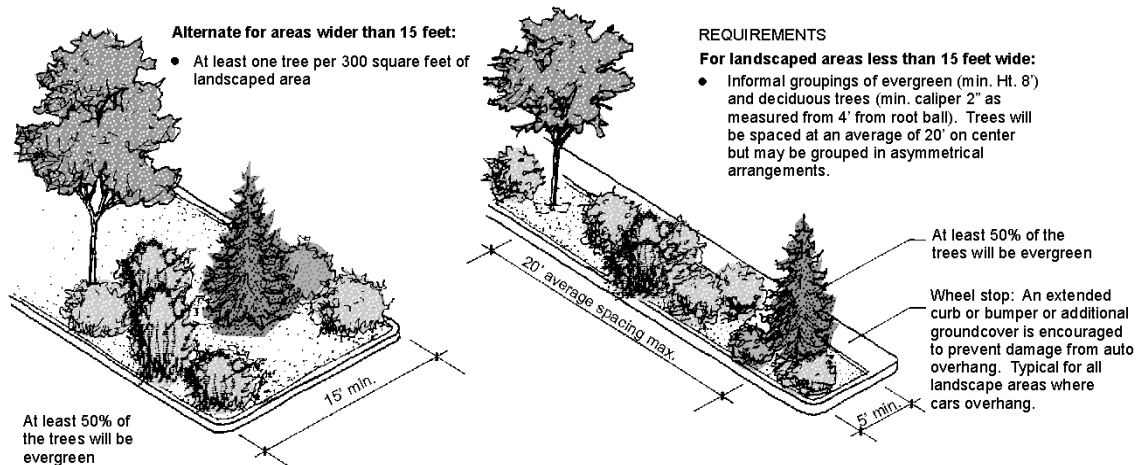


Figure B-2. Landscaping Type B.

**Landscaping Type C** - Landscaping provides visual relief in parking areas and along roadways where both a canopy of trees and visibility is required.

(1) For landscaping strips 5 to 20 feet wide:

- Trees at 20 feet on-center (minimum 2 inch caliper as measured 4 feet from the root ball).
- Permitted tree species are those that reach a mature height of at least 35 feet.
- Shrubs at a rate of one shrub per 20 square feet of landscaped area. Shrubs shall be at least 16 inches tall at planting and have a mature height between 3 and 4 feet.
- Ground cover.
- Bioretention cells swales, or other SLID measures can be incorporated into these landscaping strips. See 18.41.100 for more details.

(2) For landscaping strips wider than 20 feet:

- At least one tree per 300 square feet of landscaped area or 20 foot separation (on average). Place trees to create a canopy in desired locations without obstructing necessary view corridors.
- Tree species, shrubs, and ground cover as required above.
- Bioretention cells swales, or other SLID measures can be incorporated into these landscaping strips. See 18.41.100 for more details.

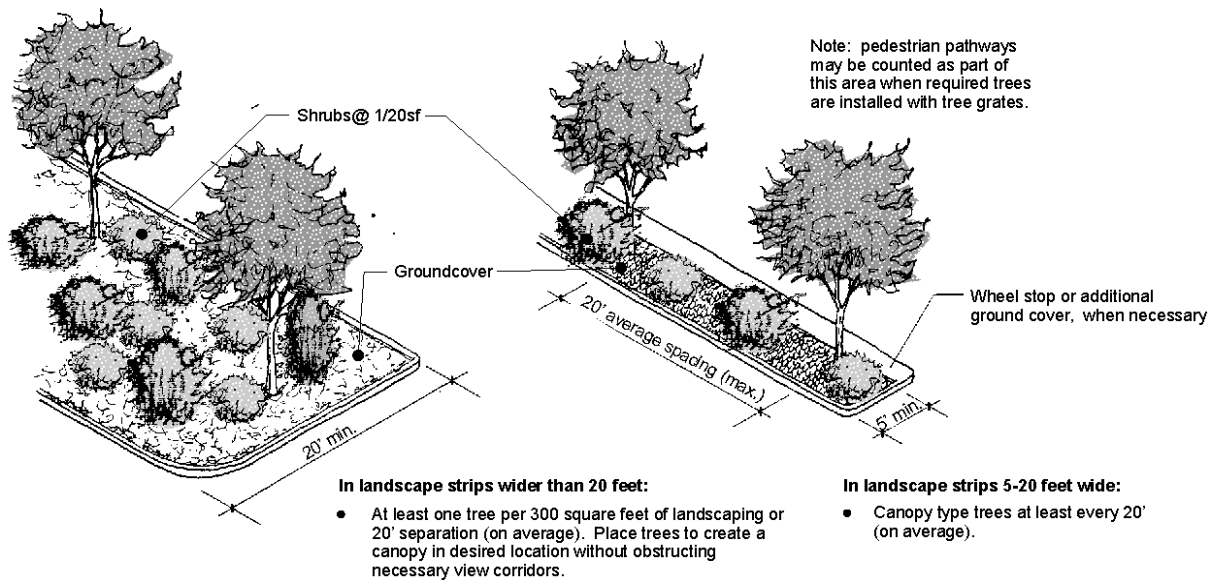


Figure B-3. Landscaping Type C.

**Landscaping Type D** - A decorative landscaped display with colorful flowers or foliage as a focal setting for signs, special site elements and/or high visibility or pedestrian areas. Specifically:

- (1) Shrubs, at least 50 percent of which must exhibit decorative floral or foliage, shall cover at least 50 percent of the landscaped area. They shall be planted to cover the allocated area within 3 years.
- (2) The remaining 50 percent of the landscaped area may be planted with trees, shrubs, ground cover, or cultivated flower beds.

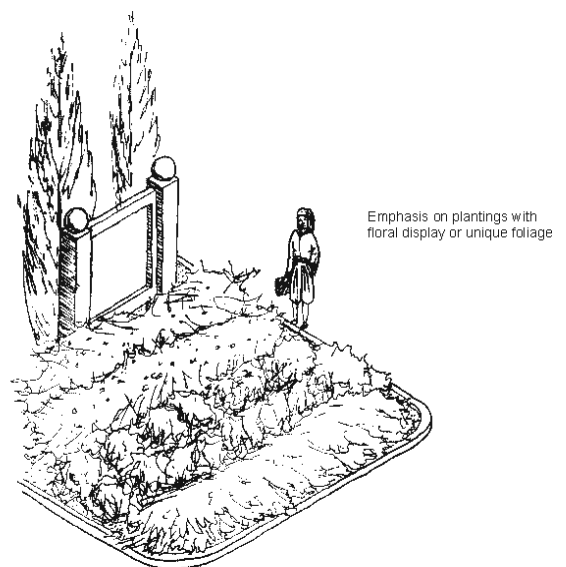


Figure B-4. Landscaping Type D.

**Landscaping Type E** - Enhancing natural areas to better integrate developments into existing conditions. Specifically:



- (1) Landscaping shall consist of trees, shrubs, and ground covers that are native to the Puget Sound and are appropriate to the conditions of the site. Species are subject to the approval by the Director.
- (2) Arrangement of plants shall be asymmetrical and plant material shall be sufficient in quantity to cover the soil in one growing season.
- (3) Minimum 20 feet in width if used as a screen or required front yard treatment.

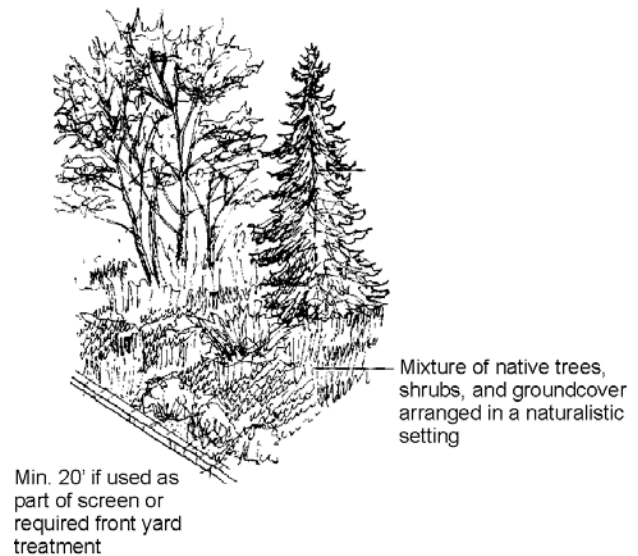


Figure B-5. Landscaping Type E.

**LEED** – Refers to the Leadership in Energy and Environmental Design (LEED) Green Building Rating System™, which is the nationally accepted benchmark for the design, construction, and operation of high performance green buildings. Web information:  
<http://www.usgbc.org/DisplayPage.aspx?CategoryID=19>

**Modulation** - A stepping back or projecting forward of portions of a building facade within specified intervals of building width and depth, as a means of lessening the apparent bulk of a structure's continuous exterior walls

**Multifamily** - A building that is designed to house more than one family and cottage houses. Examples would be a multiplex, townhouses, condominiums, or apartment building.

**Pedestrian-oriented facade** - Ground floor facades that contain the following characteristics:

- (a) Transparent window area or window displays along a minimum of 75 percent of the ground floor facade between a height of 2 to 8 feet above the ground.
- (b) The primary building entry must be on this facade.
- (c) Weather protection at least 5 feet in width and a height accentuating the design of the structure while providing protection to the pedestrian along at least 75 percent of the facade width.

**Pedestrian-oriented space** - To qualify as *pedestrian-oriented space*, the following must be included:

- (a) To qualify as a *pedestrian-oriented space*, an area must have:
- Pedestrian access to the abutting structures from the street, private drive, or a non-vehicular *courtyard*.
  - Paved walking surfaces of either concrete or approved unit paving.
  - Pedestrian-scaled lighting (no more than 14 feet in height) at a level averaging at least 2-foot candles throughout the space. Lighting may be on-site or building-mounted lighting.
  - At least 3 feet of seating area (bench, ledge, etc.) or one individual seat per 60 square feet of plaza area or open space.
  - Spaces must be positioned in areas with significant pedestrian traffic to provide interest and security – such as adjacent to a building entry.
  - Landscaping components that add seasonal interest to the space.
- (b) The following features are encouraged in *pedestrian-oriented space*:
- Pedestrian amenities such as a water feature, drinking fountain, and/or distinctive paving or *artwork*.
  - Provide *pedestrian-oriented facades* on some or all buildings facing the space.
  - Consideration of the sun angle at noon and the wind pattern in the design of the space.
  - Transitional zones along building edges to allow for outdoor eating areas and a planted buffer.
  - Movable seating.
  - Bicycle rack.
- (c) The following features are prohibited within *pedestrian-oriented space*:
- Asphalt or gravel pavement.
  - Adjacent unscreened parking lots.
  - Adjacent chain link fences.
  - Adjacent blank walls.
  - Adjacent dumpsters or service areas.



# 1. Town Center Plan Guidelines

---

## Contents

<u>1. Town Center Plan Guidelines.....</u>	<u>1</u>
<u>1.1 Site Design and Parking .....</u>	<u>2</u>
<u>1.2 Building Character and Massing .....</u>	<u>11</u>
<u>1.3 Building Details and Materials.....</u>	<u>15</u>
<u>1.4 Streetscape, Landscaping, and Signage.....</u>	<u>23</u>
<u>1.5 District Specific Guidelines.....</u>	<u>XX</u>

## Introduction

As described in the Sumner Comprehensive Plan, the Town Center Plan area intends to reinforce and strengthen the Sumner Downtown as a fully functional “everyday” downtown maintaining its classic small town character. The Downtown, centered on Main Street, continues to be a focal point of the community with its concentration of businesses and civic uses, and by virtue of its character and history. In 2000 the City and Sound Transit re-established a rail station on the original 1883 train site, south of Main Street along the Burlington Northern/Santa Fe Line. In order to build upon the success of Sound Transit, the City has developed the Town Center Plan area to focus growth and development near the Sounder train station. The goal of the Town Center Plan is to encourage development that not only supports the station and alternative travel options, but also to further enhance Downtown in accordance with the community vision:

- Sumner, a city of excellence reinforcing its role as classic, small town Americana that goes beyond nostalgia, and
- Sumner, a community that retains/strengthens a fully functional, “everyday” downtown.

The Plan also serves to be a roadmap to revitalizing downtown as a vibrant gathering place, a stable commercial core, and a neighborhood providing a variety of housing options for small families, empty nesters, and other households to live in proximity to the rail station and Downtown businesses.

a focal point for the City, providing major retail and commercial services. The area also maintains a special cultural status as the historical center of the City as well as serving as a community center for the surrounding region. Developed in the early 1900s, the Downtown maintains a variety of small scaled retail and commercial structures and residential uses. It is intended that this area maintain and improve its pedestrian oriented character, as well as enhance the existing small- and medium-sized, independent business fabric. It is not intended that Downtown have a particular theme, but that it maintain its fairly fine-grained signage, building materials, and detailing. Preservation and rehabilitation of Downtown’s historic structures are encouraged to reinforce Sumner’s distinctive character. Reference Zoning ordinance section 18.16.

### Applicability

These guidelines apply to all new development and re-development within the Town Center Plan (see SMC 18.40.XXX). For mixed-use buildings featuring residential uses, the residential portion of the building/site shall comply with the Multifamily Design Guidelines addressing open space and building design.

### Relationship to Sumner Municipal Code (SMC)

These guidelines shall serve as a supplement the standards of SMC. Where there is a conflict between the guidelines herein and the standards in SMC, these guidelines shall apply as they are more specific in nature.

## **1.1 Site Design and Parking**

### **Intent**

- ◆ To create streets which are safe and attractive to pedestrians.
- ◆ To provide connectivity, activity and interest along the street.
- ◆ To create streets that are more pedestrian and less auto focused.
- ◆ To create a sense of enclosure by requiring development to orient toward the street.
- ◆ To reduce the visual impact of parking lots and *blank walls* located adjacent to the street.
- ◆ To encourage developments to integrate *pedestrian-oriented spaces* into projects.

### **Guidelines**


**1.1.1 Building location.** Buildings must be located adjacent to the sidewalk and feature *pedestrian-oriented facades*. This includes:

- a) Primary building entry on this facade.
- b) For commercial space on the ground floor:
  - a. Transparent windows and doors covering at least 75 percent of the facade between 2 and 8 feet above the ground.

Exceptions:

    - i) Buildings may be set back from the sidewalk provided the space between the sidewalk and the building meets the definition of a *pedestrian-oriented space*.
    - ii) For street corner buildings, the Director will consider reducing the transparency requirement to 50 percent of the ground floor facade between 2 and 8 feet above the sidewalk provided the facade incorporates sufficient design details that provide visual interest at a pedestrian scale. Facades along Main Street shall not qualify for this exception.
  - b. Pedestrian weather protection at least 5 feet wide along at least 75 percent of the building's front face. Wider weather protection features are encouraged to provide for outdoor seating areas. The weather protection may be in the form of awnings, marquees, canopies, arcades, or building overhangs. Gaps in the covering allow for visual variety in the facade through the use of architectural features and/or landscaping components.
- c) For residential space on the ground floor:
  - a. For townhouses and row housing, entrances should be raised or lowered and accessed via a stoop, or similar stair case access.
  - b. Where access is provided to multiple tenants a singular access point is preferable and may be provided at the rear of the building.

## Town Center Plan Guidelines

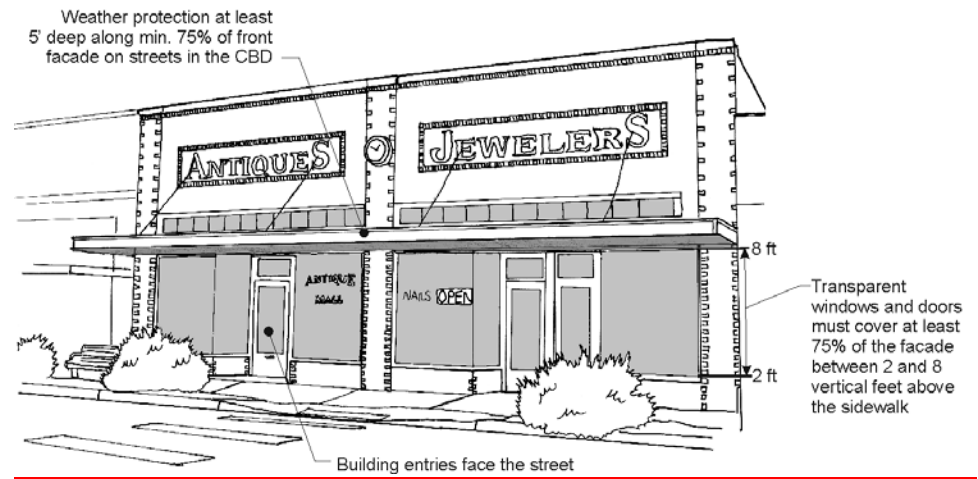

*Figure 1-1. Standards for pedestrian-oriented facades.*



*Figure 1-2. Examples of a pedestrian-oriented facades in Downtown Sumner.*





[EM3]

**Figure 1-3. Examples of a residential street frontage.**

### 1.1.3 Parking location and design:

- a) Main Street: New surface parking lots or ground floor structured parking fronting Main Street are prohibited.
- b) All other streets: Parking shall be located behind or under structures and away from streets. Where at least some street front surface or structured parking and vehicular access is unavoidable, as determined by the Director, no surface parking may occupy the street frontage. Structured parking (parking garage) may occupy the street frontage with appropriate screening elements. Vehicle access shall be limited from the street and should be shared by multiple users as applicable. Surface parking lots shall be screened from the sidewalk by one of the following methods:
  - i) Provide a 5-foot wide planting bed that incorporates a continuous low wall (approximately 3 feet tall). The planting bed shall be in front of the wall and feature *Landscaping Type C*. Alternative landscaping schemes will be considered by the Director provided they meet the intent of the guidelines. The wall shall be constructed of brick, stone, decorative concrete or concrete block, or other permanent material that provides visual interest and helps to define the street edge as determined by the Director. See Figure 1-5 for an example.


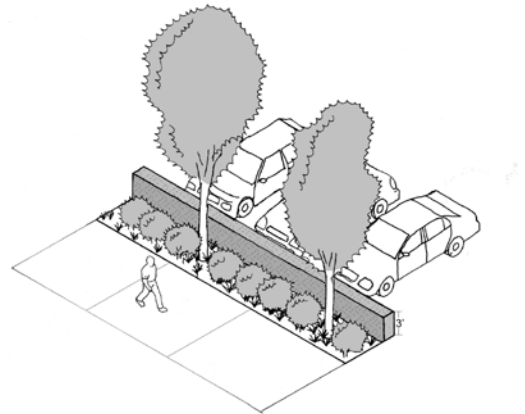



Figure 1-5. Parking lot planting buffer with low wall.

- ii) Provide an elevated planter which is a minimum of 5 feet wide and between 2 and 3 feet in height. Ledges that are approximately 12 inches in width are encouraged as they can double as a seating area. The planter must be constructed of masonry, concrete or other permanent material that effectively contrasts with the color of the sidewalk and combines groundcover and annuals, perennials, ornamental grasses, low shrubs, and/or small trees that provide seasonal interest as determined by the Director. See Figure 1-6 as an example.

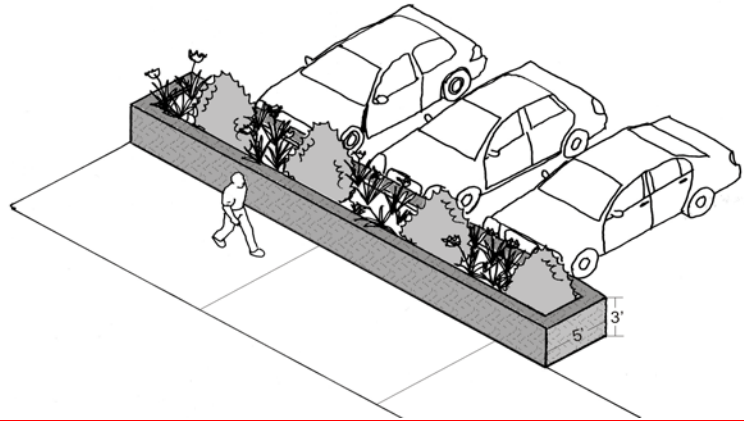

*Figure 1-66. Elevated parking lot planting buffer.*

Both options (i) and (ii) should choose and maintain plantings to maintain eye level visibility between the street/sidewalk and parking area for safety. This means that shrubs and other low plantings should be maintained below 3 feet in height while trees (once they achieve taller heights) should generally be trimmed to up to the 8-foot level. See Figure 1-7.

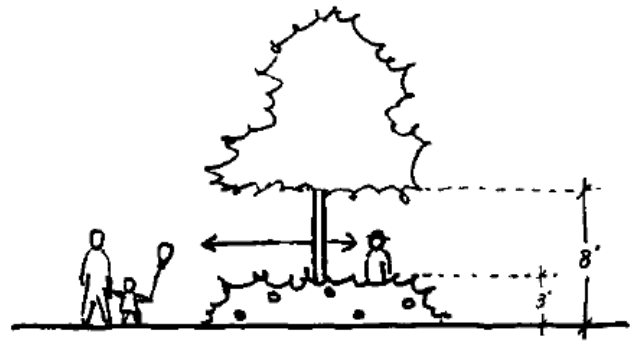

*Figure 1-7. Parking lot planting buffers shall emphasize the 3:8 rule for visibility and safety.*

c) Surface or structured parking lots may not be located adjacent to street corners, but the Director may make exceptions for any street, except for Main Street, provided the development includes a special corner treatment that mitigates negative visual impacts of a parking lot, including applicable sight distance requirements, and adds character and identity to the Town Center. Examples could include:

- i) Install distinctive landscaping (covering an area at least 20 feet by 20 feet or 400 SF) with a combination of groundcover and shrubs or trees. Such landscaping should be designed to provide special interest in all four seasons.
- ii) Include a special architectural element, such as a trellis, to add identity or demarcation of the area.

Such landscaping or architectural element may have a sign or mural incorporated into it (as long as such sign does not identify an individual business or businesses).

**1.1.4 Vehicular access and curb cuts.** In the Historic District new driveways onto any street are prohibited. Access to all other off-street parking areas shall be from existing alleys.

## Town Center Plan Guidelines

All other Districts shall limit the parking access from the street. Shared driveways and access are recommended when possible. An easement(s) for public and/or future access may be required.

Exception: New driveways accessing parking lots approved per Guideline 1.1.3 may be permitted by the Director where it is determined that such a driveway will not adversely impact the pedestrian environment

**1.1.5 Street corner sites.** All buildings located at the intersection of streets are encouraged to include design elements that accentuate their street corner location. Consider orienting the primary entrance to the corner. Cropped or notched building corners that provide for small *pedestrian-oriented spaces* adjacent to the street corner are encouraged.

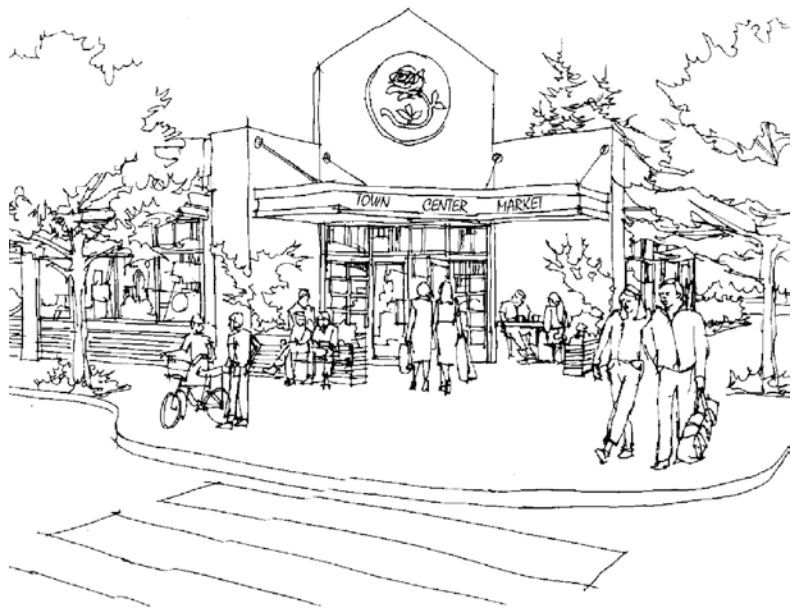


Figure 1-8. Street corner development example.

**1.1.6 Open space.** Commercial developments within the Town Center Plan and in the Activity Nodes or Public Space designations are required to provide *pedestrian-oriented space*. Commercial developments in the Historic District are not required, to incorporate open spaces into the design of the site, but *pedestrian-oriented space* is encouraged to provide for gathering spaces Downtown. Desirable locations for *pedestrian-oriented space* are:

- a) Between the sidewalk and the building entrance.
- b) Adjacent to the street corner.
- c) Adjacent to a building's secondary entrance (off the alley).
- d) On rooftops as a patio or garden.



Figure 1-7. Examples of pedestrian-oriented spaces located adjacent to sidewalks.

### 1.1.7 Pedestrian-oriented space guidelines:

- a) To qualify as a *pedestrian-oriented space*, an area must have all of the following:
  - i) Pedestrian access to the abutting structures from the street, private drive, or a non-vehicular *courtyard*.
  - ii) Paved walking surfaces of either concrete or approved unit paving.
  - iii) Pedestrian-scaled lighting (no more than 14 feet in height) at a level averaging at least 2-foot candles throughout the space. Lighting may be on-site or building-mounted lighting.
  - iv) At least 3 feet of seating area (bench, ledge, etc.) or one individual seat per 60 square feet of plaza area or open space.
  - v) Spaces must be positioned in areas with significant pedestrian traffic to provide interest and security – such as adjacent to a building entry.
  - vi) Landscaping components that add seasonal interest to the space.
- b) The following features are encouraged in *pedestrian-oriented space*:
  - i) Pedestrian amenities such as a water feature, drinking fountain, and/or distinctive paving or *artwork*.
  - ii) Provide *pedestrian-oriented facades* on some or all buildings facing the space.
  - iii) Consideration of the sun angle at noon and the wind pattern in the design of the space.
  - iv) Transitional zones along building edges to allow for outdoor eating areas and a planted buffer.
  - v) Movable seating.
- c) The following features are prohibited within *pedestrian-oriented space*:
  - i) Asphalt or gravel pavement.
  - ii) Adjacent unscreened parking lots.
  - iii) Adjacent chain link fences.
  - iv) Adjacent *blank walls*.
  - v) Adjacent dumpsters or service areas.



- vi) Outdoor storage or retail sales that do not contribute to the pedestrian environment. An example is stacked bags of potting soil or compost, which are common in front of grocery stores during the spring and summer. The area used for such purposes will not be counted as *pedestrian-oriented space*.

### 1.1.8 Service and utility elements guidelines:

- a) Dumpsters, refuse and recycling containers, loading, mechanical areas, utility meters, electrical conduit, and other service/utility elements shall be located in alleys where available. Where alleys are not available or alternative location is necessary, service elements shall be located and designed to minimize the impacts on the streetscape and customer parking areas. Solid waste receptacles visible from the street, customer parking areas, and residential units shall be surrounded on at least three sides by a site obscuring fence or wall. Chain link fencing with slats may be used for gates but not for the enclosure. Landscaping elements surrounding such screen walls are encouraged.
- b) All rooftop mechanical equipment shall be organized, proportioned, detailed, landscaped (with decks or terraces) and colored to be an integral element of the building.
- c) Exterior hose bibs must be located as to not interfere with access to entryways.
- d) No large outside item display areas are permitted (e.g. kitchen appliances or other similarly large merchandise that is visible from the street).
- e) Exterior mechanical devices shall conform to SMC 18.16.080(A) concerning noise impacts.
- f) Dumpster, refuse, and recycling containers shall be well maintained. Doorways shall be closed when not being serviced.
- g) Exterior electrical utilities, such as transformer boxes, shall be developed in a manner that provides visibility and shall include artwork murals to deter graffiti. These areas may include pedestrian amenities such as seating or plantings that reduce the visual impact<sup>EM41</sup>.

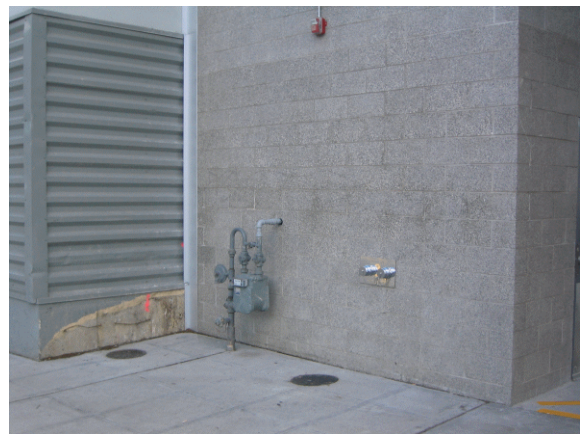


Figure 1-9. Avoid exposed utility meters along the sidewalk, like this.





## **1.2 Building Character and Massing**

### **Intent**

- ◆ Preserve historic details in buildings which typify Downtown Sumner's small town character.
- ◆ Encourage preservation, rehabilitation, restoration, or reconstruction of historical properties based on appropriate historic information, materials, and methods.
- ◆ Reduce the bulk and mass of buildings compatible with Sumner's small sense of scale.
- ◆ Preserve Sumner's traditional, compact, pedestrian-scaled network.
- ◆ Maintain compact rhythm of storefronts.
- ◆ Avoid a generic appearance and chain or franchise architecture that is trademarked, branded, or easily identified with a particular national or regional chain or commercial franchise.

### **Guidelines**

#### **1.2.1 Historic District:**

**Historic building guidelines and standards.** Property owners of early 20<sup>th</sup> century buildings are encouraged to use the "Secretary of Interior's Standards for the Treatment of Historic Properties" (web: <http://www.cr.nps.gov/hps/tps/standards/>) (hard copy also available at City Hall) as a guide to preserve, rehabilitate, restore, or reconstruct historic properties. These standards provide detailed recommendations on restoration, maintenance, repair, replacement, design, alterations, building materials, roofs, interiors, etc.

The restoration of older buildings to their original condition is encouraged. Historic photographs are extremely useful in determining historic precedent and should be used by owners interested in improving their historic properties. Renovations shall not cover or hide original windows or details with siding, paneling or signage.

If historic facade elements are missing, use a simplified interpretation of similar nearby historic facades. Do not replace facade elements with new interpretations unless evidence of the original is missing. New designs should continue the character of the original.



*Figure 1-80. Historical photographs are extremely useful in determining historic precedent. Building owners are thus strongly encouraged to consult historic images of their building prior to making any facade changes. This 1930 image looks west down Main Street.*


**1.2.2 Non-period architecture.** Existing architecture which is not consistent with the early 1900 style and represents later periods is also encouraged to celebrate distinctive design features, except where such features conflict with other standards and guidelines herein, as determined by the Director. Renovations of these structures should facilitate pedestrian access. Unique signage and design elements which are not inconsistent with the remainder of the guidelines are to be encouraged.

## Town Center Plan Guidelines

**1.2.3 No franchise and corporate architecture.** The use of stock building plans, typical corporate and/or franchise designs, “regional prototype alternatives,” or other designs which are easily identified with a particular chain or corporation are not allowed.



*Figure 1-91. Generic franchise and corporate architecture is not allowed in the CBD.*

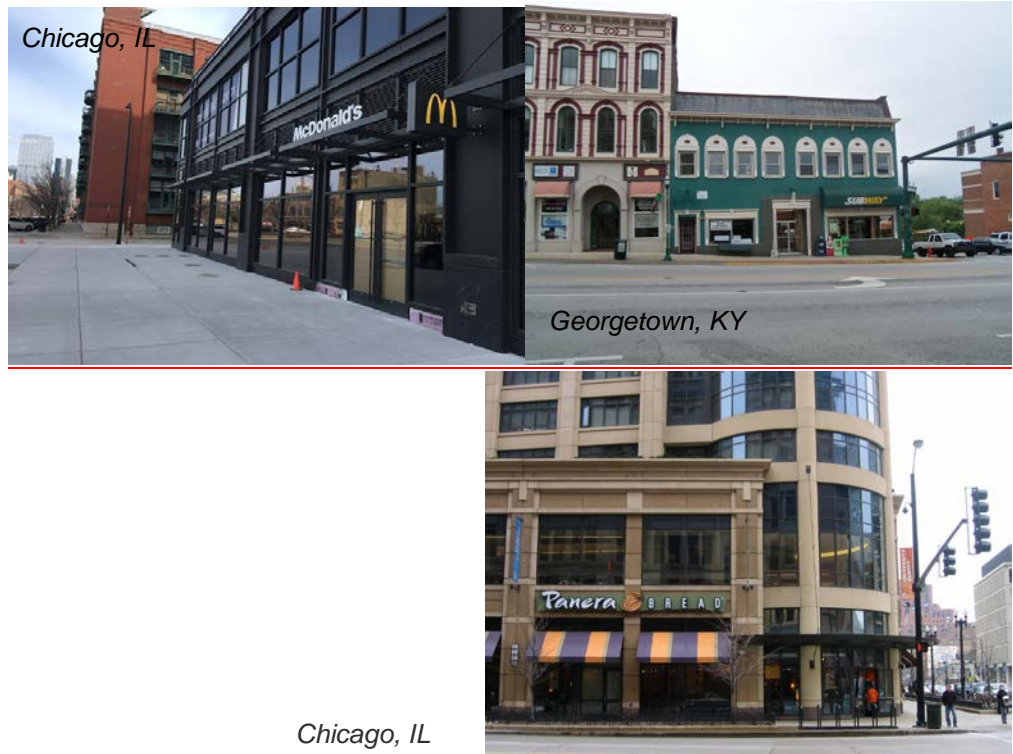

*Figure 1-102. Examples from other communities where a fast food franchise’s architecture was modified to fit into the context of the community.*

**1.2.4 Design all visible facades.** All facades of a building shall be given equal design consideration. Some flexibility may be given by the Director for alley or other facades that are not visible from streets, parks, parking lots, or other uses.

**1.2.5 Articulation.** Buildings in the Town Center Plan should include *modulation* and/or *articulation* features every 30-60 feet to reinforce Downtown's pattern of small storefronts. At least two of the following methods must be employed at intervals no greater than 30 feet:

- a) Use of window and/or entries that reinforce the pattern of 30-foot storefront spaces.
- b) Use of weather protection features that reinforce 30-foot storefronts. For example, for a business that occupies three lots, use three separate awnings to break down the scale of the storefronts. Alternating colors of the awnings may be useful as well.
- c) Change of roofline
- d) Change in building material or siding style
- e) Use of pillars every 30-40 feet.
- e) Other methods that meet the intent of the guidelines as approved by the Director and as recommended by the Design Commission.



Figure 1-113. Facade articulation examples at no more than 30-60 foot intervals.

**1.2.6 Massing for Multi-story buildings:** Buildings must use design techniques to break up long continuous building walls and reduce the architectural scale of the building, and add visual interest. Specifically, any building facade longer than 120 feet in width must employ design techniques to successfully limit the perceived length of individual facades. A combination of techniques will likely be required to meet the intent of the guidelines. Possible techniques include a combination of vertical building *modulation* or roofline *modulation* with a change in building materials or finishes, a clear change in building *articulation* and/or *fenestration* techniques. Changes in paint color alone will not be enough to meet the intent of the guidelines. For buildings incorporating residential uses on upper floors, this guideline is in addition to Guideline 3.6.1.





*Figure 1-14. This building uses a clear change in building materials and other articulation techniques to reduce the perceived scale of the building and add visual interest.*

**1.2.7 First story height.** In order to ensure the ground floor of structures have adequate height to function efficiently for potential commercial uses, the first story's height to finished ceiling of new infill buildings in the Town Center Plan must not be lower than 13 feet. No waiver or variance will be permitted in activity node areas.

**1.2.8 Vertical articulation**<sup>[EM5]</sup>. To moderate the vertical scale of multi-story buildings, the design shall include techniques to clearly define the building's top, middle and bottom. The following techniques are suggested methods of achieving vertical articulation:

- a) Top: Distinct cornice treatments.
- b) Middle: Upper level fenestration, material changes, and similar treatments that unify the building design.
- c) Bottom: Pedestrian-oriented storefronts, pedestrian-scale building details, and weather protection elements.
- d) Other methods that meet the intent of the guidelines as approved by the Director and as recommended by the Design Commission<sup>[EM6]</sup>.



*Figure 1-15. Multi-story buildings should employ vertical modulation.*

### 1.3 Building Details and Materials

When buildings are seen from a distance, the most noticeable qualities are the overall form and color. For example, a 100-foot wide, three-story commercial building must be observed at least 200 feet away in order for the building to fit within a person's cone of vision so its overall shape can be perceived. At that distance, the building's major features including windows and doors are clearly visible. However, at closer range (within 60 to 80 feet from the building - approximately the distance across a typical Downtown street), a person notices a building's individual elements and details much more than its overall form. From the adjacent sidewalk, the most important aspects of a building are its design details, texture of materials, quality of its finishes, and small, decorative elements. In Sumner's Downtown setting, it is essential that buildings and their contents be attractive up close.

#### Intent

- ◆ Encourage the incorporation of creative design details and small scale elements into building facades are attractive at a pedestrian scale and add visual interest.
- ◆ Encourage high quality building materials that will promote the character and identity of Sumner.
- ◆ Discourage the use of materials that are not compatible with the character of Sumner.
- ◆ Encourage the use of building colors compatible with the established historical character of Sumner.
- ◆ Mitigate the impacts of *blank walls* on the pedestrian environment.

#### Guidelines

##### 1.3.1 Building details.

**1.3.1.1 Non-residential.** All non-residential buildings shall be enhanced with appropriate details. All new buildings are required to employ at least one detail element from each of the three categories below. The applicant must demonstrate how the amount, type, and mix of details meet the intent of the guidelines. For example, a large building with multiple storefronts will likely need more than one decorative sign, one transom window, and one decorative kick-plate to meet the intent of the guidelines.

##### a) Window and/or entry treatment

- i) Display windows divided into a grid of multiple panes
- ii) Transom windows
- iii) Roll-up windows/doors
- iv) Other distinctive window treatment that meets the intent of the guidelines.
- v) Recessed entry
- vi) Decorative door
- vii) Arcade



## Town Center Plan Guidelines

- viii) Landscaped trellises or other decorative element that incorporates landscaping near the building entry
- ix) Other decorative entry treatment that meets the intent of the guidelines.

### b) Decorative facade attachments

- i) Decorative weather protections element such as a steel canopy, decorative cloth awning, or retractable awning.
- ii) Decorative, custom hanging sign(s).
- iii) Decorative building-mounted light fixtures.

### c) Building materials and other facade elements

- i) Decorative building materials/use of building materials. Examples include decorative use of brick, tile, or stonework.
- ii) Decorative artwork on building (such as a mural) or bas-relief sculpture.
- iii) Decorative kick-plate, pier, beltcourse, design.
- iv) Other details that meet the intent of the guidelines as determined by the Director and as recommended by the Design Commission.

Other mixtures of detailed elements will be considered provided they meet the intent of the guidelines.

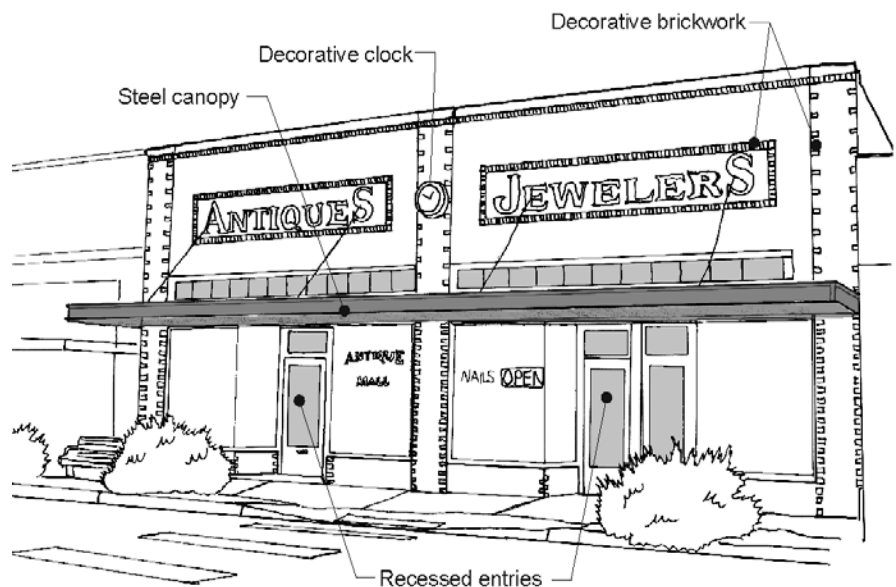


Figure 1-16. This older Downtown building would meet the current standards by including transom windows, a recessed entry, a steel canopy, a decorative clock, and decorative brickwork.

## Town Center Plan Guidelines



*Figure 1-17. Other Downtown elements that would qualify as a building details: A = decorative clock and lights and transom windows; B = decorative columns; C = decorative entry, windows, and roofline element; D = recessed entry and decorative kickplates; and E = decorative pedestrian-oriented signage.*

**1.2.1.2 Residential.** All residential buildings shall be enhanced with appropriate details. All new buildings are required to employ at least one detail element from each of the three categories below. The applicant must demonstrate how the amount, type, and mix of details meet the intent of the guidelines.

**a) Window treatment**

- i) Windows must be treated with trim at least 3 inches wide.
- ii) Landscape treatments below the window ceil.
- iii) Romeo and Juliet balcony at least 6 inches deep and as wide as the window.
- iv) Other distinctive window treatment that meets the intent of the guidelines.

**b) Entry treatment**

- i) Recessed entry
- ii) Decorative door
- iii) Arcade

- iv) Landscaped trellises or other decorative element that incorporates landscaping near the building entry
- v) Other decorative entry treatment that meets the intent of the guidelines.

Other mixtures of detailed elements will be considered provided they meet the intent of the guidelines.

### **1.3.2 Blank walls.**

- a) A wall (including building facades and retaining walls) is considered a *blank wall* if:
  - i) A ground floor wall or portion of a ground floor wall over 6 feet in height that has a horizontal length greater than 15 feet and does not include a transparent window or door; or
  - ii) Any portion of a ground floor wall having a surface area of 400 square feet or greater that does not include a transparent window or door.
- b) Untreated *Blank walls* facing a public street, *pedestrian-oriented space*, or pedestrian pathway are prohibited. Any new *blank walls* shall be treated through one or more of the methods below sufficient to meet the intent of the guidelines. For large walls, for example, a combination of treatments may be needed to break up the façade and provide visual interest. Owners of existing buildings containing visible *blank walls* are encouraged to utilize one or more of the following treatments to add visual interest to the street. Methods to treat *blank walls* can include:
  - i) Display windows.
  - ii) Landscape planting bed at least 5 feet wide or a raised planter bed at least 2 feet high and 3 feet wide in front of the wall with planting materials that are sufficient to obscure or screen at least 35 percent of the wall's surface within three years.
  - iii) Installing a vertical trellis in front of the wall with climbing vines or plant materials.
  - iv) Artwork (mosaic, mural, sculpture, relief, etc.) over at least 50 percent of the *blank wall* surface.
  - v) Other methods that meet the intent as determined by the Director and as recommended by the Design Commission.

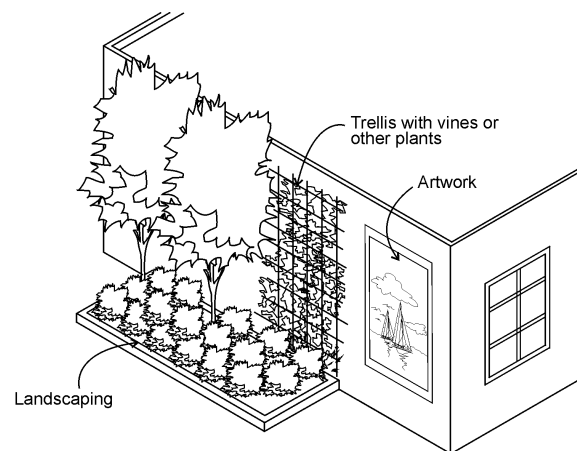


Figure 1-18. Examples of blank wall treatments.

**1.3.3 Fire wall treatments:** Exposed firewalls alongside property lines visible from a street or parking area must utilize material, color, and/or textural changes as approved by the City to add visual interest to the wall.

**1.3.4 Secondary entrance design elements.** All commercial uses containing a secondary side or rear customer entrance shall incorporate at least two of the following design elements to visually enhance such entries:

- a) Weather protection over the entry at least 3 feet wide in the form of awnings, marquees, canopies, or overhangs.
- b) Decorative pedestrian-oriented signage consistent with SMC 18.44 that highlights the entry and adds visual interest.
- c) Pedestrian-oriented space or designated outdoor eating areas.
- d) Fixed landscaping elements, including one of the following:
  - i) Landscaped planter or fixed planter box incorporating decorative groundcover, shrubs, and/or trees.
  - ii) A trellis or other similar architectural element that incorporates landscaping.
- e) Decorative pedestrian-scaled lighting fixture(s).
- f) Special building details that highlight the entry and add visual interest.
- g) Other features that meet the intent of the guidelines as determined by the Director and as recommended by the Design Commission.



*Figure 1-19. Provide design elements and amenities for secondary public building entries, particularly where there is substantial public parking off the alley.*

**1.3.5 Preferred exterior building materials.** Building exteriors shall be constructed from high quality, durable materials. In the Historic District brick is the preferred exterior building material. Other building materials may be acceptable provided they meet all other guidelines herein. All other districts shall use durable materials that meet the intent of this section.



*Figure 1-19. Brick is the preferred exterior material for the Historic District buildings.*

**1.3.6 Prohibited materials.** The following materials are prohibited in visible locations unless an exception is granted by the Director based on the successful integration of the material into the overall design of the structure.

- a) Vinyl or plywood siding (including T-111 or similar plywood).
- b) Highly tinted or mirrored glass (except stained glass), except when used as an accent design element covering less than 10 percent of the building facade.
- c) Corrugated fiberglass.
- d) Chain link fencing (except for temporary purposes such as a construction site or as a gate for a refuse enclosure). See SMC 18.16.080(m) for restrictions for temporary uses.
- e) Crushed colored rock/crushed tumbled glass.
- f) Non-corrugated and highly reflective sheet metal<sup>EM81</sup>.

**1.3.7 Special material standards:**

- a) Concrete block. Special standards for concrete or concrete blocks (concrete masonry units or “cinder blocks”): When used for walls that are visible from a street, public park or open space, or pedestrian route, concrete or concrete block construction shall be architecturally treated in one or more of following ways:
  - i) Use a combination of textured surfaces such as split face or grooved to create distinctive patterns that add visual interest.



## Town Center Plan Guidelines



*Figure 1-120. When concrete block is used on a facade, the design should utilize a combination of textured surfaces and color.*

- ii) Use of other masonry types such as brick, glass block, or tile in conjunction with concrete or concrete blocks.
- iii) Use of decorative coursing to break up *blank wall* areas.
- iv) Use matching colored mortar where color is an element of architectural treatment for any of the options above.



*Figure 1-131. An example of concrete block used in conjunction with other materials[EM9].*

- b) Metal siding. When used for walls that are visible from a street, public park or open space, or pedestrian route, buildings shall have visible corner moldings and trim and incorporate masonry, stone, or other durable permanent material within 2 feet of the ground level. Facades wider than 40 feet that employ metal siding shall incorporate multiple colors or other siding materials.

## Town Center Plan Guidelines



*Figure 1-22. This building features metal siding with visible corner trim and concrete block closer to the ground level.*



*Figure 1-23. This facade combines stucco with concrete block and other accent materials.*

**1.3.8 Year of construction.** The year of construction of a building shall be noted by the installation of a permanent cast metal plaque attached to the building. Stone or masonry set integral with other masonry on the front building elevation facing the principal street may be used in lieu of a cast metal plaque. The year of construction is to be noted by numbers not less than six inches high. Other information associated with the building that may have historic interest in the future may be included.

**1.3.9 Color Palette.** In the Historic District a storefront's palette should be no more than three colors; one base color, one trim color, and one accent color. Encourage trim and accent colors that contrast with the base color. Specifically, darker base colors with white trim work particularly well. However, lighter base colors can effectively be combined with dark trim colors. Applicants should consult with Sumner's Downtown Association on appropriate façade colors.



## Town Center Plan Guidelines



*Figure 1-24. Dark base colors with contrasting white trim.*



*Figure 1-25. This storefront uses a lighter base color with darker trim and a contrasting red door.*

### 1.4 Streetscape and Landscaping

#### Intent

- ◆ Enhance the small town character of Downtown Sumner.
- ◆ Improve the pedestrian environment by making it easier, safer and more comfortable to walk throughout the Town Center.
- ◆ Provide signs which are pedestrian in scale and located so as to be legible to pedestrians on the sidewalks.
- ◆ Reduce conflicts between pedestrians and automobiles.
- ◆ Support the **Urban Design Concept Plan** <sup>[EM11]</sup> for the City of Sumner public improvements.

#### Guidelines

##### 1.4.1 Sidewalk widths and uses.

- a) New buildings intended for ground floor restaurant or other similar uses that may desire outdoor dining or seating opportunities are encouraged to setback storefronts to provide for wider sidewalks. For example, 12-foot sidewalks allow for very limited outdoor dining/sitting opportunities, while 15-foot sidewalks provide a more desirable configuration for outdoor dining. Also see SMC 12.28.100 and 18.16.080(O) for related standards.



*Figure 1-26. Wider sidewalks provide opportunities for a greater range of pedestrian activities.*

- b) Sidewalks shall not be enclosed as building space for retailing. Outdoor dining and small, temporary displays for items such as groceries, hardware, books, etc. may be allowed provided they do not impede pedestrians passing comfortably on the sidewalk. Also see SMC 12.28.080 for related provisions.

- 1.4.2 Streetscape amenities** <sup>[EM12]</sup>. Pedestrian amenities must be included along all downtown streets. Specifically, at least one amenity listed below must be included for each 60 lineal feet (on average) of street frontage. The type, location, and design of chosen amenities must contribute to a well-balanced mix of features on the street, as determined by the

## Town Center Plan Guidelines

Director. Developments with greater than 120 linear feet of frontage shall include at least one amenity from Category II below. Desired amenities include:

### Category I:

- a) Pedestrian furniture, such as seating space, approved trash receptacles, and consolidated newspaper racks (each piece of furniture may count as an amenity element). The design of such furniture should be compatible, durable, and located to minimize impacts to pedestrian movement on the sidewalk. Seating areas and trash receptacles are particularly important where there is expected to be a concentration of pedestrian activity (such as near major building entrances and transit stops) and may be required by the Director. Low walls or planter edges to be used for seating should be at least 12 inches wide to function successfully. Seating can be incorporated into parking lot screening walls, building foundations or be free-standing planters or benches.
- b) Planting beds and/or other permanent planting elements;
- c) Decorative pavement patterns and tree grates;



*Figures 1-27. Examples of Category I streetscape pedestrian amenities.*

### Category II:

- a) Drinking fountain.
- b) Ground-mounted Pedestrian-scaled lighting (placed between 12 feet and 14 feet above the ground) as approved by the Director.
- c) Informational kiosks.
- d) Transit shelters.



e) Decorative clocks.

f) Artwork such as sculptures, installations, or other artwork incorporated into sidewalk.

Features above that are publicly funded, already required by code, and/or obstruct pedestrian movement (at least 8 feet of unobstructed horizontal clearance is required on all sidewalks) will not qualify as an amenity to meet this guideline.



*Figures 1-28. Examples of Category II streetscape pedestrian amenities.*

**1.4.3 Site Lighting.** Provide adequate lighting levels in all areas used by pedestrians or automobiles, including building entries, walkways, parking areas, circulation areas, and other open space areas.

New developments shall provide site lighting that meets the following design criteria through implementing measures such as:

- a) All public areas shall be lit with average minimum and maximum levels as follows:
  - i) Minimum (for low or non-pedestrian and vehicular traffic areas) of 0.5 foot candles;
  - ii) Moderate (for moderate or high volume pedestrian areas) of 1-2 foot candles; and
  - iii) Maximum (for high volume pedestrian areas and building entries) of 4 foot candles.
- b) Lighting shall be provided at consistent levels, with gradual transitions between maximum and minimum levels of lighting and between lit areas and unlit areas. Highly contrasting pools of light and dark areas shall be avoided.
- c) Parking lot lighting fixtures shall be non-glare and mounted no more than 25 feet above the ground, with lower fixtures preferable so as to maintain a human scale. Requests for higher lighting fixtures may be considered with the approval of the Director. All fixtures over 12 feet in height shall be fitted with a full cut-off shield, except for catenary lights.

## Town Center Plan Guidelines

- d) Pedestrian-scaled lighting (light fixtures no taller than 14 feet) is encouraged in areas of pedestrian activity. Lighting shall enable pedestrians to identify a face 45 feet away in order to promote safety.
- e) Lighting should not be permitted to trespass onto adjacent private parcels nor shall light source (luminaire) be visible at the property line. All building lights shall be directed onto the building itself and/or the ground immediately adjacent to it. The light emissions should not be visible above the roofline of the building. Light fixtures other than traditional cobra heads are encouraged.

### 1.4.4 Landscaping. Developments in the Town Center Plan incorporating landscaped areas are subject to SMC Chapter 18.41 requirements with the following exceptions/provisions:

- a) Properties adjacent to Main Street are exempt from the requirements of SMC 18.41.040.
- b) Green roofs are encouraged to be used to provide pee patches and open space areas for residents. Such roofs shall have a substrate depth of at least 4 inches designed to accommodate a variety of hardy, drought-resistant plant species.



*Figures 1-29. Green roof example.*

- c) Permeable pavements may count for up to 30 percent of the required landscaped areas based on the level of permeability and long term maintenance capabilities as determined by the Director.

---

## Contents

<u>1. Central Business District Guidelines.....</u>	<u>1</u>
---	----------

~~1.1 Site Design and Parking .....2~~  
~~1.2 Building Character and Massing ..... 11~~  
~~1.3 Building Details and Materials ..... 15~~  
~~1.4 Streetscape, Landscaping, and Signage.....23~~

## **Introduction**

~~As described in the Sumner Comprehensive Plan, the Downtown area provides a focal point for the City, providing major retail and commercial services. The area also maintains a special cultural status as the historical center of the City as well as serving as a community center for the surrounding region. Developed in the early 1900s, the Downtown maintains a variety of small scaled retail and commercial structures and residential uses. It is intended that this area maintain and improve its pedestrian-oriented character, as well as enhance the existing small and medium-sized, independent business fabric. It is not intended that Downtown have a particular theme, but that it maintain its fairly fine-grained signage, building materials, and detailing. Preservation and rehabilitation of Downtown’s historic structures are encouraged to reinforce Sumner’s distinctive character. Reference Zoning ordinance section 18.16.~~

## **Applicability**

~~These guidelines apply to all new development and re-development within the CBD Zone (see SMC 18.40.020). For mixed-use buildings featuring residential uses, the residential portion of the building/site shall comply with the Multifamily Design Guidelines addressing open space and building design.~~

## **Relationship to Sumner Municipal Code (SMC)**

~~These guidelines shall serve as a supplement the standards of SMC. Where there is a conflict between the guidelines herein and the standards in SMC, these guidelines shall apply as they are more specific in nature.~~

## 1.1 Site Design and Parking

### Intent

- ◆ ~~To create streets which are safe and attractive to pedestrians.~~
- ◆ ~~To provide activity and interest along the street.~~
- ◆ ~~To create a sense of enclosure by encouraging development to orient toward the street.~~
- ◆ ~~To reduce the visual impact of parking lots and *blank walls* located adjacent to the street.~~
- ◆ ~~To encourage developments to integrate small *pedestrian-oriented spaces* into projects.~~

### Guidelines


~~1.1.1 Building location—properties north of Maple Street.~~ Buildings must be located adjacent to the sidewalk and feature *pedestrian-oriented facades*. This includes:

- a) ~~Primary building entry on this facade.~~
- b) ~~Transparent windows and doors covering at least 75 percent of the facade between 2 and 8 feet above the ground.~~

~~Exceptions:~~

- ~~—i) Buildings may be set back from the sidewalk provided the space between the sidewalk and the building meets the definition of a *pedestrian-oriented space*.~~
- ~~—ii) For street corner buildings, the Director will consider reducing the transparency requirement to 50 percent of the ground floor facade between 2 and 8 feet above the sidewalk provided the facade incorporates sufficient design details that provide visual interest at a pedestrian scale. Facades along Main Street shall not qualify for this exception.~~
- c) ~~Pedestrian weather protection at least 5 feet wide along at least 75 percent of the building's front face. Wider weather protection features are encouraged to provide for outdoor seating areas. The weather protection may be in the form of awnings, marquees, canopies, arcades, or building overhangs. Gaps in the covering allow for visual variety in the facade through the use of architectural features and/or landscaping components.~~



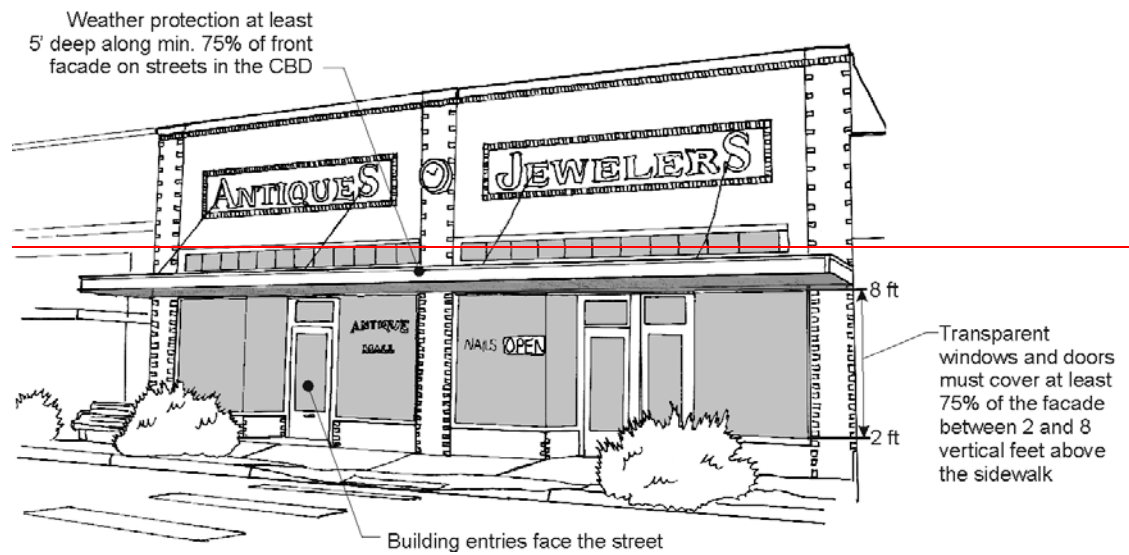

*Figure 1-1. Standards for pedestrian-oriented facades.*




*Figure 1-2. Examples of a pedestrian-oriented facades in Downtown Sumner.*

### **1.1.2 Building location—properties south of Maple Street.** Developments have the following options:

- a) Locate the building adjacent to the sidewalk featuring a *pedestrian-oriented facade*.
- b) Locate the building within 5 to 10 feet of the sidewalk provided:
  - i) The area between the building features *pedestrian-oriented space* or landscaping including a combination of groundcover and shrubs and/or trees. For proposals choosing the landscaping option, the applicant shall successfully demonstrate how the planting plan provides for seasonal interest and maintains visibility between the storefront and the street (for example, trees and tall shrubs should not be planted where they will block views from ground floor windows).
  - ii) The building must include transparency along at least 50 percent of the ground floor facade between 4 and 8 feet above the sidewalk.
  - iii) The primary building entrance must face the street.
  - iv) Weather protection at least 5 feet deep is required over the entry. Such elements can project into front setback areas.

Greater building setbacks from the sidewalk may be allowed as approved by the Director provided the space between the sidewalk and the building meets the definition of *pedestrian-oriented space* and the building features a *pedestrian-oriented facade*.

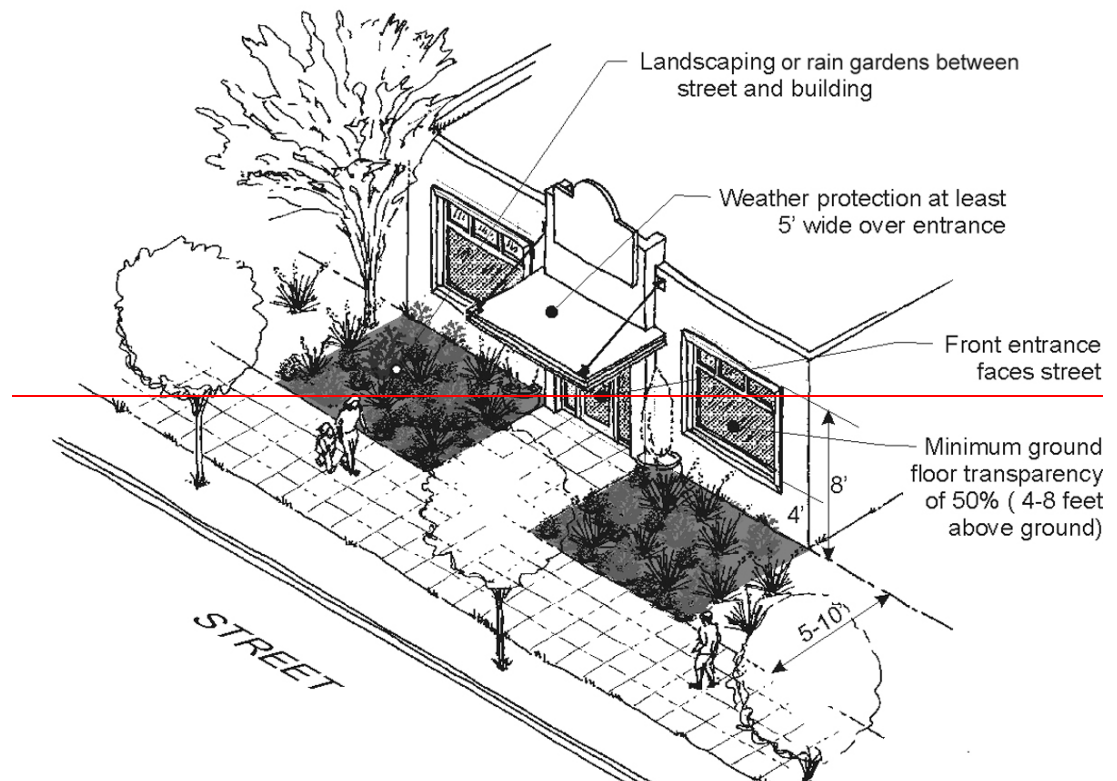


*Figure 1-3. Example of landscaping in front of a building permitted for CBD properties south of Maple Street.*



*Figure 1-4. Front yard landscaping example.*

### **1.1.3—Parking location and design:**

- a) ~~Main Street: New surface parking lots or ground floor structured parking fronting Main Street are prohibited.~~
- b) ~~All other streets: Parking shall be located behind or under structures and away from streets. Where at least some street front surface or structured parking and vehicular access is unavoidable, as determined by the Director, no more than 65 feet of the street frontage may be occupied by parking and vehicle access. Such parking lots shall be screened from the sidewalk by one of the following methods:~~
  - ~~i) Provide a 5-foot wide planting bed that incorporates a continuous low wall (approximately 3 feet tall). The planting bed shall be in front of the wall and feature *Landscaping Type C*. Alternative landscaping schemes will be considered by the Director provided they meet the intent of the guidelines. The wall shall be constructed of brick, stone, decorative concrete or concrete block, or other permanent material that provides visual interest and helps to define the street edge as determined by the Director. See Figure 1-5 for an example.~~

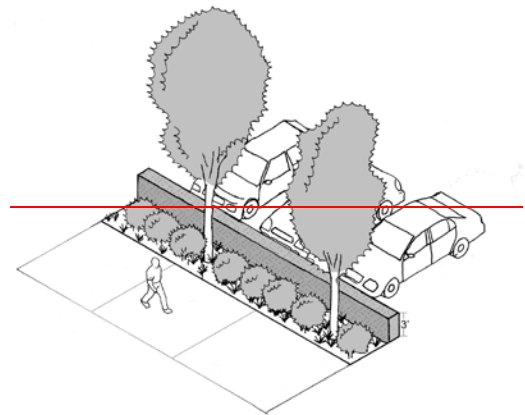


*Figure 1-5. Parking lot planting buffer with low wall.*

- ~~ii) Provide an elevated planter which is a minimum of 5 feet wide and between 2 and 3 feet in height. Ledges that are approximately 12 inches in width are encouraged as they can double as a seating area. The planter must be constructed of masonry, concrete or other permanent material that effectively contrasts with the color of the sidewalk and combines groundcover and annuals, perennials, ornamental grasses, low~~


## Town Center Plan Guidelines

shrubs, and/or small trees that provide seasonal interest as determined by the Director. See Figure 1-6 as an example.

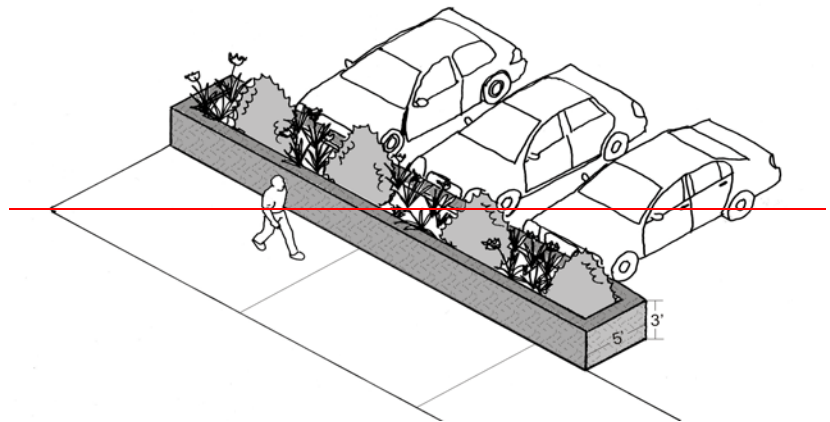

*Figure 1-66. Elevated parking lot planting buffer.*

Both options (i) and (ii) should choose and maintain plantings to maintain eye level visibility between the street/sidewalk and parking area for safety. This means that shrubs and other low plantings should be maintained below 3 feet in height while trees (once they achieve taller heights) should generally be trimmed to up to the 8-foot level. See Figure 1-7.

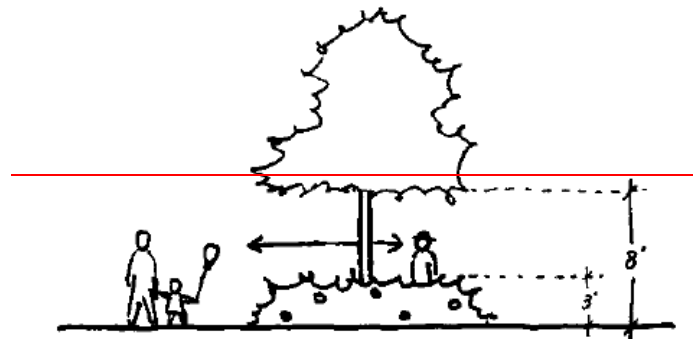

*Figure 1-7. Parking lot planting buffers shall emphasize the 3:8 rule for visibility and safety.*

- e) Surface or structured parking lots may not be located adjacent to street corners, but the Director may make exceptions for any street, except for Main Street, provided the development includes a special corner treatment that mitigates negative visual impacts of a parking lot, including applicable sight distance requirements, and adds character and identity to Downtown. Examples could include:
- i) Install distinctive landscaping (covering an area at least 20 feet by 20 feet or 400 SF) with a combination of groundcover and shrubs or trees. Such landscaping should be designed to provide special interest in all four seasons.
  - ii) Include a special architectural element, such as a trellis, to add identity or demarcation of the area.


Such landscaping or architectural element may have a sign incorporated into it (as long as such sign does not identify an individual business or businesses).

## Town Center Plan Guidelines

~~1.1.4 Vehicular access and curb cuts.~~ New driveways onto any street are prohibited. Access to all other off-street parking areas shall be from existing alleys.

~~Exception: New driveways accessing parking lots approved per Guideline 1.1.3 may be permitted by the Director where it is determined that such a driveway will not adversely impact the pedestrian environment~~

~~1.1.5 Street corner sites.~~ All buildings located at the intersection of streets are encouraged to include design elements that accentuate their street corner location. Consider orienting the primary entrance to the corner. Cropped or notched building corners that provide for small *pedestrian-oriented spaces* adjacent to the street corner are encouraged.

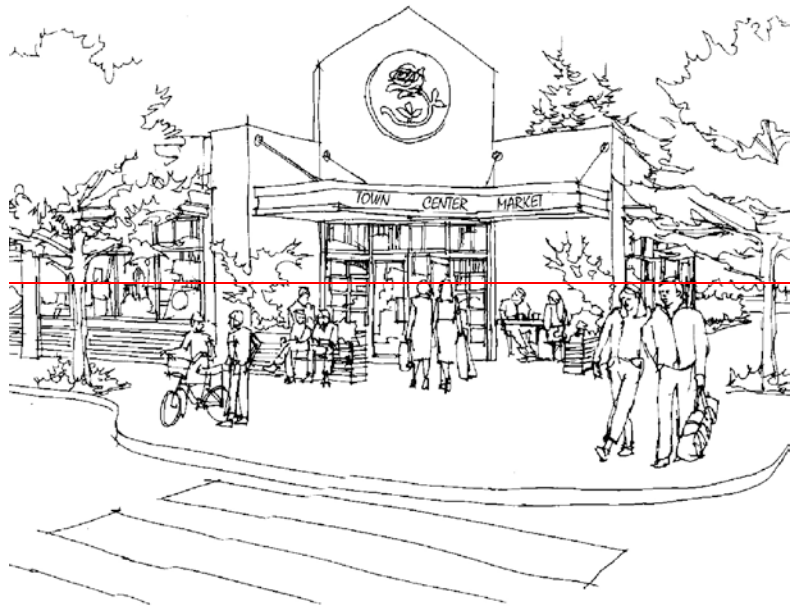

*Figure 1-8. Street corner development example.*

~~1.1.6 Open space.~~ Commercial developments in the CBD are not required to incorporate open spaces into the design of the site, but *pedestrian-oriented space* is encouraged to provide for gathering spaces Downtown. Desirable locations for *pedestrian-oriented space* are:

- ~~a) Between the sidewalk and the building entrance.~~
- ~~b) Adjacent to the street corner.~~
- ~~c) Adjacent to a building's secondary entrance (off the alley).~~
- ~~d) On rooftops as a patio or garden.~~





*Figure 1-7. Examples of pedestrian-oriented spaces located adjacent to sidewalks.*

### **1.1.7—Pedestrian-oriented space guidelines:**

- a) ~~To qualify as a pedestrian-oriented space, an area must have all of the following:~~
  - ~~—i) Pedestrian access to the abutting structures from the street, private drive, or a non-vehicular courtyard.~~
  - ~~—ii) Paved walking surfaces of either concrete or approved unit paving.~~
  - ~~—iii) Pedestrian-scaled lighting (no more than 14 feet in height) at a level averaging at least 2 foot candles throughout the space. Lighting may be on-site or building-mounted lighting.~~
  - ~~—iv) At least 3 feet of seating area (bench, ledge, etc.) or one individual seat per 60 square feet of plaza area or open space.~~
  - ~~—v) Spaces must be positioned in areas with significant pedestrian traffic to provide interest and security—such as adjacent to a building entry.~~
  - ~~—vi) Landscaping components that add seasonal interest to the space.~~
- b) ~~The following features are encouraged in pedestrian-oriented space:~~
  - ~~—i) Pedestrian amenities such as a water feature, drinking fountain, and/or distinctive paving or artwork.~~
  - ~~—ii) Provide pedestrian-oriented facades on some or all buildings facing the space.~~
  - ~~—iii) Consideration of the sun angle at noon and the wind pattern in the design of the space.~~
  - ~~—iv) Transitional zones along building edges to allow for outdoor eating areas and a planted buffer.~~
  - ~~—v) Movable seating.~~
- c) ~~The following features are prohibited within pedestrian-oriented space:~~
  - ~~—i) Asphalt or gravel pavement.~~
  - ~~—ii) Adjacent unscreened parking lots.~~
  - ~~—iii) Adjacent chain link fences.~~
  - ~~—iv) Adjacent blank walls.~~
  - ~~—v) Adjacent dumpsters or service areas.~~

- ~~–vi) Outdoor storage or retail sales that do not contribute to the pedestrian environment. An example is stacked bags of potting soil or compost, which are common in front of grocery stores during the spring and summer. The area used for such purposes will not be counted as *pedestrian-oriented space*.~~

### **~~1.1.8 Service and utility elements guidelines:~~**

- ~~a) Dumpsters, refuse and recycling containers, loading, mechanical areas, utility meters, electrical conduit, and other service/utility elements shall be located in alleys where available. Where alleys are not available or alternative location is necessary, service elements shall be located and designed to minimize the impacts on the streetscape and customer parking areas. Solid waste receptacles visible from the street, customer parking areas, and residential units shall be surrounded on at least three sides by a site obscuring fence or wall. Chain link fencing with slats may be used for gates but not for the enclosure. Landscaping elements surrounding such screen walls are encouraged.~~
- ~~b) All rooftop mechanical equipment shall be organized, proportioned, detailed, landscaped (with decks or terraces) and colored to be an integral element of the building.~~
- ~~c) Exterior hose bibs must be located as to not interfere with access to entryways.~~
- ~~d) No large outside item display areas are permitted (e.g. kitchen appliances or other similarly large merchandise that is visible from the street).~~
- ~~e) Exterior mechanical devices shall conform to SMC 18.16.080(A) concerning noise impacts.~~
- ~~f) Dumpster, refuse, and recycling containers shall be well maintained. Doorways shall be closed when not being serviced.~~



~~Figure 1-9. Avoid exposed utility meters along the sidewalk, like this.~~



### 1.2 Building Character and Massing

#### Intent

- ◆ Preserve historic details in buildings which typify Downtown Sumner's small town character.
- ◆ Encourage preservation, rehabilitation, restoration, or reconstruction of historical properties based on appropriate historic information, materials, and methods.
- ◆ Reduce the bulk and mass of buildings compatible with Sumner's small sense of scale.
- ◆ Preserve Sumner's traditional, compact, pedestrian-scaled network.
- ◆ Maintain compact rhythm of storefronts.
- ◆ Avoid a generic appearance and chain or franchise architecture that is trademarked, branded, or easily identified with a particular national or regional chain or commercial franchise.

#### Guidelines

**1.2.1 Historic building guidelines and standards.** Property owners of early 20<sup>th</sup>-century buildings are encouraged to use the "Secretary of Interior's Standards for the Treatment of Historic Properties" (web: <http://www.cr.nps.gov/hps/tps/standards/>) (hard copy also available at City Hall) as a guide to preserve, rehabilitate, restore, or reconstruct historic properties. These standards provide detailed recommendations on restoration, maintenance, repair, replacement, design, alterations, building materials, roofs, interiors, etc.

The restoration of older buildings to their original condition is encouraged. Historic photographs are extremely useful in determining historic precedent and should be used by owners interested in improving their historic properties. Renovations shall not cover or hide original windows or details with siding, paneling or signage.

If historic facade elements are missing, use a simplified interpretation of similar nearby historic facades. Do not replace facade elements with new interpretations unless evidence of the original is missing. New designs should continue the character of the original.



*Figure 1-80. Historical photographs are extremely useful in determining historic precedent. Building owners are thus strongly encouraged to consult historic images of their building prior to making any facade changes. This 1930 image looks west down Main Street.*

**1.2.2 Non-period architecture.** Existing architecture which is not consistent with the early 1900 style and represents later periods is also encouraged to celebrate distinctive design features, except where such features conflict with other standards and guidelines herein, as determined by the Director. Renovations of these structures should facilitate pedestrian access. Unique signage and design elements which are not inconsistent with the remainder of the guidelines are to be encouraged.

## Town Center Plan Guidelines

**1.2.3 ~~No franchise and corporate architecture.~~** The use of stock building plans, typical corporate and/or franchise designs, “regional prototype alternatives,” or other designs which are easily identified with a particular chain or corporation are not allowed.



*~~Figure 1-91. Generic franchise and corporate architecture is not allowed in the CBD.~~*



Lone Pine, CA



Jasper, Alberta



Gig Harbor



Sumner

## Town Center Plan Guidelines

~~Figure 1-102. Examples from other communities where a fast food franchise's architecture was modified to fit into the context of the community.~~

~~**1.2.4 Design all visible facades.** All facades of a building shall be given equal design consideration. Some flexibility may be given by the Director for alley or other facades that are not visible from streets, parks, parking lots, or other uses.~~

**1.2.5 Articulation.** Buildings in the CBD should include *modulation* and/or *articulation* features every 30 feet to reinforce Downtown's pattern of small storefronts. At least two of the following methods must be employed at intervals no greater than 30 feet:

- a) Use of window and/or entries that reinforce the pattern of 30-foot storefront spaces.
- b) Use of weather protection features that reinforce 30-foot storefronts. For example, for a business that occupies three lots, use three separate awnings to break down the scale of the storefronts. Alternating colors of the awnings may be useful as well.
- c) Change of roofline
- d) Change in building material or siding style
- e) Other methods that meet the intent of the guidelines as approved by the Director and as recommended by the Design Commission.



Figure 1-113. Facade articulation examples at no more than 30-foot intervals.

**1.2.6 Massing for Multi-story buildings:** Buildings must use design techniques to break up long continuous building walls and reduce the architectural scale of the building, and add visual interest. Specifically, any building facade longer than 120 feet in width must employ design techniques to successfully limit the perceived length of individual facades. A combination of techniques will likely be required to meet the intent of the guidelines. Possible techniques include a combination of vertical building *modulation* or roofline *modulation* with a change in building materials or finishes, a clear change in building *articulation* and/or *fenestration* techniques. Changes in paint color alone will not be enough to meet the intent of the guidelines. For buildings incorporating residential uses on upper floors, this guideline is in addition to Guideline 3.6.1.





*Figure 1-14. This building uses a clear change in building materials and other articulation techniques to reduce the perceived scale of the building and add visual interest.*

**1.2.7 First story height.** In order to ensure the ground floor of structures have adequate height to function efficiently for retail uses, the first story's height to finished ceiling of new infill buildings in the CBD must not be lower than 13 feet.

**1.2.8 Vertical articulation.** To moderate the vertical scale of multi-story buildings, the design shall include techniques to clearly define the building's top, middle and bottom. The following techniques are suggested methods of achieving vertical articulation:

- a) Top: Distinct cornice treatments.
- b) Middle: Upper level fenestration, material changes, and similar treatments that unify the building design.
- c) Bottom: Pedestrian-oriented storefronts, pedestrian-scale building details, and weather protection elements.

## Town Center Plan Guidelines



*Figure 1-15. Multi-story buildings should employ vertical modulation.*



### 1.3 Building Details and Materials

When buildings are seen from a distance, the most noticeable qualities are the overall form and color. For example, a 100-foot wide, three-story commercial building must be observed at least 200 feet away in order for the building to fit within a person's cone of vision so its overall shape can be perceived. At that distance, the building's major features including windows and doors are clearly visible. However, at closer range (within 60 to 80 feet from the building—approximately the distance across a typical Downtown street), a person notices a building's individual elements and details much more than its overall form. From the adjacent sidewalk, the most important aspects of a building are its design details, texture of materials, quality of its finishes, and small, decorative elements. In Sumner's Downtown setting, it is essential that buildings and their contents be attractive up close.

#### Intent

- ◆ Encourage the incorporation of creative design details and small scale elements into building facades are attractive at a pedestrian scale and add visual interest.
- ◆ Encourage high quality building materials that will promote the character and identity of Sumner.
- ◆ Discourage the use of materials that are not compatible with the character of Sumner.
- ◆ Encourage the use of building colors compatible with the established historical character of Sumner.
- ◆ Mitigate the impacts of *blank walls* on the pedestrian environment.

#### Guidelines

**1.3.1 Building details.** All non-residential buildings shall be enhanced with appropriate details. All new buildings are required to employ at least one detail element from each of the three categories below. The applicant must demonstrate how the amount, type, and mix of details meet the intent of the guidelines. For example, a large building with multiple storefronts will likely need more than one decorative sign, one transom window, and one decorative kick plate to meet the intent of the guidelines.

a) Window and/or entry treatment

- i) Display windows divided into a grid of multiple panes
- ii) Transom windows
- iii) Roll-up windows/doors
- iv) Other distinctive window treatment that meets the intent of the guidelines.
- v) Recessed entry
- vi) Decorative door
- vii) Arcade
- viii) Landscaped trellises or other decorative element that incorporates landscaping near the building entry
- ix) Other decorative entry treatment that meets the intent of the guidelines.

## Town Center Plan Guidelines


### b) ~~Decorative facade attachments~~

- ~~— i) Decorative weather protections element such as a steel canopy, decorative cloth awning, or retractable awning.~~
- ~~— ii) Decorative, custom hanging sign(s).~~
- ~~— iii) Decorative building-mounted light fixtures.~~


### c) ~~Building materials and other facade elements~~

- ~~— i) Decorative building materials/use of building materials. Examples include decorative use of brick, tile, or stonework.~~
- ~~— ii) Decorative artwork on building (such as a mural) or bas-relief sculpture.~~
- ~~— iii) Decorative kick plate, pier, belteourse, design.~~
- ~~— iv) Other details that meet the intent of the guidelines as determined by the Director and as recommended by the Design Commission.~~

~~Other mixtures of detailed elements will be considered provided they meet the intent of the guidelines.~~

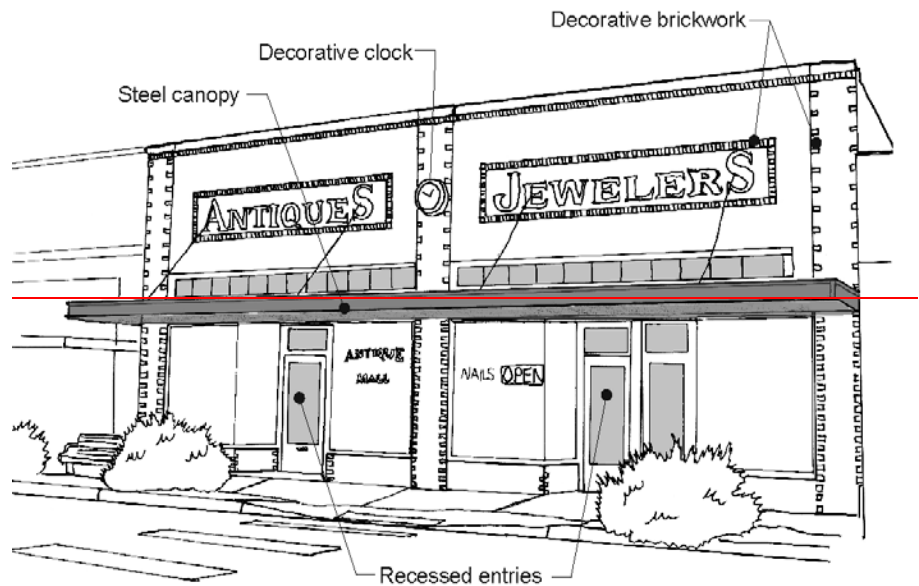

~~Figure 1-16. This older Downtown building would meet the current standards by including transom windows, a recessed entry, a steel canopy, a decorative clock, and decorative brickwork.~~

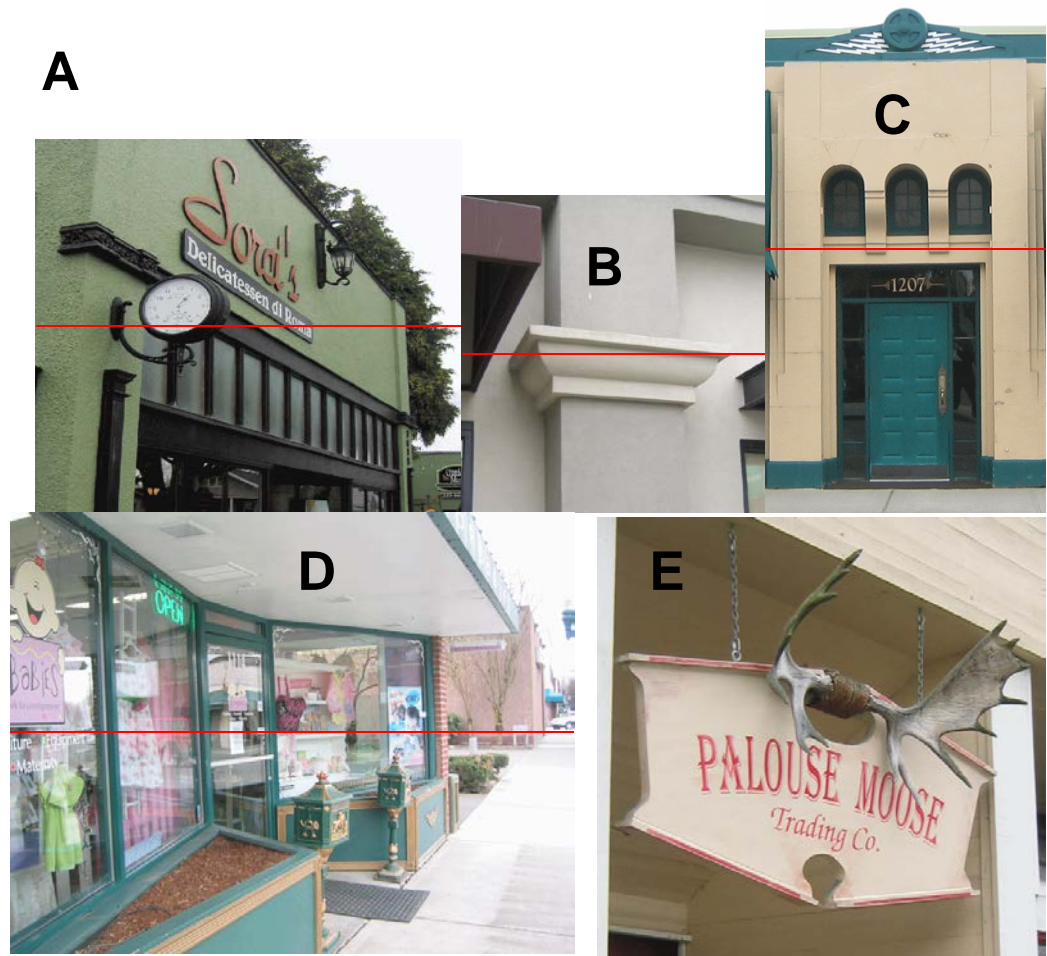


*Figure 1-17. Other Downtown elements that would qualify as a building details: A = decorative clock and lights and transom windows; B = decorative columns; C = decorative entry, windows, and roofline element; D = recessed entry and decorative kickplates; and E = decorative pedestrian-oriented signage.*

### **1.3.2 Blank walls.**

- a) A wall (including building facades and retaining walls) is considered a *blank wall* if:
  - i) A ground floor wall or portion of a ground floor wall over 6 feet in height that has a horizontal length greater than 15 feet and does not include a transparent window or door; or
  - ii) Any portion of a ground floor wall having a surface area of 400 square feet or greater that does not include a transparent window or door.
- b) Untreated *Blank walls* facing a public street, *pedestrian oriented space*, or pedestrian pathway are prohibited. Any new *blank walls* shall be treated through one or more of the methods below sufficient to meet the intent of the guidelines. For large walls, for example, a combination of treatments may be needed to break up the façade and provide visual interest. Owners of existing buildings containing visible *blank walls* are encouraged to utilize one or more of the following treatments to add visual interest to the street. Methods to treat *blank walls* can include:

## Town Center Plan Guidelines

- ~~—i)—Display windows.~~
- ~~—ii)—Landscape planting bed at least 5 feet wide or a raised planter bed at least 2 feet high and 3 feet wide in front of the wall with planting materials that are sufficient to obscure or screen at least 35 percent of the wall's surface within three years.~~
- ~~—iii)—Installing a vertical trellis in front of the wall with climbing vines or plant materials.~~
- ~~—iv)—Artwork (mosaic, mural, sculpture, relief, etc.) over at least 50 percent of the *blank* wall surface.~~
- ~~—v)—Other methods that meet the intent as determined by the Director and as recommended by the Design Commission.~~

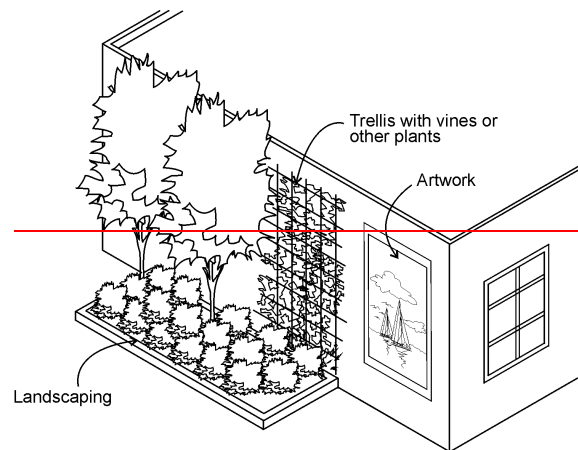

*Figure 1-18. Examples of blank wall treatments.*

**1.3.3 Fire wall treatments:** Exposed firewalls along side property lines visible from a street or parking area must utilize material, color, and/or textural changes as approved by the City to add visual interest to the wall.

**1.3.4 Secondary entrance design elements.** All commercial uses containing a secondary side or rear customer entrance shall incorporate at least two of the following design elements to visually enhance such entries:

- ~~a)—Weather protection over the entry at least 3 feet wide in the form of awnings, marquees, canopies, or overhangs.~~
- ~~b)—Decorative pedestrian-oriented signage consistent with SMC 18.44 that highlights the entry and adds visual interest.~~
- ~~c)—Pedestrian-oriented space or designated outdoor eating areas.~~
- ~~d)—Fixed landscaping elements, including one of the following:~~
  - ~~—i)—Landscaped planter or fixed planter box incorporating decorative groundcover, shrubs, and/or trees.~~
  - ~~—ii)—A trellis or other similar architectural element that incorporates landscaping.~~
- ~~e)—Decorative pedestrian-scaled lighting fixture(s).~~

## Town Center Plan Guidelines

- ~~f) Special building details that highlight the entry and add visual interest.~~
- ~~g) Other features that meet the intent of the guidelines as determined by the Director and as recommended by the Design Commission.~~



~~Figure 1-19. Provide design elements and amenities for secondary public building entries, particularly where there is substantial public parking off the alley.~~

~~**1.3.5 Preferred exterior building materials.** Building exteriors shall be constructed from high quality, durable materials. Brick is the preferred exterior building material. Other building materials may be acceptable provided they meet all other guidelines herein.~~



~~Figure 1-19. Brick is the preferred exterior material for Downtown buildings due to it's historic precedent.~~

~~**1.3.6 Prohibited materials.** The following materials are prohibited in visible locations unless an exception is granted by the Director based on the successful integration of the material into the overall design of the structure.~~

- ~~a) Vinyl or plywood siding (including T-111 or similar plywood).~~
- ~~b) Highly tinted or mirrored glass (except stained glass), except when used as an accent design element covering less than 10 percent of the building facade.~~



- ~~e) Corrugated fiberglass.~~
- ~~d) Chain link fencing (except for temporary purposes such as a construction site or as a gate for a refuse enclosure). See SMC 18.16.080(m) for restrictions for temporary uses.~~
- ~~e) Crushed colored rock/crushed tumbled glass.~~
- ~~f) Non-corrugated and highly reflective sheet metal.~~

### **~~1.3.7 Special material standards:~~**

- ~~a) Concrete block. Special standards for concrete or concrete blocks (concrete masonry units or “cinder blocks”): When used for walls that are visible from a street, public park or open space, or pedestrian route, concrete or concrete block construction shall be architecturally treated in one or more of following ways:
  - ~~—i) Use a combination of textured surfaces such as split face or grooved to create distinctive patterns that add visual interest.~~~~



~~Figure 1-120. When concrete block is used on a facade, the design should utilize a combination of textured surfaces and color.~~

- ~~—ii) Use of other masonry types such as brick, glass block, or tile in conjunction with concrete or concrete blocks.~~
- ~~—iii) Use of decorative coursing to break up blank wall areas.~~
- ~~—iv) Use matching colored mortar where color is an element of architectural treatment for any of the options above.~~

## Town Center Plan Guidelines



*Figure 1-131. An example of concrete block used in conjunction with other materials.*

- b) ~~Metal siding. When used for walls that are visible from a street, public park or open space, or pedestrian route, buildings shall have visible corner moldings and trim and incorporate masonry, stone, or other durable permanent material within 2 feet of the ground level. Facades wider than 40 feet that employ metal siding shall incorporate multiple colors or other siding materials.~~



*Figure 1-22. This building features metal siding with visible corner trim and concrete block closer to the ground level.*

- c) ~~Exterior Insulation and Finish System (EIFS) and other similar troweled finishes:~~
- ~~—i) Shall be no more than 30 percent of the facade area (exceptions will be considered by the Director for innovative design that meets the intent of the guidelines).~~
  - ~~—ii) Shall be trimmed in wood or masonry.~~
  - ~~—iii) Should be sheltered from extreme weather by roof overhangs or other methods.~~
  - ~~—iv) Shall incorporate masonry, stone, or other durable permanent material within 2 feet of the ground level.~~



## Town Center Plan Guidelines



*Figure 1-23. This facade combines stucco with concrete block and other accent materials.*

**1.3.8 Year of construction.** The year of construction of a building shall be noted by the installation of a permanent cast metal plaque attached to the building. Stone or masonry set integral with other masonry on the front building elevation facing the principal street may be used in lieu of a cast metal plaque. The year of construction is to be noted by numbers not less than six inches high. Other information associated with the building that may have historic interest in the future may be included.

**1.3.9 Color Palette.** A storefront's palette should be no more than three colors; one base color, one trim color, and one accent color. Encourage trim and accent colors that contrast with the base color. Specifically, darker base colors with white trim work particularly well. However, lighter base colors can effectively be combined with dark trim colors. Applicants should consult with Sumner's Downtown Association on appropriate façade colors.



*Figure 1-24. Dark base colors with contrasting white trim.*

## Town Center Plan Guidelines



*Figure 1-25. This storefront uses a lighter base color with darker trim and a contrasting red door.*

### 1.4 Streetscape and Landscaping

#### Intent

- ◆ Enhance the small town character of Downtown Sumner.
- ◆ Improve the pedestrian environment by making it easier, safer and more comfortable to walk throughout the CBD.
- ◆ Provide signs which are pedestrian in scale and located so as to be legible to pedestrians on the sidewalks.
- ◆ Reduce conflicts between pedestrians and automobiles.
- ◆ Support the Urban Design Concept Plan for the City of Sumner public improvements.

#### Guidelines

##### 1.4.1 Sidewalk widths and uses.

- a) New buildings intended for ground floor restaurant or other similar uses that may desire outdoor dining or seating opportunities are encouraged to setback storefronts to provide for wider sidewalks. For example, 12-foot sidewalks allow for very limited outdoor dining/sitting opportunities, while 15-foot sidewalks provide a more desirable configuration for outdoor dining. Also see SMC 12.28.100 and 18.16.080(O) for related standards.



*Figure 1-26. Wider sidewalks provide opportunities for a greater range of pedestrian activities.*

- b) Sidewalks shall not be enclosed as building space for retailing. Outdoor dining and small, temporary displays for items such as groceries, hardware, books, etc. may be allowed provided they do not impede pedestrians passing comfortably on the sidewalk. Also see SMC 12.28.080 for related provisions.

- ##### 1.4.2 Streetscape amenities.
- Pedestrian amenities must be included along all downtown streets. Specifically, at least one amenity listed below must be included for each 60 lineal feet (on average) of street frontage. The type, location, and design of chosen amenities must contribute to a well-balanced mix of features on the street, as determined by the

## Town Center Plan Guidelines

~~Director. Developments with greater than 120 linear feet of frontage shall include at least one amenity from Category II below. Desired amenities include:~~

### ~~Category I:~~

- ~~a) Pedestrian furniture, such as seating space, approved trash receptacles, and consolidated newspaper racks (each piece of furniture may count as an amenity element). The design of such furniture should be compatible, durable, and located to minimize impacts to pedestrian movement on the sidewalk. Seating areas and trash receptacles are particularly important where there is expected to be a concentration of pedestrian activity (such as near major building entrances and transit stops) and may be required by the Director. Low walls or planter edges to be used for seating should be at least 12 inches wide to function successfully. Seating can be incorporated into parking lot screening walls, building foundations or be free-standing planters or benches.~~
- ~~b) Planting beds and/or other permanent planting elements;~~
- ~~c) Decorative pavement patterns and tree grates;~~



*~~Figures 1-27. Examples of Category I streetscape pedestrian amenities.~~*

### ~~Category II:~~

- ~~a) Drinking fountain.~~
- ~~b) Ground-mounted Pedestrian-scaled lighting (placed between 12 feet and 14 feet above the ground) as approved by the Director.~~
- ~~c) Informational kiosks.~~
- ~~d) Transit shelters.~~



e) ~~Decorative clocks.~~

f) ~~Artwork such as sculptures, installations, or other artwork incorporated into sidewalk. Features above that are publicly funded, already required by code, and/or obstruct pedestrian movement (at least 8 feet of unobstructed horizontal clearance is required on all sidewalks) will not qualify as an amenity to meet this guideline.~~



~~Figures 1-28. Examples of Category II streetscape pedestrian amenities.~~

**1.4.3 Site Lighting.** ~~Provide adequate lighting levels in all areas used by pedestrians or automobiles, including building entries, walkways, parking areas, circulation areas, and other open space areas.~~

~~New developments shall provide site lighting that meets the following design criteria through implementing measures such as:~~

- a) ~~All public areas shall be lit with average minimum and maximum levels as follows:~~
  - ~~i) Minimum (for low or non-pedestrian and vehicular traffic areas) of 0.5 foot candles;~~
  - ~~ii) Moderate (for moderate or high volume pedestrian areas) of 1-2 foot candles; and~~
  - ~~iii) Maximum (for high volume pedestrian areas and building entries) of 4 foot candles.~~
- b) ~~Lighting shall be provided at consistent levels, with gradual transitions between maximum and minimum levels of lighting and between lit areas and unlit areas. Highly contrasting pools of light and dark areas shall be avoided.~~
- c) ~~Parking lot lighting fixtures shall be non-glare and mounted no more than 25 feet above the ground, with lower fixtures preferable so as to maintain a human scale. Requests for higher lighting fixtures may be considered with the approval of the Director. All fixtures over 15 feet in height shall be fitted with a full cut-off shield.~~

- ~~d) Pedestrian-sealed lighting (light fixtures no taller than 14 feet) is encouraged in areas of pedestrian activity. Lighting shall enable pedestrians to identify a face 45 feet away in order to promote safety.~~
  - ~~e) Lighting should not be permitted to trespass onto adjacent private parcels nor shall light source (luminaire) be visible at the property line. All building lights shall be directed onto the building itself and/or the ground immediately adjacent to it. The light emissions should not be visible above the roofline of the building. Light fixtures other than traditional cobra heads are encouraged.~~
- ~~1.4.4 Landscaping.~~** ~~Developments in the CBD incorporating landscaped areas are subject to SMC Chapter 18.41 requirements with the following exceptions/provisions:~~
- ~~a) Properties adjacent to Main Street are exempt from the requirements of SMC 18.41.040.~~
  - ~~b) *Green roofs* may be used to meet up to 100 percent of required landscaped area. Such roofs shall have a substrate depth of at least 4 inches designed to accommodate a variety of hardy, drought-resistant plant species.~~



*~~Figures 1-29. Green roof example.~~*

- ~~c) Permeable pavements may count for up to 30 percent of the required landscaped areas based on the level of permeability and long term maintenance capabilities as determined by the Director.~~

## 2. Commercial Guidelines

---

### Contents

2. Commercial Guidelines .....	1
2.1 Site Design and Parking .....	4
2.2 Pedestrian Access and Amenities.....	14
2.3 Building Character and Massing .....	21
2.4 Building Details and Materials.....	29
2.5 Streetscape and Landscaping.....	33

### Introduction

#### Applicability

These guidelines apply to all new development and re-development within the General Commercial (GC), Interchange Commercial (IC), Neighborhood Commercial (NC), and Central Business District (CBD) outside of the Town Center Mixed-Use Development (MUD) zones unless specifically noted. For example, there are some guidelines that apply only to properties fronting on East Main Street. In such instances, the text in the guideline will clearly spell out what properties are applicable.

For mixed-use buildings featuring residential uses, the residential portions of the building and site must comply with the Multifamily Design Guidelines. This shall include open space and building design guidelines and may include other *multifamily* design guidelines, depending on the nature of the development. Single purpose *multifamily* or single-family developments (where allowed) in these zones are exempt from these design guidelines and must instead comply with the Multifamily Design Guidelines or Single-Family Design Guidelines, respectively.

#### Relationship to Sumner Municipal Code (SMC)

These guidelines shall serve as a supplement to the standards of SMC. Where there is a conflict between the guidelines herein and the standards in SMC, these guidelines shall apply as they are more specific in nature.

#### Sumner Urban Design Concept Plan

The Sumner Urban Design Concept Plan defines public design elements that are intended to reinforce Sumner's pedestrian scale and small town character. Where the design guidelines address development of private land, the Urban Design Concept plan describes necessary public improvements to link downtown with public facilities and other commercial districts. The plan describes the overall goals, public investment strategy, and a description of implementation mechanisms for funding these improvements.



### Sumner Town Center Plan

This document provides the policy and housing analysis for revitalizing the downtown core and encouraging development of more housing to serve local businesses and utilize the Sounder station. The Town Center Plan is an area within close proximity to the Sounder commuter rail station and is intended to be a pedestrian oriented area with a mix of housing and commercial uses.

### District Objectives

#### *NC, Neighborhood Commercial District*

The NC district is intended to provide for convenient retailing and other commercial services principally oriented to adjacent residential areas and neighborhoods. The NC zone, as with other commercial zones, allows residential uses as a secondary use. Developments are encouraged to include a combination of retail, office, service and residential uses – mixed either vertically (one use above another) or horizontally (different uses side by side). While buildings in this district can be larger than those of surrounding residential neighborhoods, architectural treatments that help to reduce the perceived scale and fit well into the neighborhood's context are particularly important.

#### *GC, General Commercial District*

The GC district is intended to provide for retailing and other commercial services that serve the large market area surrounding the Sumner community. In this respect, GC district regulations are intended to accommodate conventional commercial development that is typical to urban areas such as shopping centers, commercial malls and office complexes. While such commercial developments usually rely upon the automobile as their principal source of access, they should be designed to encourage pedestrian access.

#### *IC, Interchange Commercial District*

The IC district is intended to provide for retailing and other commercial services that are easily accessible from the freeway, yet are not located near residential districts. Such commercial developments primarily rely on the automobile as their principal source of access, yet the design will need to accommodate good pedestrian access. Specific areas are located in the vicinity of the 24<sup>th</sup>/28<sup>th</sup> street interchange off of SR-167, and the 166<sup>th</sup> Ave/ SR-410 area. The design of these often highly visible developments are important to the character of Sumner.

#### *MUD, Mixed-Use Development District*


The MUD district is intended to provide for a mix of residential and appropriate commercial services within close proximity to the historic central business district and increased housing density near regional transit centers. Good pedestrian access and amenities are top priorities in the design of developments.

#### *East Main Street Commercial*

East Main Street is a special design overlay area shown on the zoning map and described in the City's East Main Street Design Strategy document. The objectives for this area are to create an

area that is safe and friendly to pedestrians while accommodating the automobile and to maintain or increase existing business activity.

Figure 2-1. Zoning districts applicable to these guidelines.

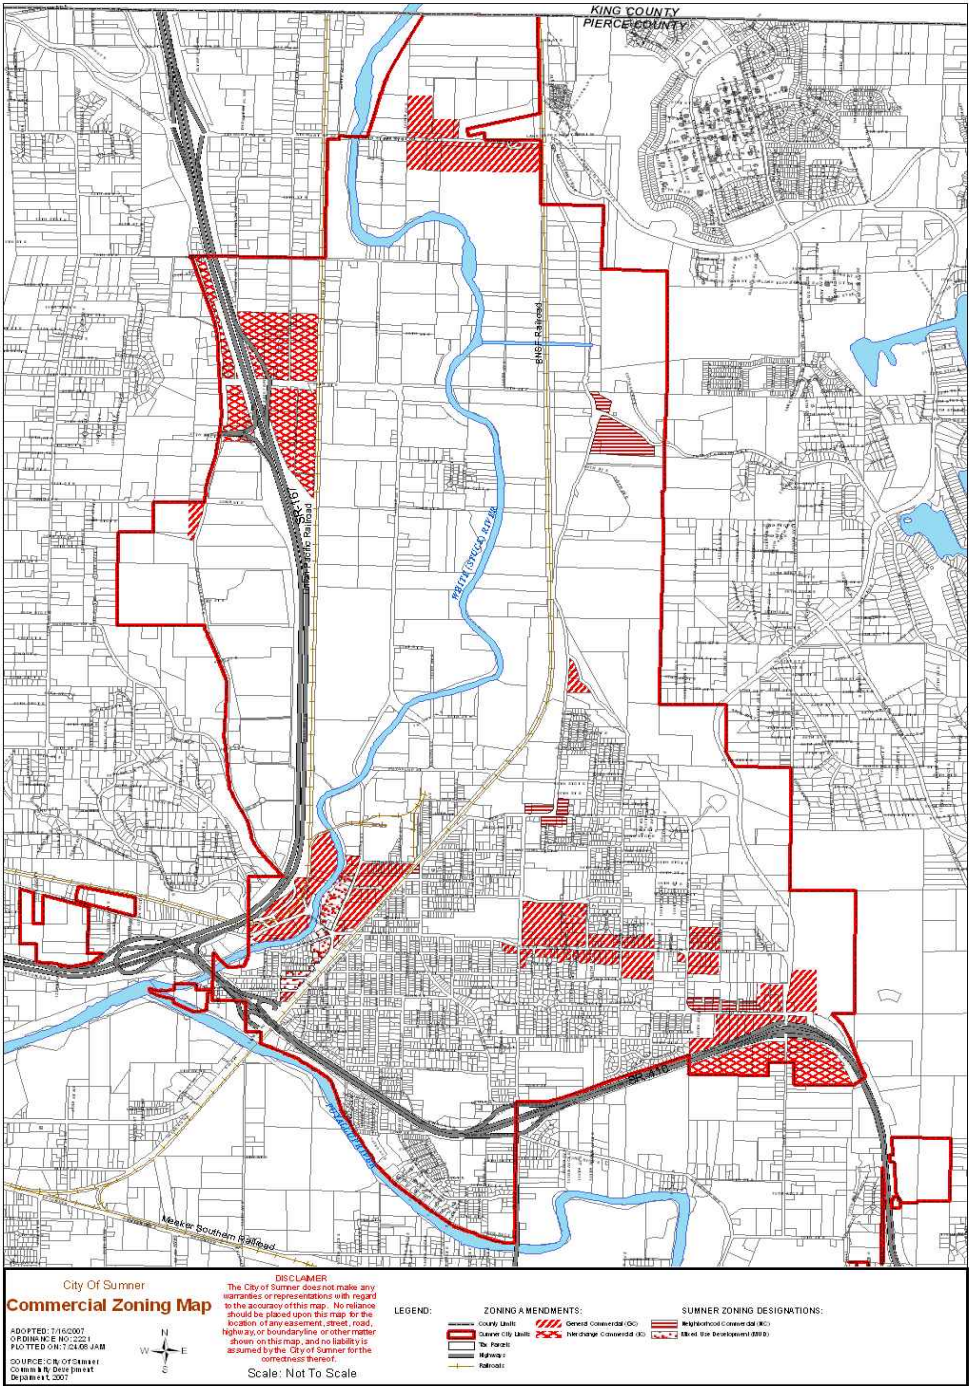

## 2.1 Site Design and Parking

### Intent

- ◆ Create streets which are safe and attractive to pedestrians.
- ◆ Provide activity and interest along the street.
- ◆ Create a sense of enclosure by encouraging development to orient toward the street.
- ◆ Reduce the impact of parking lots and *blank walls* located adjacent to the street.
- ◆ Allow adequate vehicular and pedestrian access to both commercial and live/work buildings.
- ◆ Encourage safe and pleasant environments for pedestrians moving between cars/transit and their commercial destinations.

### Guidelines

#### 2.1.1 Building location guidelines:

- a) Non-residential and mixed-use buildings may be placed up to the edge of the sidewalk of any street (unless otherwise noted) only if they feature a *pedestrian-oriented facade*.

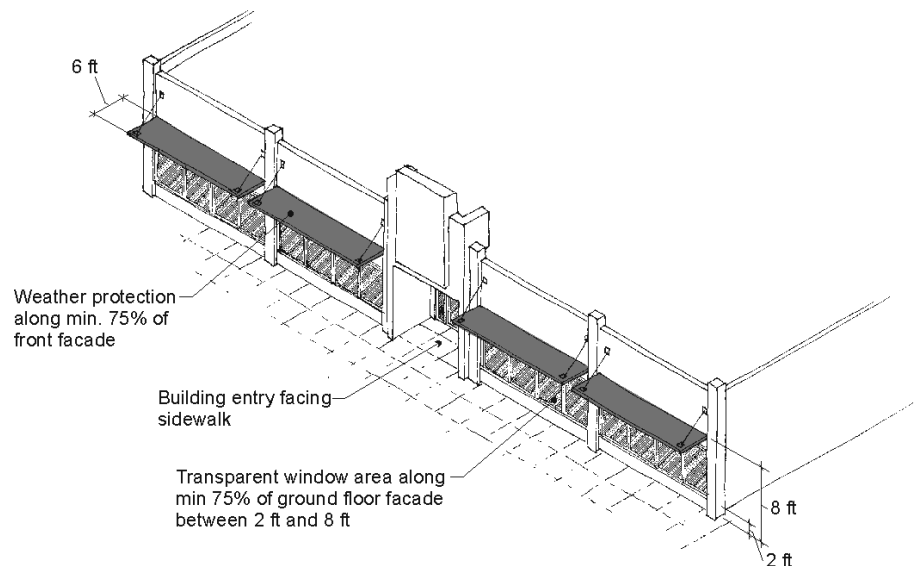


Figure 2-2. Standards to meet the definition of a pedestrian-oriented facades.

- b) All non-residential buildings located along E. Main Street shall be placed up to the edge of the sidewalk and shall feature a *pedestrian-oriented facade*. Exceptions are provided in SMC 18.16.080(Q).
- c) All other non-residential and mixed-use buildings that are not located adjacent to the sidewalk must feature at least 10 feet of *Landscaping Type C* or *pedestrian-oriented space* between the sidewalk or front property line and the building.

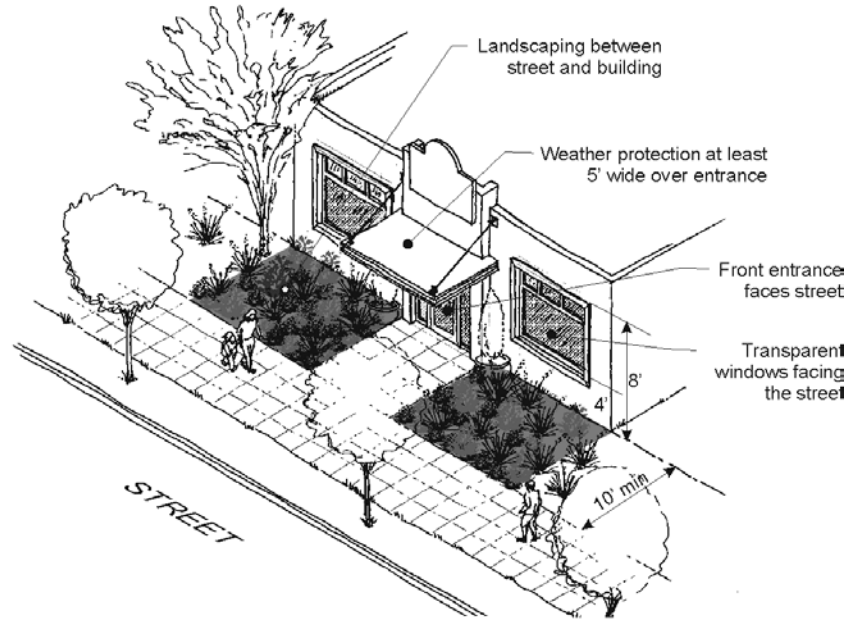


Figure 2-3. Landscaped front setback.

Reduced setbacks will be considered provided the proposed landscaping and/or building design treatment adds visual interest to the street and creates a comfortable environment for pedestrians. Special standards and considerations for exceptions:

- i) All buildings within 5 feet of the sidewalk should provide a minimum transparency of 50 percent for the ground floor facade between 4 and 8 feet above the sidewalk level.
- ii) Low level landscaping elements are usually needed to cover foundation materials while maintaining visibility between sidewalk and ground floor windows.
- iii) Raised or terraced planting beds between a sidewalk and building can be an attractive way of defining the street and providing a comfortable transition between the sidewalk and building – particularly where buildings have a limited amount of transparency on the ground floor.



Figure 2-4. Reduced landscaped setbacks will be considered provided the landscaping and building design treatment adds visual interest to the street and creates a comfortable environment for pedestrians.

### **2.1.2 Building orientation.** All buildings shall be oriented towards the street. To meet this requirement:

- a) Building entries must face the street. Exceptions:
  - i) For multi-building developments where one or more buildings are located away from the street, the building entries for those buildings not adjacent to the street must be clearly visible and/or accessible from the street.
  - ii) For street corner buildings, an entry on the corner or entries fronting on both streets are encouraged, but one entry only on the primary street may be permitted, provided the proposed design treatment on the secondary street meets the intent of the guidelines.
  - iii) For the GC and IC Districts, entries may be on the side of buildings provided the entry is clearly visible and accessible from the street.
- b) The facade must have transparent windows and/or doors covering at least 25 percent of the ground floor facade between 4 and 8 feet above the sidewalk. Exceptions:
  - i) For street corner buildings, the Director may reduce the transparency on the secondary street provided the proposed building and landscaping design provide visual interest and create a comfortable pedestrian environment.
  - ii) Reduced transparency proposals will be considered provided alternative design treatments meet the intent of the guidelines, provide an interesting pedestrian experience, and are compatible with the existing and/or desired character of the area. Examples could include, but are not limited to, a vertical trellis with vine plants, a mural, a series of terraced planting beds between the façade and the sidewalk, or distinctive building details that provide interest at a pedestrian scale. A blank wall with no windows and a simple evergreen planting screen will not be enough to meet the intent of the guidelines.

### **2.1.3 Parking location guidelines.** Parking should be located behind structures, away from streets. Specifically:

- a) Parking lots shall not be located between the street and any building.
- b) For properties where at least some street front parking and vehicular access is unavoidable, as determined by the Director, no more than 30 percent of the primary street frontage and no more than 75 percent of the secondary street frontage may be occupied by parking and vehicle access. Design elements must be included to screen parking areas and maintain visual continuity along the street. This could include a combination of trees, lighting, decorative banners, and architectural elements such as a low wall (approximately 3 feet in height) or a trellis.
- c) For properties in the IC zones, parking should be placed to the side or rear of buildings. For multi-building developments, no more than 50 percent of the street frontage may be occupied by parking lots and vehicle access areas. The Director may grant the following exceptions to this requirement provided design elements are included to maintain visual continuity along the street:
  - i) The applicant can successfully demonstrate that an increased amount of street front parking allows for a more desirable development configuration in terms of pedestrian access and amenities.
  - ii) Vehicle sales lots: Areas for display vehicles may be provided between the building and the street.



- d) Except for permitted garage entrances, structured parking on the ground floor may not occupy the primary street frontage. For street corner sites, structured parking may occupy up to 75 percent of the street frontage on the secondary street.
- e) Parking is prohibited on street corner sites.

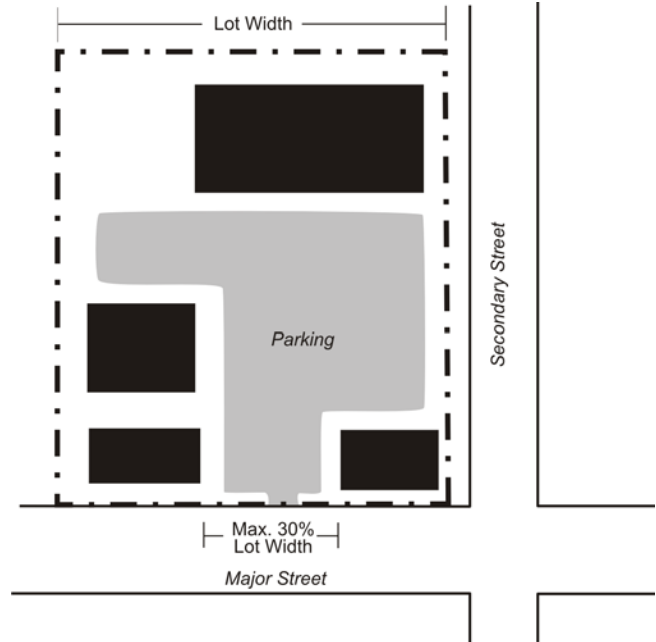


Figure 2-5. Parking lot location standards for East Main Street or within the NC and MU zones, where at least some on-street parking and vehicular access is unavoidable.

### 2.1.4 Parking lot screening. One of the following screening methods shall be provided between the sidewalk and any parking area:

- a) Provide at least 10 feet of *Landscaping Type C*.

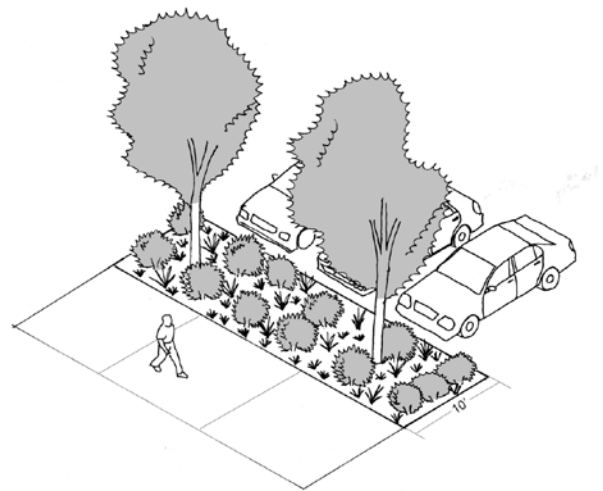


Figure 2-6. 10-foot parking lot buffer with Landscaping Type C.

- b) Provide a 5-foot wide planting bed that incorporates a continuous low wall (approximately 3 feet tall). The planting bed shall be in front of the wall and feature



*Landscaping Type C.* Alternative landscaping schemes will be considered by the Director provided they meet the intent of the guidelines. The wall shall be constructed of brick, stone, decorative concrete or concrete block, or other permanent material that provides visual interest and helps to define the street edge as determined by the Director and as recommended by the Design Commission.

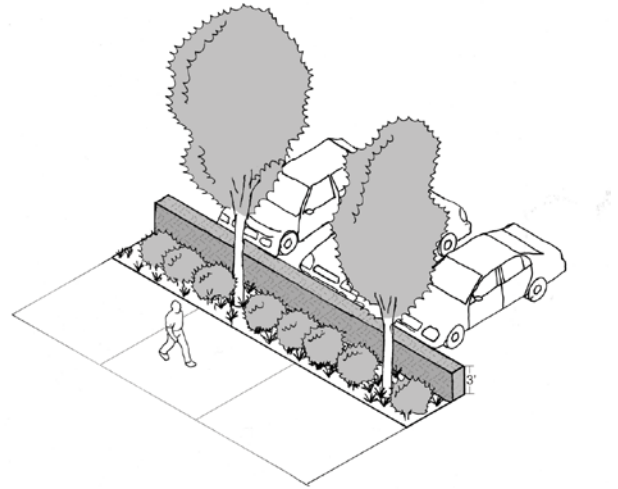


Figure 2-7. Parking lot planting buffer with low wall.

- c) Provide an elevated planter which is a minimum of 5 feet wide and between 2 and 3 feet in height. Ledges that are approximately 12 inches in width are encouraged as they can double as a seating area. The planter must be constructed of masonry, concrete or other permanent material that effectively contrasts with the color of the sidewalk and combines groundcover and annuals, perennials, ornamental grasses, low shrubs, and/or small trees that provide seasonal interest as determined by the Director and as recommended by the Design Commission.

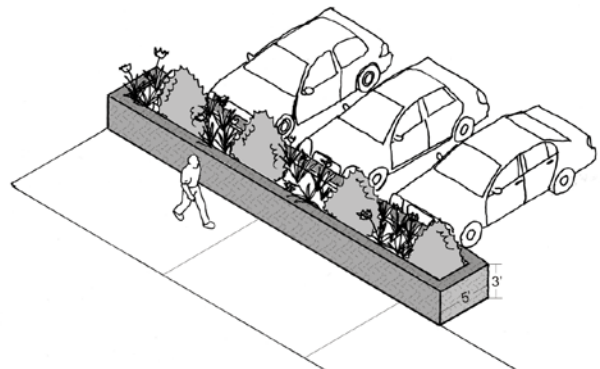


Figure 2-8. Elevated parking lot planting buffer.

Both options (i) and (ii) should choose and maintain plantings to maintain eye level visibility between the street/sidewalk and parking area for safety. This means that shrubs

and other low plantings should be maintained below 3 feet in height while trees (once they achieve taller heights) should generally be trimmed to up to the 8-foot level.

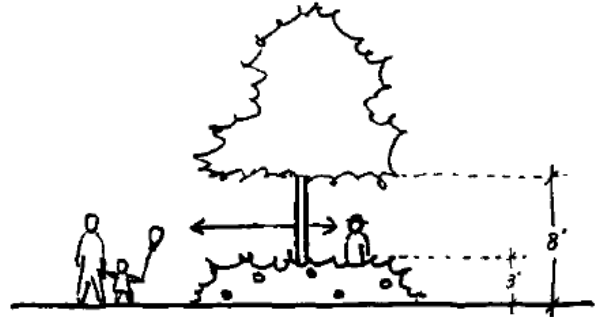


Figure 2-9. Parking lot planting buffers shall emphasize the 3:8 rule for visibility and safety.

**2.1.5 Driveways.** New driveways should be located and designed to minimize impacts on the pedestrian environment. Specifically:

- a) Parking lot entrances, driveways, and other vehicle access routes onto private property from a street may be restricted to no more than 25 feet of driveway width per 150 linear feet of street frontage as measured horizontally along the street face.
- b) Properties with less than 150 linear feet of street frontage shall make a genuine effort to negotiate shared access with adjoining property owners. One entry and one exit lane for vehicle access will be allowed after there is demonstrable evidence, acceptable to the Director, that shared access is not feasible.
- c) Vehicular access to corner lots shall be located on the lowest classified roadway and as close as practical to the property line most distant from the intersection.  
Exception: Corner lots may have one entrance per street provided the owner provides evidence acceptable to the Director that they are unable to arrange joint access with an abutting property.
- d) Parking garage entries must not dominate the streetscape. They should be designed and sited to complement, not subordinate, the pedestrian entry.
- e) Driveways and vehicular access in the East Main Street Area are regulated by SMC 18.43.



Figure 2-10. The parking garage for this mixed-use building is tucked behind the facade of the building and advertised with a simple sign and driveway.

### 2.1.6 Vehicular Access. Specific standards:

- Developments should provide a safe and convenient network of vehicular circulation that connects to the surrounding road/access network and provides the opportunities for future connections to adjacent parcels, where applicable. For example, large sites (at least 2 acres) should generally utilize a network of vehicular connections at intervals of no more than every 400 feet. This is on a scale similar to most pedestrian-oriented downtowns.
- Where abutting developed land provides road stub-outs, easements, or other methods to provide the opportunity for future road connections, the interior network of new development shall be designed to utilize these connections.
- Properties within the East Main Street Area shall provide vehicular access per SMC 18.43

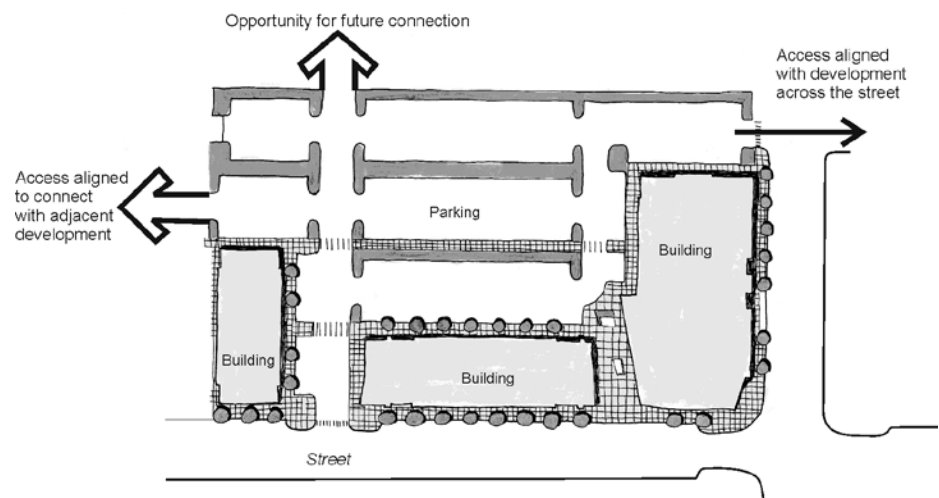


Figure 2-11. Provide for shared driveways and coordinated access.

**2.1.7 Street corners.** Development proposals for street corner sites shall include at least one of the design treatments described below:

- a) Locate a building towards the street corner (within 15 feet of corner property line).
- b) Provide *pedestrian-oriented space* at the corner leading directly to a building entry or entries.



Figure 2-12. Desirable street corner design treatments.

### 2.1.8 Service, Loading, and Garbage Area Guidelines.

- a) Service, loading, refuse and storage areas shall be located and designed to minimize the impacts on the streetscape, pedestrian areas, and customer parking areas. Solid waste receptacles visible from the street, customer parking areas, and residential units shall be surrounded on at least three sides by a wall. Such enclosures shall be designed compatible with the primary structure(s) onsite by using concrete block or other durable materials compatible with the primary structure(s). Enclosures located in a parking lot shall feature self-closing doors.
- b) Landscaping or other forms of screening shall be provided around outdoor service, storage, loading and mechanical areas, utility meters, electrical conduit, and other service and utilities apparatus to provide sensory (visual, olfactory, auditory) screening from adjacent properties, streets, affected pedestrian circulation routes, and affected *pedestrian-oriented spaces*.
- c) No large outside item display areas are permitted (e.g. kitchen appliances or other similarly large merchandise that is visible from the street).
- d) All rooftop mechanical equipment shall be organized, proportioned, detailed, landscaped (with decks or terraces) and colored to be an integral element of the building.
- e) Exterior mechanical devices shall conform to SMC 18.16.080(A) concerning noise impacts.

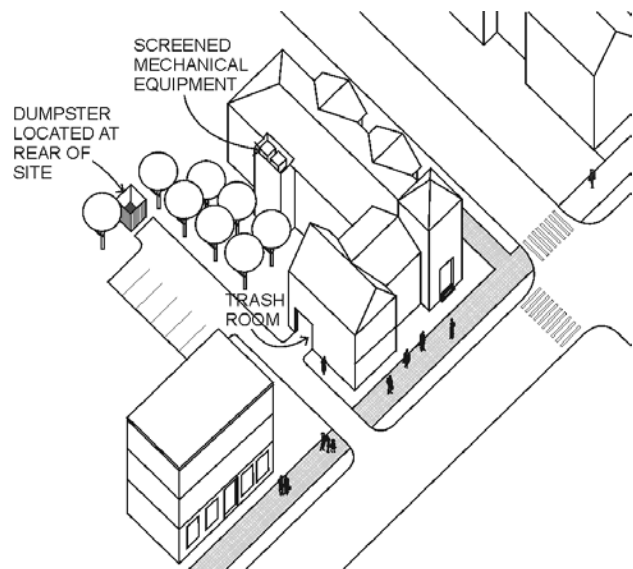


Figure 2-13. Service elements shall be located to minimize impacts on the streetscape and pedestrian environment.

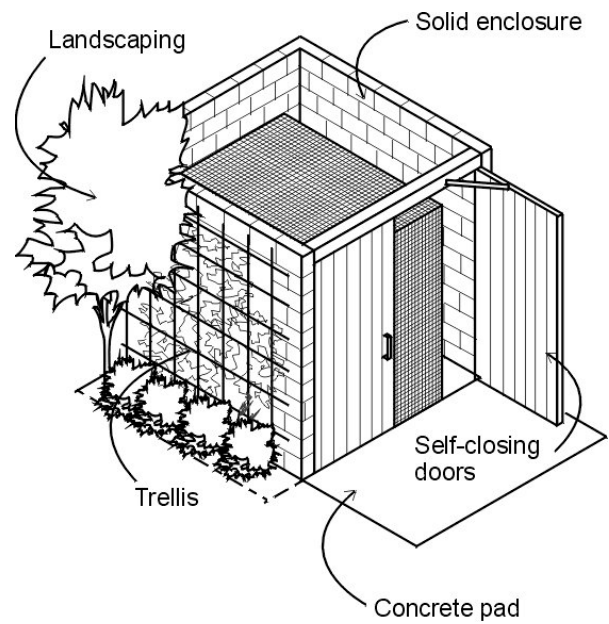


Figure 2-14. An acceptable service enclosure with landscaped screening.

**2.1.9 Multiple Building and Large Lot Development.** Developments with more than 20,000 square feet of gross floor area should take advantage of special opportunities and mitigate impacts. Applicants shall demonstrate how their development features a unifying organization that accomplishes the following goals:

- Mitigate transportation impacts and facilitate better traffic circulation by connecting through streets, where applicable.
- Provide convenient and connected pedestrian access system.
- Encourage buildings to complement adjacent activities and visual character (where desirable).
- Arrange buildings in clustered masses that enhance the pedestrian environment within the development and along street frontages. For example, consider clustering small retail stores in close proximity to large retail stores and clustering smaller retail shops front on the main arterial as separate building “pads.”
- Incorporate open space and landscaping as a unifying feature.
- Incorporate screening, environmental mitigation, utilities, and drainage as a positive element.

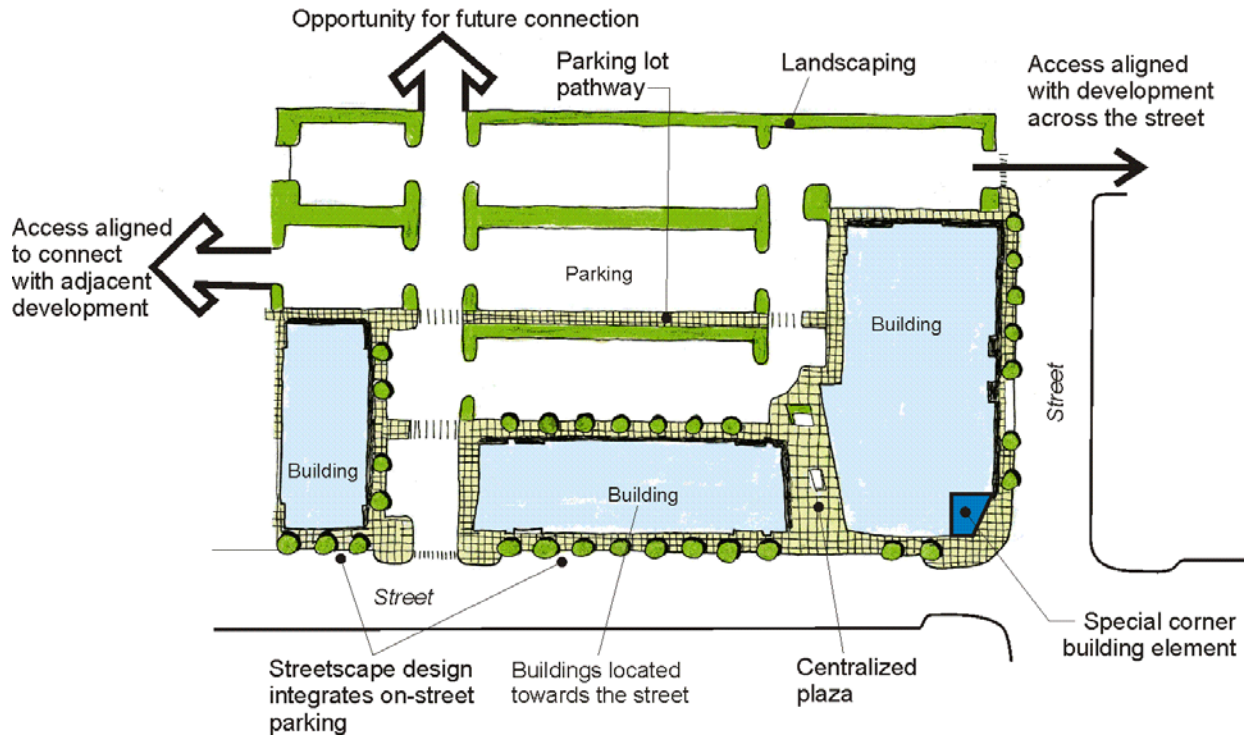


Figure 2-15. Acceptable large lot development example.



## 2.2 Pedestrian Access and Amenities

### Intent

- ◆ Improve the pedestrian environment by making it easier, safer and more comfortable to walk throughout commercial areas.
- ◆ Enrich the pedestrian environment and encourage pedestrian activity by improving access and connectivity for pedestrians.
- ◆ Reduce conflicts between pedestrians and automobiles.

### Guidelines

#### 2.2.1 Internal pedestrian circulation guidelines:

- a) All buildings must have clear pedestrian access to the sidewalk. Where a use fronts two streets, access shall be provided from the road closest to the main entrance, but preferably from both streets.
- b) Developments must include an integrated pedestrian circulation system that connects buildings, open spaces, and parking areas with the adjacent street sidewalk system.
- c) For sites abutting vacant or underdeveloped land, the Director may require new development to provide for the opportunity for future connection to its interior pathway system through the use of pathway stub-outs, building configuration, and/or parking lot layout. For example, a grid of pedestrian connections at intervals of 200-300 feet would meet the “Intent” statements above and be scaled similar to traditional Sumner block sizes in downtowns.
- d) Provide pathways through parking lots. A paved walkway or sidewalk must be provided for safe walking areas through parking lots greater than 150 feet long (measured either parallel or perpendicular to the street front). Walkways shall be provided for every three parking aisles or spaced no more than 150 feet apart shall be maintained between paths (which ever is more restrictive). Such access routes through parking areas shall utilize pedestrian-scaled lighting (lights mounted no higher than 14 feet) and contrasting paving material. Walkways shall be separated from vehicular access and parking areas by 5-foot minimum planting strips with *Landscaping Type C*. Alternative configurations will be considered by the Director where such treatments create a more desirable configuration/design in terms of pedestrian access and visual or environmental amenities.
- e) Crosswalks are required when a walkway crosses a paved area accessible to vehicles. The crosswalk shall use contrasting paving material that differentiates it from the parking lot.
- f) Developments must continue the sidewalk pattern and material across driveways.



*Figure 2-16. A generous landscaped walkway through a shopping center parking lot.*

**2.2.2 Weather protection.** Provide pedestrian weather protection in public spaces such as transit stops, building entries, along display windows, and over outdoor dining areas. Specifically:


- a) Weather protection at least 5 feet deep is required over all primary building, individual business, and individual residence entries. This may include a recessed entry, canopy, porch, marquee, or building overhang.
- b) Canopies, awnings, or other similar weather protection features should not be higher than 15 feet above the ground elevation at the highest point or lower than 8 feet at the lowest point. The street-side edge of the canopy or awning shall be at least 8 feet above the walking surface.
- c) Multi-tenant retail buildings are encouraged to use a variety of weather protection features to emphasize individual storefronts and reduce the architectural scale of the building.



*Figure 2-17. The multiple awning configuration on this building helps to articulate the facade and add visual interest to the building.*

### 2.2.3 Internal Pedestrian Paths and Circulation. Provide appropriate pathway widths to accommodate the anticipated pedestrian activity and create a comfortable pedestrian environment. Specifically:

- a) All internal pathways must be at least 5 feet in width.
- b) Pathways along the facade of mixed-use and retail buildings 100 feet or more in length (measured along the facade) that are not located adjacent to a street must be at least 12 feet wide with 8 feet minimum unobstructed width and include the following:
  - i) Street trees, as approved by the Director, should be placed at an average of 30 feet on-center and placed in grates. Breaks in the tree coverage will be allowed near major building entries to enhance visibility. However, no less than 1 tree per 60 lineal feet of building facade must be provided;
  - ii) Planting strips may be used between any vehicle access or parking area and the pathway, provided that the required trees are included and the pathway is at least 8 feet in width and the combined pathway and planting strip is at least 15 feet in width; and
  - iii) Pedestrian-scaled lighting may be used as a substitute to the required street trees subject to Director approval, provided they are used at the same intervals.
- c) For all other interior pathways, the applicant must demonstrate to the Director's satisfaction that the proposed walkway is of sufficient width to accommodate the anticipated number of users. For example, a 10- to 12-foot pathway can accommodate groups of persons walking four abreast, or two couples passing one another. An 8-foot pathway will accommodate three persons walking abreast, while a 5-foot pathway will allow two individuals to pass comfortably

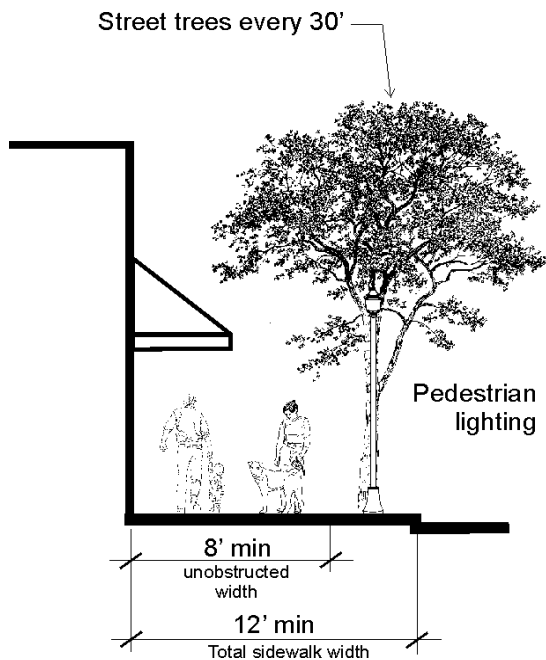

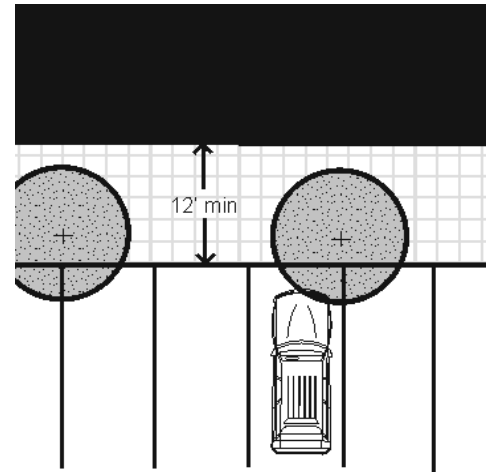


Figure 2-18. Internal pedestrian paths should look and function like a public sidewalk.

**2.2.4 Secondary entrance design elements.** All commercial uses containing a secondary side or rear customer entrance shall incorporate at least two of the following design elements to visually enhance such entries:

- a) Weather protection over the entry at least 3 feet wide in the form of awnings, marquees, canopies, or overhangs.
- b) Decorative pedestrian-oriented signage consistent with SMC 18.44 that highlights the entry and adds visual interest.
- c) *Pedestrian-oriented space* or designated outdoor eating areas.
- d) Fixed landscaping elements, including one of the following:
  - i) Landscaped planter or fixed planter box incorporating decorative groundcover, shrubs, and/or trees.
  - ii) A trellis or other similar architectural element that incorporates landscaping.
- e) Decorative pedestrian-scaled lighting fixture(s).
- f) Special building details that highlight the entry and add visual interest.
- g) Other features that meet the intent of the guidelines as determined by the Director and as recommended by the Design Commission.



Figure 2-19. An example of a secondary entrance that has been enhanced with outdoor seating, an awning, pedestrian-scaled signage, and windows.

**2.2.5 Pedestrian-oriented space.** All non-residential development shall provide *pedestrian-oriented space* (designed consistent with the definition below) according to the formula below:

- 2 percent of the lot area + 1 percent of the non-residential building area. This total area can be provided in one large space or split up into a few smaller spaces.

Note: Minimum required sidewalks or interior walkway areas shall not count as *pedestrian-oriented space*. However, where walkways are widened beyond minimum requirements, the widened area may count as *pedestrian-oriented space* if the Director determines that the area meets the definition of *pedestrian-oriented space*.

A *pedestrian-oriented space* is an area that promotes pedestrian activity, subject to the following:

- a) To qualify as a *pedestrian-oriented space*, an area must have:
  - i) Spaces must be positioned in areas with significant pedestrian traffic to provide interest and security – such as adjacent to a building entry.
  - ii) Paved walking surfaces of either concrete or approved unit paving.
  - iii) Pedestrian-scaled lighting (no more than 14 feet in height) at a level averaging at least 2-foot candles throughout the space. Lighting may be on-site or building-mounted lighting.
  - iv) At least three feet of seating area (bench, ledge, etc.) or one individual seat per 60 square feet of plaza area or open space.
  - v) Pedestrian access to the abutting structures from the street, private drive, or a non-vehicular *courtyard*.
  - vi) Landscaping components that add seasonal interest to the space.
- b) The following features are encouraged in *pedestrian-oriented space*:
  - i) Pedestrian amenities such as a water feature, drinking fountain, and/or distinctive paving or *artwork*.
  - ii) Provide *pedestrian-oriented facades* on some or all buildings facing the space.
  - iii) Consideration of the sun angle at noon and the wind pattern in the design of the space.



- iv) Transitional zones along building edges to allow for outdoor eating areas and a planted buffer.
- v) Movable seating.
- c) The following features are prohibited within *pedestrian-oriented space*:
  - i) Asphalt or gravel pavement.
  - ii) Adjacent unscreened parking lots.
  - iii) Adjacent chain link fences.
  - iv) Adjacent *blank walls*.
  - v) Adjacent dumpsters or service areas.
  - vi) Outdoor storage or retail sales that do not contribute to the pedestrian environment.  
An example is stacked bags of potting soil or compost, which are common in front of grocery stores during the spring and summer. The area used for such purposes will not be counted as *pedestrian-oriented space*.

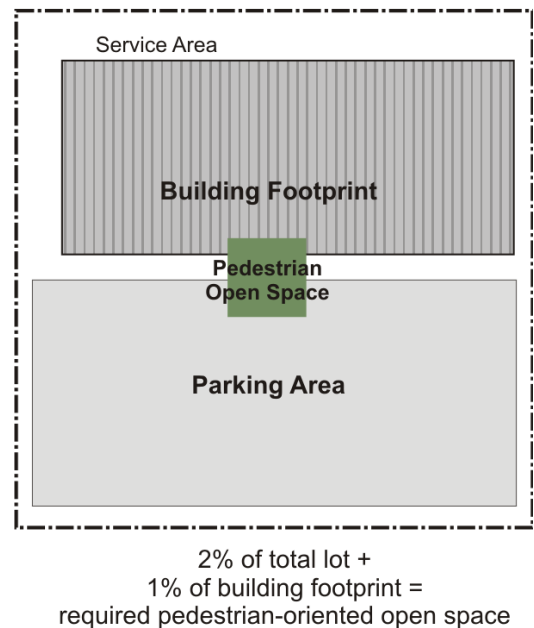


Figure 2-20. Illustrating the amount of pedestrian-oriented space that would be required for a typical single story retail building with surface parking.





Figure 2-21. Examples of pedestrian-oriented open spaces in commercial areas.

**2.2.6 Site Lighting.** Provide adequate lighting levels in all areas used by pedestrians or automobiles, including building entries, walkways, parking areas, circulation areas, and other open space areas.

New developments shall provide site lighting that meets the following design criteria through implementing measures such as:

- a) All public areas shall be lighted with average minimum and maximum levels as follows:
  - i) Minimum (for low or non-pedestrian and vehicular traffic areas) of 0.5 foot candles;
  - ii) Moderate (for moderate or high volume pedestrian areas) of 1-2 foot candles; and
  - iii) Maximum (for high volume pedestrian areas and building entries) of 4 foot candles.
- b) Lighting shall be provided at consistent levels, with gradual transitions between maximum and minimum levels of lighting and between lit areas and unlit areas. Highly contrasting pools of light and dark areas shall be avoided.
- c) Parking lot lighting fixtures shall be non-glare and mounted no more than 25 feet above the ground, with lower fixtures preferable so as to maintain a *human scale*. Requests for higher lighting fixtures may be considered with the approval of the Director. All fixtures over 15 feet in height shall be fitted with a full cut-off shield.
- d) Pedestrian-scaled lighting (light fixtures no taller than 15 feet) is encouraged in areas of pedestrian activity. Lighting shall enable pedestrians to identify a face 45 feet away in order to promote safety.
- e) Lighting should not be permitted to trespass onto adjacent private parcels nor shall light source (luminaire) be visible at the property line. All building lights shall be directed onto the building itself and/or the ground immediately adjacent to it. The light emissions should not be visible above the roofline of the building. Light fixtures other than traditional cobra heads are encouraged.

## 2.3 Building Character and Massing

### Intent

- ◆ Preserve historic details in buildings which typify Downtown Sumner's small town character.
- ◆ Encourage preservation, rehabilitation, restoration, or reconstruction of historical properties based on appropriate historic information, materials, and methods.
- ◆ Reduce the bulk and mass of buildings compatible with Sumner's small sense of scale.
- ◆ Encourage the use of creative design details and small scale elements into building facades that are attractive at a pedestrian scale and add visual interest.
- ◆ Preserve Sumner's traditional, compact, pedestrian-scaled network.
- ◆ Maintain a compact rhythm of storefronts for retail buildings.
- ◆ Encourage high quality building materials that will promote the character and identity of Sumner.
- ◆ Discourage colors that are not compatible with the character of Sumner.
- ◆ Avoid a generic appearance and chain or franchise architecture that is trademarked, branded, or easily identified with a particular national or regional chain or commercial franchise.

### Guidelines

- 2.3.1 No franchise and corporate architecture.** The use of stock building plans, typical corporate and/or franchise designs, or other designs which are easily identified with a particular chain or corporation are not allowed. "Regional prototype alternatives," may be considered as an alternative by the Director if all other design criteria have been met.



Figure 2-22. Generic franchise and corporate architecture is not allowed in the CBD.



Figure 2-23. Examples from other communities where a fast food franchise's architecture was modified to fit into the context of the community.

- 2.3.2 Design all visible facades.** All facades of a building shall be given equal design consideration. Some flexibility may be given by the Director for alley or other facades that are not visible from streets, parks, parking lots, or other uses.
- 2.3.3 Unique designs.** Designs which are unique and utilize generic products and integrate them into the building design may be considered.
- 2.3.4 Facade articulation in the NC and MU districts, facades along East Main Street, and on storefronts adjacent to a sidewalk.** All non-residential building facades fronting on a street or containing a pedestrian entrance must include at least two of the following *articulation* features at intervals no greater than 30 feet.
- Use of window and/or entries that reinforce the pattern of small storefront spaces.

- b) Use of weather protection features that reinforce the pattern of small storefronts. For example, for a business that occupies three lots, use three separate awnings to break down the scale of the storefronts. Alternating colors of the awnings may be useful as well.
- c) Change of roofline.
- d) Change in building material or siding style.
- e) Other methods that meet the intent.



Figure 2-24. For commercial buildings built up to the sidewalk, provide facade articulation features at no more than 30-foot intervals.

**2.3.5 Facade articulation for all other non-residential buildings not covered in Guideline 2.3.4 above.** All non-residential building facades fronting on a street or containing a pedestrian entrance must include at least three of the following *articulation* features at intervals no greater than 60 feet.

- a) Use of window and/or entries that reinforce the pattern of small storefront spaces.
- b) Providing building *modulation* of at least 2 feet in depth and 4 feet in width.
- c) Use of weather protection features that reinforce the pattern of small storefronts. For example, for a business that occupies three lots, use three separate awnings to break down the scale of the storefronts. Alternating colors of the awnings may be useful as well.
- d) Change of roofline.
- e) Change in building material or siding style.
- f) Providing lighting fixtures, trellis, tree, or other landscape feature within each interval.
- g) Other methods that meet the intent.

Exception: Alternative *articulation* methods will be considered by the Director provided such treatment meets the intent of the guidelines. For example, use of high quality building materials (such as brick or stone) with attractive detailing may allow a building to meet the intent of the guidelines using greater *articulation* intervals. Also, where the articulated features are more substantial in terms of effectively breaking up the façade



into smaller components, then a greater distance between architectural intervals may be acceptable.

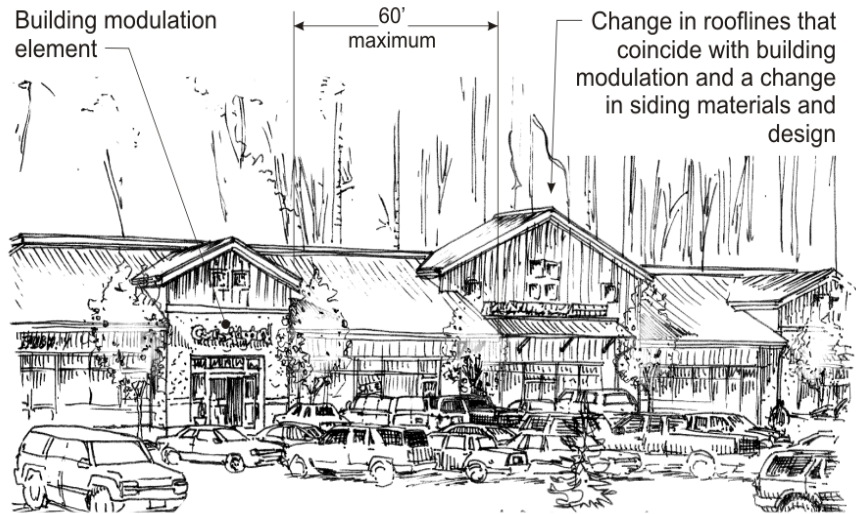


Figure 2-25. This example shows a commercial building with facade articulation every 60 feet.



Figure 2-26. This building uses a combination of material changes, modulation, a distinctive window pattern, and a trellis to reduce its perceived scale and add visual interest.

### 2.3.6 Rooflines:

- a) Rooflines visible from a public street, open space, or customer parking area must be varied by emphasizing dormers, gables, stepped roofs, prominent cornice or fascia, or a broke or articulated roofline. The width of any continuous flat roofline should extend no more than 100 feet without *modulation*. *Modulation* should consist of either:
  - i) For flat roofs or facades with a horizontal eave, fascia, or parapet, the minimum vertical dimension of roofline *modulation* is the greater of two feet or 0.1 multiplied by the wall height (finish grade to top of wall). The required change in elevation noted

above may be reduced by approximately  $\frac{1}{2}$  provided the roofline change corresponds with a change in building materials.

- ii) A sloped or gabled roofline segment of at least 20 feet in width and no less than 3 feet vertical in 12 feet horizontal.
- iii) A combination of the above.

The Director may relax this requirement if building incorporates other design treatments that reduce the perceived scale of the building, add visual interest, and complement the design of other nearby buildings.

- b) For buildings in the NC zone, pitched roofs with a minimum slope of 5/12 are preferred to maintain the residential character of the area.

**2.3.7 Maximum Facade Width.** The maximum facade width (the facade includes the apparent width of the structure facing the street) of the upper story of multi-story and large-scale retail buildings (with floor area greater than 50,000 square feet) visible from a street, public open space, or *pedestrian-oriented space* is 120. Buildings exceeding 120 feet in width along the street front shall be divided by a 30-foot wide *modulation* of the exterior wall, so that the maximum length of a particular facade is 120 feet. Such *modulation* must be at least 20 feet or deeper and extend through all floors except the ground floor where a *pedestrian-oriented facade* has been provided. Decks and roof overhangs may encroach up to 3 feet (per side) into the *modulation*. The Director will consider other design methods that are effective at reducing the perceived width of the building.



## Commercial Guidelines

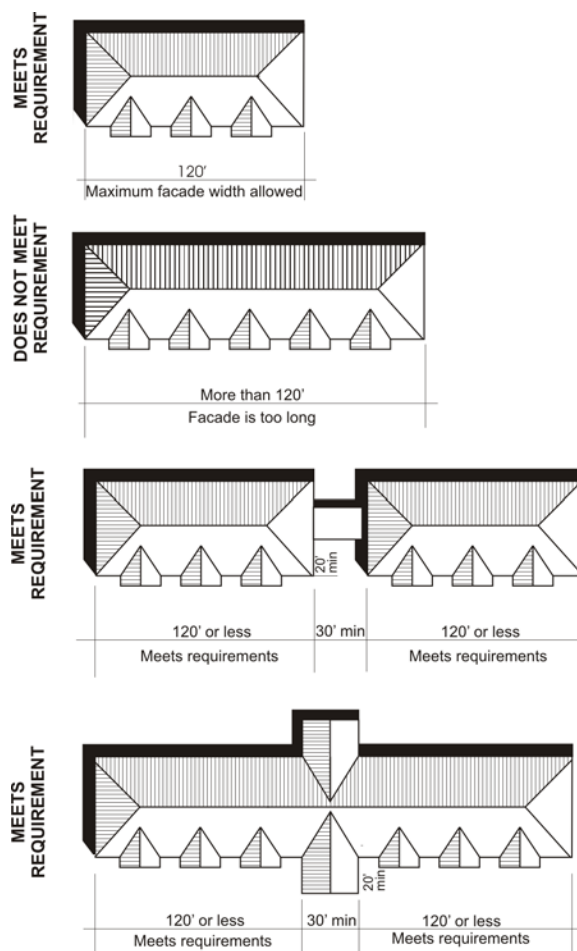


Figure 2-27. Illustrating maximum facade width standards.



Figure 2-28. Acceptable alternative design treatment for a building wider than 120 feet. Note the entry's clear vertical and horizontal modulation elements.

**2.3.8 First story commercial frontages.** In order to ensure the ground floor of structures has adequate height to function efficiently for retail uses, the first story's height to finished ceiling of new infill buildings must not be lower than 13 feet.

**2.3.9 Vertical articulation.** To moderate the vertical scale of multi-story buildings, the design shall include techniques to clearly define the building's top, middle and bottom. The following techniques are suggested methods of achieving vertical *articulation*:

- a) Top: Sloped roofs, strong eave lines, cornice treatments, horizontal trellises or sunshades, etc.
- b) Middle: Windows, balconies, material changes, railings and similar treatments that unify the building design.
- c) Bottom: Pedestrian-oriented storefronts, pedestrian-scaled building details, awnings, and arcades.



Figure 2-29. Multi-story buildings should provide a clearly defined top, middle, and bottom by utilizing a combination of storefront elements on the ground floor, defined window patterns and articulation treatments on upper floors, and a distinctive roofline and/or top floor.

**2.3.10 Blank walls.** Untreated *blank walls* visible from a public street or pedestrian pathway are prohibited.

- a) *Blank walls* - A wall (including building facades and retaining walls) is considered a *blank wall* if:
  - i) A ground floor wall or portion of a ground floor wall over 6 feet in height has a horizontal length greater than 15 feet and does not include a transparent window or door; or
  - ii) Any portion of a ground floor wall having a surface area of 400 square feet or greater does not include a transparent window or door.
- b) Untreated *Blank walls* facing a public street, *pedestrian-oriented space*, or pedestrian pathway are prohibited. Any new *blank walls* shall be treated through one or more of the methods below sufficient to meet the intent of the guidelines. For large walls, for example, a combination of treatments may be needed to break up the façade and provide visual interest. Owners of existing buildings containing visible *blank walls*

are encouraged to utilize one or more of the following treatments to add visual interest to the street.

- i) Transparent windows or doors;
- ii) Display windows
- iii) Landscape planting bed at least 5 feet wide or a raised planter bed at least 2 feet high and 3 feet wide in front of the wall with planting materials that are sufficient to obscure or screen approximately 1/3 of the wall's surface within three years.
- iv) Installing a vertical trellis in front of the wall with climbing vines or plant materials.
- v) *Artwork* (mosaic, mural, sculpture, relief, etc.) over approximately 1/2 of the *blank wall* surface.
- vi) Other methods that meet the intent.

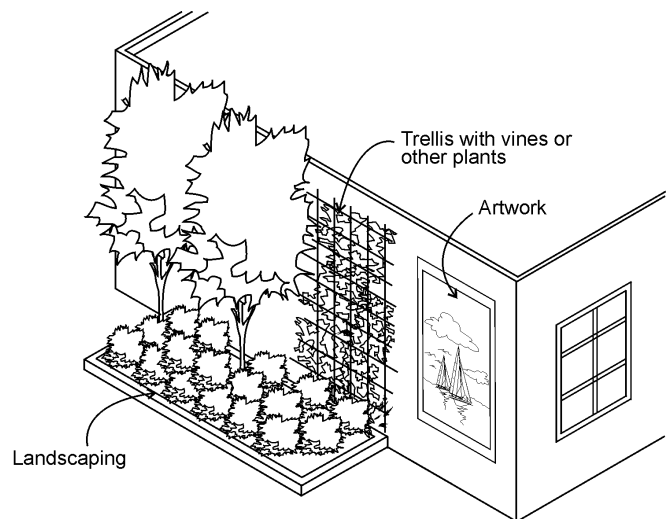


Figure 2-30. Acceptable blank wall treatments.



Figure 2-31. An example of a blank wall treatment in downtown Sumner.

## 2.4 Building Details and Materials

### Intent

- ◆ Encourage the incorporation of creative design details and small scale elements into building facades are attractive at a pedestrian scale and add visual interest.
- ◆ Encourage high quality building materials that will promote the character and identity of Sumner.
- ◆ Discourage the use of materials that are not compatible with the character of Sumner.
- ◆ Encourage the use of building colors compatible with the established historical character of Sumner.

### Guidelines

**2.4.1 Building details.** All buildings shall be enhanced with appropriate details. All new buildings are encouraged to employ at least one detail element from each of the three categories below. Other mixtures of detail elements will be considered. The applicant must demonstrate how the amount, type, and mix of details meet the intent of the guidelines. For example, a large building with multiple storefronts will likely need more than one decorative sign, one transom window, and one decorative kick-plate to meet the intent of the guidelines.

a) Window and/or entry treatment

- i) Display windows divided into a grid of multiple panes
- ii) Transom windows
- iii) Roll-up windows/doors
- iv) Other distinctive window treatment that meets the intent of the guidelines.
- v) Recessed entry
- vi) Decorative door
- vii) Arcade
- viii) Landscaped trellises or other decorative element that incorporates landscaping near the building entry
- ix) Other decorative entry treatment that meets the intent of the guidelines.

b) Decorative facade attachments

- i) Decorative weather protections element such as a steel canopy, decorative cloth awning, or retractable awning
- ii) Decorative, custom hanging sign(s)
- iii) Decorative building-mounted light fixtures

c) Building materials and other facade elements

- i) Decorative building materials/use of building materials. Examples include decorative use of brick, tile, or stonework.
- ii) Decorative *artwork* on building (such as a mural) or bas-relief sculpture

- iii) Decorative kick-plate, pier, beltcourse, design
- iv) Other details that meet the intent of the guidelines as determined by the Director and as recommended by the Design Commission.

Decorative elements referenced above must be distinct “one-of-a-kind” elements or unusual designs that require a high level of craftsmanship as determined by the Director.



*Figure 2-32. This building would meet the details guideline by using a decorative entry element, building materials, and lighting.*

**2.4.2 Building materials.** Building exteriors should be constructed from high quality, durable materials. Building materials such as concrete, masonry, tile, stone, and wood are encouraged.

**2.4.3 Prohibited materials.** The following materials are prohibited in visible locations unless an exception is granted by the Director based on the integration of the material into the overall design of the structure.

- a) Vinyl or plywood siding (including T-111 or similar plywood).
- b) Highly tinted or mirrored glass (except stained glass), except when used as an accent design element covering less than approximately 10 percent of the building facade.
- c) Corrugated fiberglass.
- d) Un-enhanced (e.g. galvanized, non-trimmed, non-vinyl) chain link fencing (except for temporary purposes such as a construction site or as a gate for a refuse enclosure).
- e) Crushed colored rock/crushed tumbled glass.
- f) Non-corrugated and highly reflective sheet metal.

**2.4.4 Special standards for concrete block.** Special standards for concrete or concrete blocks (concrete masonry units, CMU, or “cinder blocks”): When used for walls that are visible from a street, public park or open space, or pedestrian route, concrete or concrete block construction shall be architecturally treated in one or more of following ways:



- a) Use a combination of textured surfaces such as split face or grooved to create distinct banding or other design.
- b) Use of other masonry types such as brick, glass block, or tile in conjunction with the concrete or concrete blocks.
- c) Use of decorative coursing to break up *blank wall* areas.
- d) Use matching colored mortar where color is an element of architectural treatment for any of the options above.



Figure 2-33. An example of concrete block effectively used with EIFS (see Guideline 2.4.6 below) and metal awnings.

**2.4.5 Special standards for metal siding.** When used for walls that are visible from a street, public park or open space, or pedestrian route, buildings shall have visible corner moldings and trim and incorporate masonry, stone, or other durable permanent material within 2 feet of the ground level. Facades wider than 40 feet that employ metal siding shall incorporate multiple colors / other siding materials.



Figure 2-34. This building features metal siding with visible corner trim and concrete block closer to the ground level.



- 2.4.6 Special standards for Exterior Insulation and Finish System (EIFS) and other similar troweled finishes.** EIFS and other similar troweled finishes (including Exterior Insulation and Finish system or “EIFS”) must be trimmed in wood or masonry and should be sheltered from extreme weather by roof overhangs or other methods and are limited to no more than approximately 1/3 of the facade area. Weather exposed horizontal surfaces must be avoided. Masonry, stone, or other durable permanent material is required for the first 2 feet above ground level.
- 2.4.7 Year of construction.** The year of construction of a building shall be noted by the installation of a permanent cast metal plaque attached to the building. Stone or masonry set integral with other masonry on the front building elevation facing the principal street may be used in lieu of a cast metal plaque. The year of construction is to be noted by numbers not less than six inches high. Other information associated with the building that may have historic interest in the future may be included.
- 2.4.8 Color Palette.** A storefront’s palette should be no more than three colors; one base color, one trim color, and one accent color. Encourage trim and accent colors that contrast with the base color. Specifically, darker base colors with white trim work particularly well. However, lighter base colors can effectively be combined with dark trim colors. An attempt should be made to choose colors that are compatible with surrounding buildings.

## 2.5 Streetscape and Landscaping

### Intent

- ◆ Enhance the small town character of downtown Sumner.
- ◆ Improve the pedestrian environment by making it easier, safer and more comfortable to walk throughout the Commercial Districts.
- ◆ Provide signs which are pedestrian in scale and located so as to be legible to pedestrians on the sidewalks.
- ◆ Reduce conflicts between pedestrians and automobiles.
- ◆ Support the Urban Design Concept Plan for the City of Sumner public improvements.

### Guidelines

#### 2.5.1 Sidewalk widths and uses.

- a) New buildings intended for ground floor restaurant or other similar uses that may desire outdoor dining or seating opportunities are encouraged to setback storefronts to provide for wider sidewalks. For example, 12-foot sidewalks allow for very limited outdoor dining/sitting opportunities, while 15-foot sidewalks provide a more desirable configuration for outdoor dining. Also see SMC 12.28.100 and 18.16.080(O) for related standards.



Figure 2-35. Wider sidewalks provide opportunities for a greater range of pedestrian activities.

- b) Sidewalks shall not be enclosed as building space for retailing. Outdoor dining and small, temporary displays for items such as groceries, hardware, books, etc. may be allowed provided they do not impede pedestrians passing comfortably on the sidewalk. Also see SMC 12.28.080 for related provisions.

- 2.5.2 **Streetscape amenities.** Pedestrian amenities must be included along Main Street within the East Main Street Planning Area and Fryer/Traffic Avenue within the Town Center Plan Area. Specifically, one or more of the desired amenities listed below must be included for each 60 lineal feet (on average) of street frontage. The type, location, and design of chosen amenities must contribute to a well-balanced mix of features on the

street, as determined by the Director. Developments with greater than 120 linear feet of frontage shall include at least one amenity from Category II below. Desired amenities include:

### Category I:

- a) Pedestrian furniture, such as seating space, approved trash receptacles, and consolidated newspaper racks, and drinking fountains (each piece of furniture may count as an amenity element). The design of such furniture should be compatible, durable, and located to minimize impacts to pedestrian movement on the sidewalk. Seating areas and trash receptacles are particularly important where there is expected to be a concentration of pedestrian activity (such as near major building entrances and transit stops) and may be required by the Director. Low walls or planter edges to be used for seating should be at least 12 inches wide to function successfully. Seating can be incorporated into parking lot screening walls, building foundations or be free-standing planters or benches.
- b) Pedestrian furniture, such as approved trash receptacles, consolidated newspaper racks, bicycle racks, and drinking fountains.
- c) Planting beds, hanging flower baskets, and/or large semi-permanent potted plants, and/or other permanent planting elements;
- d) Decorative pavement patterns and tree grates;



Figure 2-36. Examples of Category I streetscape pedestrian amenities.

### Category II:

- a) Drinking fountain.
- b) Ground-mounted Pedestrian-scaled lighting (placed between 12 and 14 feet above the ground) as approved by the Director.
- c) Informational kiosks.
- d) Transit shelters.
- e) Decorative clocks.
- f) *Artwork* such as sculptures, installations, or other *artwork* incorporated into sidewalk.
- g) Other amenities that meet the intent.

Features above that are publicly funded, already required by code, and/or obstruct pedestrian movement (at least 8 feet of unobstructed horizontal clearance is required on all sidewalks) will not qualify as an amenity to meet this guideline.



Figure 2-37. Examples of Category II streetscape pedestrian amenities.

**2.5.3 Bicycle Rack Location.** New developments are to provide bicycle parking per SMC 18.42.085. These bicycle racks should be placed close to major entrances in visible and well lit areas on private property.

**2.5.4 Site Lighting.** Provide adequate lighting levels in all areas used by pedestrians or automobiles, including building entries, walkways, parking areas, circulation areas, and other open space areas.

New developments shall provide site lighting that meets the following design criteria through implementing measures such as:

- a) All public areas shall be lighted with average minimum and maximum levels as follows:



- i) Minimum (for low or non-pedestrian and vehicular traffic areas) of 0.5 foot candles;
  - ii) Moderate (for moderate or high volume pedestrian areas) of 1-2 foot candles; and
  - iii) Maximum (for high volume pedestrian areas and building entries) of 4 foot candles.
- b) Lighting shall be provided at consistent levels, with gradual transitions between maximum and minimum levels of lighting and between lit areas and unlit areas. Highly contrasting pools of light and dark areas shall be avoided.
- c) Parking lot lighting fixtures shall be non-glare and mounted no more than 25 feet above the ground, with lower fixtures preferable so as to maintain a *human scale*. Requests for higher lighting fixtures may be considered with the approval of the Director. All fixtures over 15 feet in height shall be fitted with a full cut-off shield.
- d) Pedestrian-scaled lighting (light fixtures no taller than 15 feet) is encouraged in areas of pedestrian activity. Lighting shall enable pedestrians to identify a face 45 feet away in order to promote safety.
- e) Lighting should not be permitted to trespass onto adjacent private parcels nor shall light source (luminaire) be visible at the property line. All building lights shall be directed onto the building itself and/or the ground immediately adjacent to it. The light emissions should not be visible above the roofline of the building. Light fixtures other than traditional cobra heads are encouraged.

### 2.5.5 Landscaping. Developments are subject to SMC Chapter 18.41 requirements.

- a) *Green roofs* may be used to meet up to 50 percent of required landscaped area. Such roofs shall have a substrate depth of at least 4 inches designed to accommodate a variety of hardy, drought-resistant plant species.
- b) Permeable pavements may count for up to 30 percent of the required landscaped areas based on the level of permeability and long term maintenance capabilities as determined by the Director.



Figure 2-38. Green roof example.

**2.5.6 Side and rear yard buffer requirements.** All developments shall incorporate one or more of the following design options:

- a) Provide *Landscaping Type A* at least 10 feet deep along side and rear property lines where adjacent to residential zoned land.
- b) Provide *Landscaping Type B or C* at least 10 feet deep along side and rear property lines where a visual separation of uses is desired. The width of the planting strip may be reduced to 5 feet if used in conjunction with a screen fence approximately 6 feet tall.
- c) Other treatments that meet the intent of the guidelines as approved by the Director. Factors that must be considered in determining the appropriate treatment include views, applicable uses, connectivity, and desired level of privacy. Some options include:
  - i) Shared pathway along or adjacent to the property line with landscaping. This is a desirable configuration that can enhance pedestrian circulation and provides an efficient use of space. This treatment requires a recorded agreement with applicable adjacent property owner(s).
  - ii) Tall privacy fence or hedge (up to 6 feet tall). This is most applicable for commercial uses adjacent to multifamily uses – where the fence doesn’t negatively impact views from the street or nearby properties.
  - iii) Low screen fence or hedge (up to 3 feet tall). This may be a more attractive option where a taller fence might provide negative visual impacts.
  - iv) Where allowed in the specific zoning district, buildings sited up to the property line may be acceptable provided design treatments are included to meet Guideline 2.4.7 (Blank Walls).

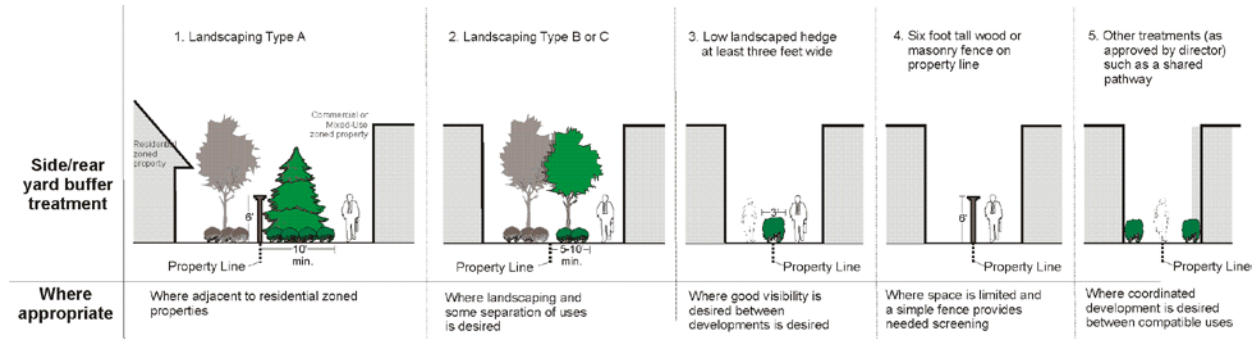


Figure 2-39. Side and rear yard design treatment options.





# 3. Multifamily Design Guidelines

---

## Contents

3. Multifamily Design Guidelines.....	1
3.1 Duplexes.....	2
3.2 Cottage Housing .....	4
3.3 Townhouse Guidelines .....	9
3.4 Apartment Guidelines .....	14
3.5 Site Design and Parking .....	20
3.6 Pedestrian Access and Amenities.....	28
3.7 Building Design.....	34
3.8 Building Details and Materials.....	37
3.9 Landscaping and Screening.....	41

## Introduction

### Applicability

These guidelines apply to all new *multifamily* and cottage developments in the City. This includes any building containing three or more dwelling units and mixed-use buildings featuring commercial and at least one dwelling unit. For mixed-use buildings featuring ground floor commercial uses, the development must comply with applicable site planning, pedestrian access, building design, and streetscape guidelines for applicable CBD or Commercial Design Guidelines (depending on location), as determined by the Director. Residential portions of the site and building will need to comply with open space and building design guidelines of the Multifamily Design Guidelines. While multi-family complexes may adopt a wide variety of neighborhood types, at their perimeter they should harmonize with the surrounding neighborhood type through both site planning and architectural techniques.

### Relationship to Sumner Municipal Code (SMC)

These guidelines shall serve as a supplement to the standards of SMC. Where there is a conflict between the guidelines herein and the standards in SMC, these guidelines shall apply.

## 3.1 Duplexes

### Applicability

These guidelines apply to all duplexes in any applicable zone within the City.

Duplexes are also subject to Chapter 3.4 of the Multifamily Design Guidelines (Pedestrian Access and Amenities) and Chapter 4.4 of the Single-Family Design Guidelines (Building Design) unless otherwise noted. Where there is a conflict between these guidelines and guidelines in other chapters, these Duplex Guidelines shall apply.

### Intent

- ◆ To ensure that duplexes are pedestrian friendly and contribute to the character the surrounding neighborhood.

### Guidelines

- 3.1.1 SMC zoning standards for duplexes.** Duplexes are subject to the provisions of SMC Title 18. Figure 3-1 below illustrates key dimensional standards for duplexes.
- 3.1.2 Covered entry.** Duplexes shall provide separate covered entries for each dwelling unit with a minimum dimension of 4 feet by 6 feet. Exceptions may be granted by the Director for the use of regional housing styles that do not traditionally contain such entries.
- 3.1.3 Windows on the street.** All duplexes must provide transparent windows and/or doors on at least 15 percent of the facade (this includes any upper levels, if applicable).
- 3.1.4 Garage design standards for duplexes.**
- a) Garages fronting the street shall be setback a minimum of 20 feet.
  - b) The garage face or side wall shall occupy no more than 50 percent of the ground-level facade facing the street.
  - c) Where the garage faces the side yard, but is visible from the street, the garage shall incorporate a window on the streetfront facade so that it appears to be a habitable portion of the house. The window size and design must be compatible with the windows on habitable portions of the house.
- 3.1.5 Corner duplexes.** Duplexes located on corner lots shall be designed with pedestrian entries located on opposite street frontages so that the structure appears to be a single-family dwelling. Where no alley is available for vehicular access, separate driveways for each unit may be placed on opposite streets.

- 3.1.6 Through lots.** Duplexes located on through lots shall be designed with pedestrian entries located on opposite street frontages so that the structure appears to be a single-family dwelling.

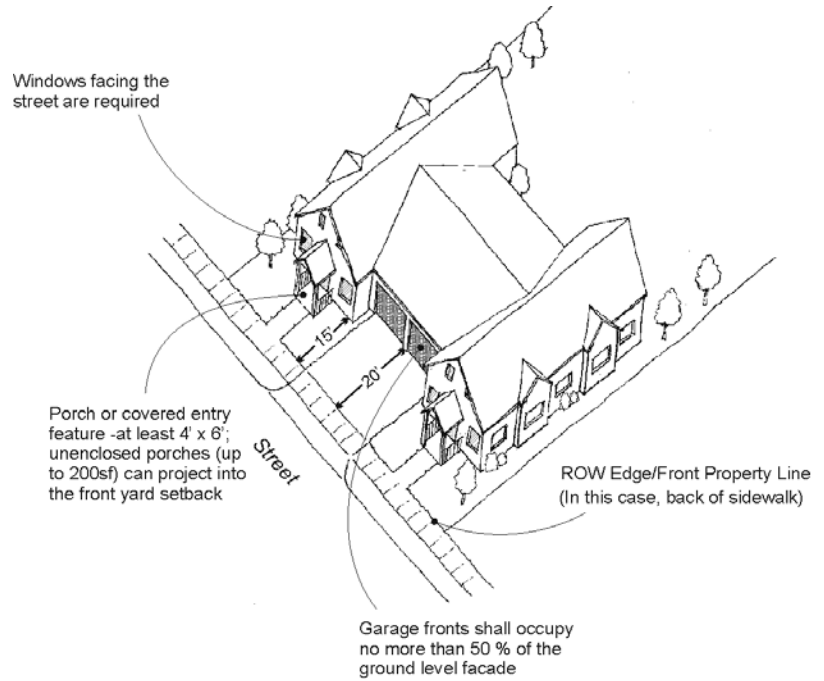


Figure 3-1. Design requirements for duplexes with front loaded access.

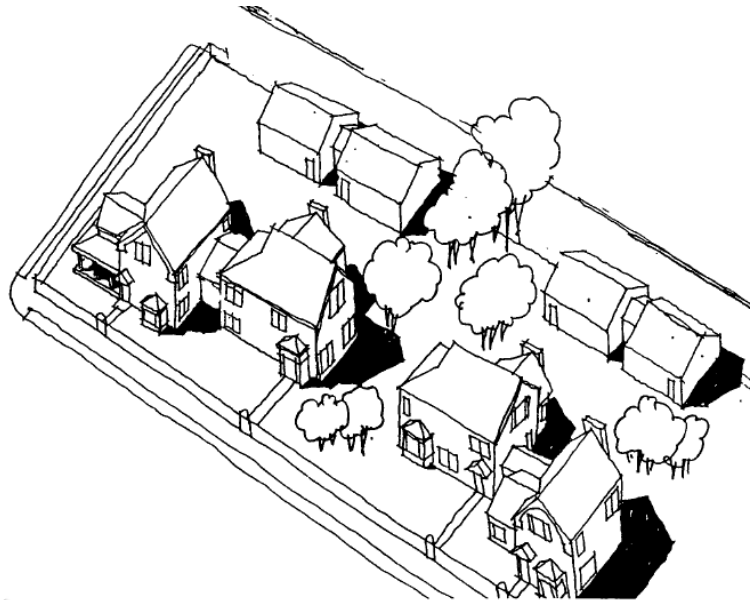


Figure 3-2. Duplex examples with alley access.

## 3.2 Cottage Housing

### Applicability

These guidelines apply to all cottage developments in any applicable zone within the City.

Cottages are subject to Chapter 3.5 of the Multifamily Design Guidelines (Pedestrian Access and Amenities) and Chapter 4.4 of the Single-Family Design Guidelines (Building Design) unless otherwise noted. Where there is a conflict between these guidelines and guidelines in other chapters, these Cottage Housing guidelines shall apply.

### Intent

- ◆ To provide a housing type that responds to changing household sizes and ages (e.g., retirees, small families, single person households).
- ◆ To encourage creation of more usable open space for residents of the development through flexibility in density and lot standards.
- ◆ To ensure that the overall size, including bulk and mass of cottage structures and cottage housing developments, remain smaller and incur less visual impact than standard sized single-family dwellings, particularly given the allowed intensity of cottage dwellings.
- ◆ To provide centrally located and functional common open space that fosters a sense of community and a sense of openness in cottage housing developments.
- ◆ To provide private area around the individual dwellings to enable diversity in landscape design and foster a sense of ownership.
- ◆ To ensure minimal visual impact from vehicular use and storage areas for residents of the cottage housing development as well as adjacent properties, and to maintain a single-family character along public streets.

### Guidelines

3.2.1 Dimensional standards for cottage housing. See Table 3-1.

**Table 3-1. Dimensional Standards for Cottage Housing**

Standard	Requirement
Average Gross Floor Area	900 square feet per dwelling (approximate)
Maximum Gross Floor Area	1100 square feet per dwelling
Minimum Gross Floor Area	700 square feet per dwelling
Maximum Gross Floor Area/Ground or Main Floor	800 square feet per dwelling
Minimum Common Space	400 square feet per dwelling (See paragraph (a) below)
Minimum Private Open Space	200 square feet per dwelling (See paragraph (b) below)
Maximum Height	18 feet
Setbacks (to exterior property lines)	Front Yard: 5 Interior Side Yard: 5 Street Side Yard: 5 Rear Yard: 5
Minimum Distance Separating Structures (Including accessory structures)	40 7.5 feet
Minimum roof slope of all structures	5:12
Minimum Parking Spaces	1.75 spaces per dwelling
Clustering Groups	Developments shall contain a minimum of 4 and a maximum of 12 dwellings located in a cluster group to encourage a sense of community among the residents. A development site may contain more than one group.

**3.2.2 Cottage open space design standards:**

- a) Common open space requirements for cottage developments:
  - i) Shall abut at least 50 percent of the cottages in a cottage housing development.
  - ii) Shall have cottages abutting on at least two sides of the common open space.
  - iii) Cottages shall be oriented around and have an entry facing the common open space.
  - iv) Cottages shall be within 60 feet walking distance of the common open space.
  - v) Shall be at least 20 feet in width.
  - vi) Shall be designed and maintained as an amenity for residents of the development.
- b) Required private open space for cottage dwelling units shall be adjacent to each dwelling unit and for the exclusive use of the cottage resident(s). The private space shall be:



- i) Usable (not on a steep slope).
- ii) Oriented toward the common open space as much as possible.
- iii) Minimum depth of 10 feet as measured from the cottage.


Alternative open space configurations may be permitted by the Director provided they provide a hierarchy of usable semi-private and public open spaces that meet the intent of the guidelines.

### **3.2.3 Porches and covered entry standards for cottages:**

- a) Cottage facades facing the common open space or common pathway shall feature a roofed porch at least eighty square feet in size with a minimum dimension of eight feet on any side, unless the cottage fronts on the street then the front porch should face the street. Porch railings are required.
- b) Cottages located adjacent to a public street shall also provide a covered entry feature facing the street per 4.4.2.

### **3.2.4 Cottage parking standards:**

- a) Located on the same property as the cottage development.
- b) Screened from public streets and adjacent residential uses by landscaping or architectural screening.
- c) Located in clusters of not more than five adjoining spaces (except where parking areas are adjacent to an alley).
- d) Prohibited in front and interior yard setback areas.
- e) A pitched roof design is required for all detached parking structures.
- f) Garages may be attached to individual cottages provided all other design standards have been met and the footprint of the ground floor, including the garage, does not exceed 1,000 square feet. Such garages shall be located away from common open spaces to the extent possible.

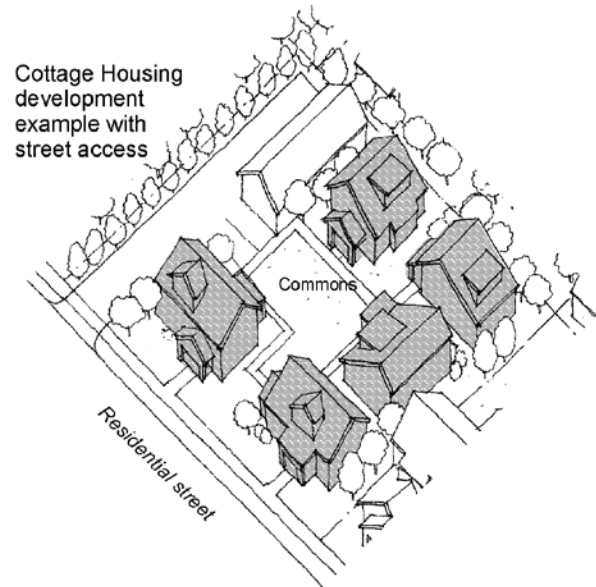

*Figure 3-3. Cottage housing development example. Note the configuration of units surrounding a common open space, with vehicular access and garages off the side.*



*Figure 3-4. Cottages surrounding common open space.*



*Figure 3-5. An example of a cottage development on a narrow lot.*

## 3.3 Townhouse Guidelines

### Applicability

These guidelines apply to buildings containing two or more ground-related dwelling units that are attached horizontally and contain individual building entries to the outside. Each unit is separated from any other unit by one or more vertical common fire-resistant walls. Townhouses are often also called “Row Houses.”

Townhouses are subject to other Multifamily Design Guidelines in Chapters 3.5 through 3.9 unless otherwise noted. Where there is a conflict between these guidelines and other Multifamily Design Guidelines in this chapter, these Townhouse Guidelines shall apply.

### Intent

- ◆ To ensure that townhouse developments enhance the character of the street.
- ◆ To provide adequate private and common open space for townhouse developments.
- ◆ To reduce the impact of garages and driveways on the pedestrian environment.
- ◆ To reduce the apparent bulk and scale of townhouse buildings.
- ◆ To promote architectural variety that adds visual interest to the neighborhood.



*Figure 3-6. Desirable townhouse example. Units front on the street. Garages are off the alley.*

## Guidelines

### 3.3.1 Dimensional standards for townhouses. See Table 3-2 below.

**Table 3-2: Dimensional Standards for Townhouses.**

Standard	Requirement ( <i>Rationale/Discussion</i> )
<b>Maximum Lot Coverage</b>	None.
<b>Impervious Area</b>	See Public Work Standards.
<b>Maximum number of units in one building</b>	6 unless otherwise noted in particular zoning district.
<b>Minimum Private Open Space</b>	200SF attached and accessible from each unit. This may include landscaped front and/or rear yards, porches, patios, and balconies. Driveways and minimum required landscape buffers may not be included in the calculations. Up to 50% of the required private open space can be provided as additional common open space (beyond minimum requirements specified below).
<b>Minimum Common Open Space</b> (See Guidelines 3.2.2 and 3.2.3 for detailed common open space requirements and guidelines)	100 square feet/dwelling unit for developments with more than 10 dwelling units.
<b>Maximum Height</b>	SEE STANDARDS FOR PARTICULAR ZONING DISTRICT
<b>Minimum Setback from a Public Street</b>	10 feet for building 5 feet for porch/stoop
<b>Side Yard</b> (setback to exterior property line for development)	0 feet for connected structures 5 feet for end units 10 feet for street side yards
<b>Rear Yard</b> (setback to exterior property line for development)	10 feet

### 3.3.2 Design standards unique to Townhouses:

- Townhouses may depart from lot size and width standards set forth in SMC 18.14.070 provided they do not exceed applicable density standards.
- Townhouses fronting on a street must all have individual ground-related entries accessible from the street. Configurations where enclosed rear yards back up to a street are prohibited. The Director may allow exceptions to these rules depending on the nature of the site and where design treatments have been included to enhance the character of the street. Such departure must meet the intent of the guidelines and goals and objectives of the Comprehensive Plan in terms of desired character of the area and pedestrian access.

- c) Emphasize pedestrian entries: New developments must give greater emphasize to individual pedestrian entrances rather than private garages to the extent possible by using both of the following measures:
  - i) Enhance entries with a trellis, small porch, or other architectural features that provides cover for a person entering the unit and a transitional space between outside and inside the dwelling.
  - ii) Provide a planted area in front of each pedestrian entry of at least 20 square feet in area, with no dimension less than 4 feet. Provide a combination of shrubs or groundcover and a street tree (refer to city arborist or street tree list if available).
- d) Garage configuration: For any townhouse configuration where the primary pedestrian access is off of the same facade as vehicular access, developments shall incorporate single-width parking configurations for at least 50 percent of the units. This will minimize the impact of garage doors on the pedestrian environment. The Director may grant departures to this provision provided design treatments effectively minimize the impacts of garage doors on the pedestrian environment.



*Figure 3-7. Good and bad examples of garage/entry configurations. The left example features a landscaped area and a trellis to highlight the entry. In the middle image, the balconies and landscaped areas deemphasize the garage. In the right image, the lack of landscaping is a glaring omission.*

- e) Landscaped alleys: For development configurations where the townhouse units have their primary pedestrian entry off of a street or a common open space and garages are served off of an alley, the alleys shall include one of the following landscaping elements:
  - i) Provide a planted area between each individual garage at least 20 square feet in area, with no dimension less than 4 feet. Provide a combination of shrubs or groundcover and a street tree (refer to city arborist or street tree list if available).
  - ii) Cluster planting area and trees adjacent to or along the alley area provided there is an average of one tree and at least 20 square feet of landscaped area per individual garage.
  - iii) Other landscaping treatments that meet the intent of the guidelines as approved by the Director and as recommended by the Design Commission.





Figure 3-8. A well-landscaped alley

- e) Driveways on private internal streets. Where townhouse units are served by private internal streets, developments are encouraged to limit the depth of driveways between the streets and the garage wall to deemphasize vehicular access. Driveway depths of 5-10 feet are appropriate to allow the maneuverability and provide space to include the required landscaping and entry elements for each unit. The shallow width also prohibits residents from parking cars in their driveways. By default, this encourages residents to keep their vehicles in their garage. Additional surface parking spots should be scattered around the development to provide space for guests.
- f) Building *articulation*. Townhouse buildings shall be articulated to emphasize individual units, per Guideline 3.7.1.
- g) Repetition with Variety: Townhouse developments shall employ one or more of the following “repetition with variety” guidelines:
  - i) Reversing the elevation of two out of four dwellings for townhouses.
  - ii) Providing different building elevations for external townhouse units (versus internal units) by changing the roofline, *articulation*, windows, and/or building *modulation* patterns (see Figure 3-9).
  - iii) Adding a different dwelling design or different scale of the same design, where a one-story version of the basic dwelling design where two stories are typical (or a two story design where three stories are typical).
  - iv) Other design treatments that add variety and provide special visual interest. While the variable use of color on buildings can be effective in reducing the perceived scale of the building and adding visual interest, color changes alone are not sufficient to meet the intent of the guidelines.

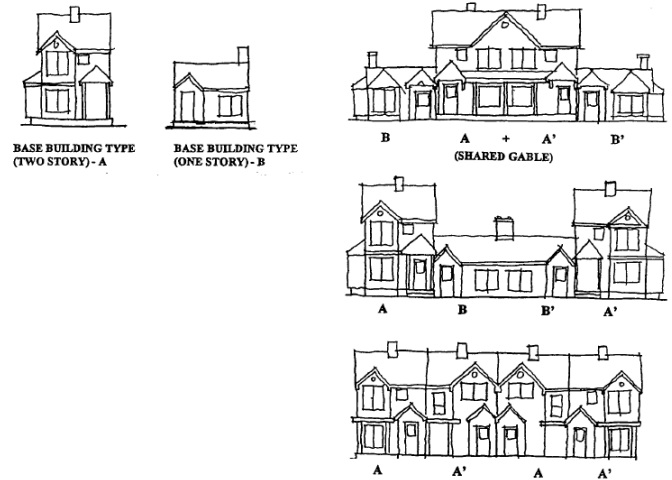


Figure 3-9. Acceptable townhouse configuration employing the repetition with variety concept.



Figure 3-10. An acceptable townhouse example for Sumner. Note the varying façade treatments and colors, balconies, semi-private outdoor spaces, and street access.



Figure 3-11. Another acceptable townhouse building. Note the landscaped front yards and individual walkways and entries. The internal units each have distinct, but identical windows and roof forms. The outside unit is differentiated through the use of building materials, window design, unit size, and facade detailing.

## 3.4 Apartment Guidelines

### Applicability

These guidelines apply to buildings containing three or more dwelling units that are attached horizontally and/or vertically. Each unit is separated from any other unit by one or more horizontal and/or vertical common fire-resistant walls.

Apartments are subject to other Multifamily Design Guidelines in Chapters 3.5 through 3.9 unless otherwise noted. Where there is a conflict between these guidelines and other Multifamily Design Guidelines in this chapter, these Apartment Guidelines shall apply.

### Intent

- ◆ To ensure that apartment developments enhance the character of the streetscape.
- ◆ To provide adequate private and common open space for apartment developments.
- ◆ To reduce the automobile impacts on the pedestrian environment.
- ◆ To have the apparent bulk and scale of apartment buildings similar to existing structures in the neighborhood.
- ◆ To promote architectural diversity, variety and creativity that adds visual interest to the neighborhood through unique design and building type.



*Figure 3-12. Desirable apartment examples. Units front on the street. Garages, carports, and head in parking are off the alley.*

## Guidelines

### 3.4.1 Dimensional standards for apartments. See Table 3-3 below.

**Table 3-3: Dimensional Standards for Apartments.**

Standard	Requirement ( <i>Rationale/Discussion</i> )
<b>Private Open Space</b>	Minimum Private Open Space: 50 square feet/unit. Private usable open space must be attached and accessible from the dwelling. This may include porches, patios, and balconies. Private open space may be counted toward up to 20 - 30% of the minimum common open space required.
<b>Common Open Space</b> (See Guidelines 3.2.2 and 3.2.3 for detailed common open space requirements and guidelines)	Minimum Common Open Space: 200 square feet/unit. <b>All space in the development must be pedestrian oriented. Common open space must have perceived tenant ownership, promoted with such amenities as gathering areas, community gardens, park spaces, big toys, picnic areas, etc. Common open space shall not interfere with private space of tenants and contain at least one of the following:</b> <ul style="list-style-type: none"> <li>• Fountain, furniture, art, gardens or other as approved by the Design Commission.</li> <li>• Driveways and minimum required landscape buffers may not be included in the calculations. (add landscaping from other version)</li> </ul>
<b>Maximum Height</b>	50 feet
<b>Minimum Setback from a Public Street</b>	0 feet
<b>Side Yard</b> (setback to exterior property line for development)	25' when adjacent to LDR and 15' for all other zones
<b>Rear Yard</b> (setback to exterior property line for development)	25' when adjacent to LDR and 15' for all other zones
<b>Density</b>	Limited by height, parking and open space requirements.

### 3.4.2 Design standards unique to Apartments:

- Apartments may depart from lot size, width and density standards set forth in SMC 18.14.070 provided they meet all open space and parking standards.
- Ground floor units and apartments fronting on a public or private street must have entries accessible from that street. Internal or architecturally screened stairwells are highly encouraged. Configurations where enclosed rear yards back up to a street are prohibited. The Director may allow exceptions to these rules depending on the nature of the site and where design treatments have been included to enhance the character of the street. Such departure must meet the intent of the guidelines and goals and



objectives of the Comprehensive Plan in terms of desired character of the area and pedestrian access.


- c) Emphasize pedestrian entries: Developments must give greater emphasize to pedestrian entrances rather than parking lots or garages to the extent possible by using both of the following measures:
  - i) Enhance entries with a variety of architectural features that provides cover for a person entering the unit and a transitional space between outside and inside the dwelling.
  - ii) Provide a planted area in front of each building entry of at least 20 square feet in area, with no dimension less than 4 feet. Provide a combination of shrubs or groundcover and a street tree (refer to city arborist or street tree list if available).



- d) Parking configuration: Carport configuration: For any configuration where the primary access is off of the same facade as vehicular access, carports may be allowed adjacent to an apartment building if integrally designed to the main structure. Lighted carports are encouraged.





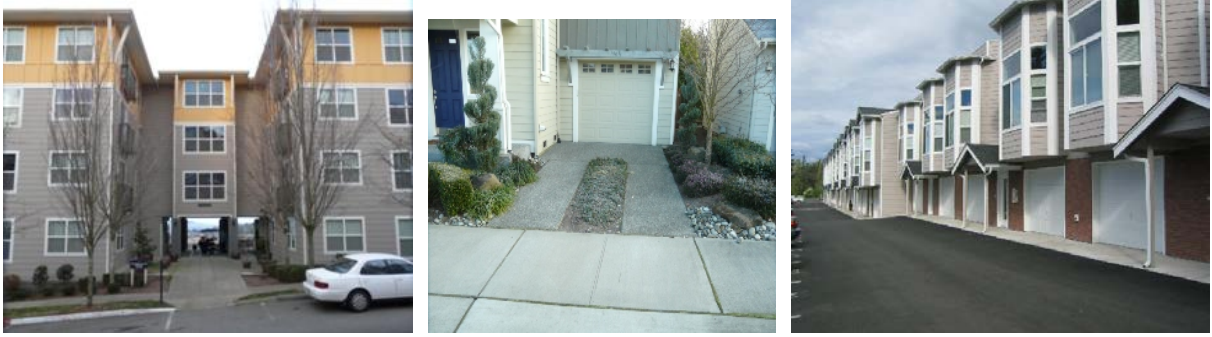

*Figure 3-14. Good and bad examples of garage/entry configurations. The left example features a courtyard area and benches to highlight the entry. In the middle image, the increased setback and landscaped areas deemphasize the garage. In the right image, the lack of landscaping is a glaring omission.*

- e) Storage units: are allowed as accessory structures and shall be located to the side or rear of the buildings and shall be screened from adjacent properties.
- f) Landscaped alleys and side streets: For units where parking areas are served off of an alley or side street, the alleys or side street shall include one of the following landscaping elements:
  - i) Provide a planted area between each individual parking areas at least 20 square feet in area, with no dimension less than 4 feet. Provide a combination of shrubs or groundcover and a street tree (refer to city arborist or street tree list if available).
  - ii) Cluster planting area and trees adjacent to or along the alley area provided there is an average of one tree and at least 20 square feet of landscaped area per individual garage.
  - iii) Other landscaping treatments that meet the intent of the guidelines as approved by the Director and as recommended by the Design Commission.



*Figure 3-14. A well-landscaped alley*

- g) Private internal streets. Private internal streets are necessary access to parking areas and shall be posted as “No Parking” areas, except as designated.
- h) Building *articulation*. Apartment buildings shall be articulated per Guideline 3.7.1.

- i) Repetition with Variety: Apartment structures shall employ the following guidelines:
  - i) More than one elevation is required for multiple-structure developments, by changing the roofline, *articulation*, windows, and/or building *modulation* patterns (see Figure 3-15).
  - ii) Other design treatments that add variety and provide special visual interest. While the variable use of color on buildings can be effective in reducing the perceived scale of the building and adding visual interest, color changes alone are not sufficient to meet the intent of the guidelines.



Figure 3-15. Acceptable apartment configuration employing the repetition with variety concept.





*Figure 3-16. Other acceptable apartment examples for Sumner. Note the varying façade treatments and colors, balconies, semi-private outdoor spaces, and street access. Also, note the landscaped front yards and individual walkways and entries. The internal units each have distinct, but identical windows and roof forms. The outside unit is differentiated through the use of building materials, window design, unit size, and facade detailing.*

### 3.5 Site Design and Parking

#### Intent

- ◆ To create safe and vital streets by encouraging development to enhance the street environment.
- ◆ To create new development that contributes to natural surveillance and provides for the personal safety of residents.
- ◆ To ensure that new development reinforces the existing or desired spatial characteristics of the neighborhood.

- ◆ Encourage safe and pleasant environments for pedestrians.

### Guidelines

#### 3.5.1 Building location and orientation.

- a) Pedestrian entrances facing the street shall be clearly visible from the street.
- b) Building entries facing common open space which is oriented towards the street are acceptable.
- c) Buildings shall also provide windows facing the street to provide “eyes on the street” for safety. See Guideline 3.7.2(a) for specific requirements.




*Figure 3-17. These apartments front on an arterial; parking is provided in back off an alley or in garages with access off the alley.*

**3.5.2 Front yard transitional space.** *Multifamily* buildings should incorporate a front yard transitional space between the adjacent street(s) and the building(s). This may include a landscaped front yard and/or landscaped entry court. This creates a semi-public space that divides the public space (the street) from private space (the building). This space is an important security element, particularly when views are maintained between the street and building(s).



Figure 3-18 These multi-family buildings show landscaping in the front yard transitional space between the adjacent street and the building.

**3.5.3 Surface parking location.** Parking lots shall be located to the side or rear of buildings. Parking lots may not be located adjacent to street corners.

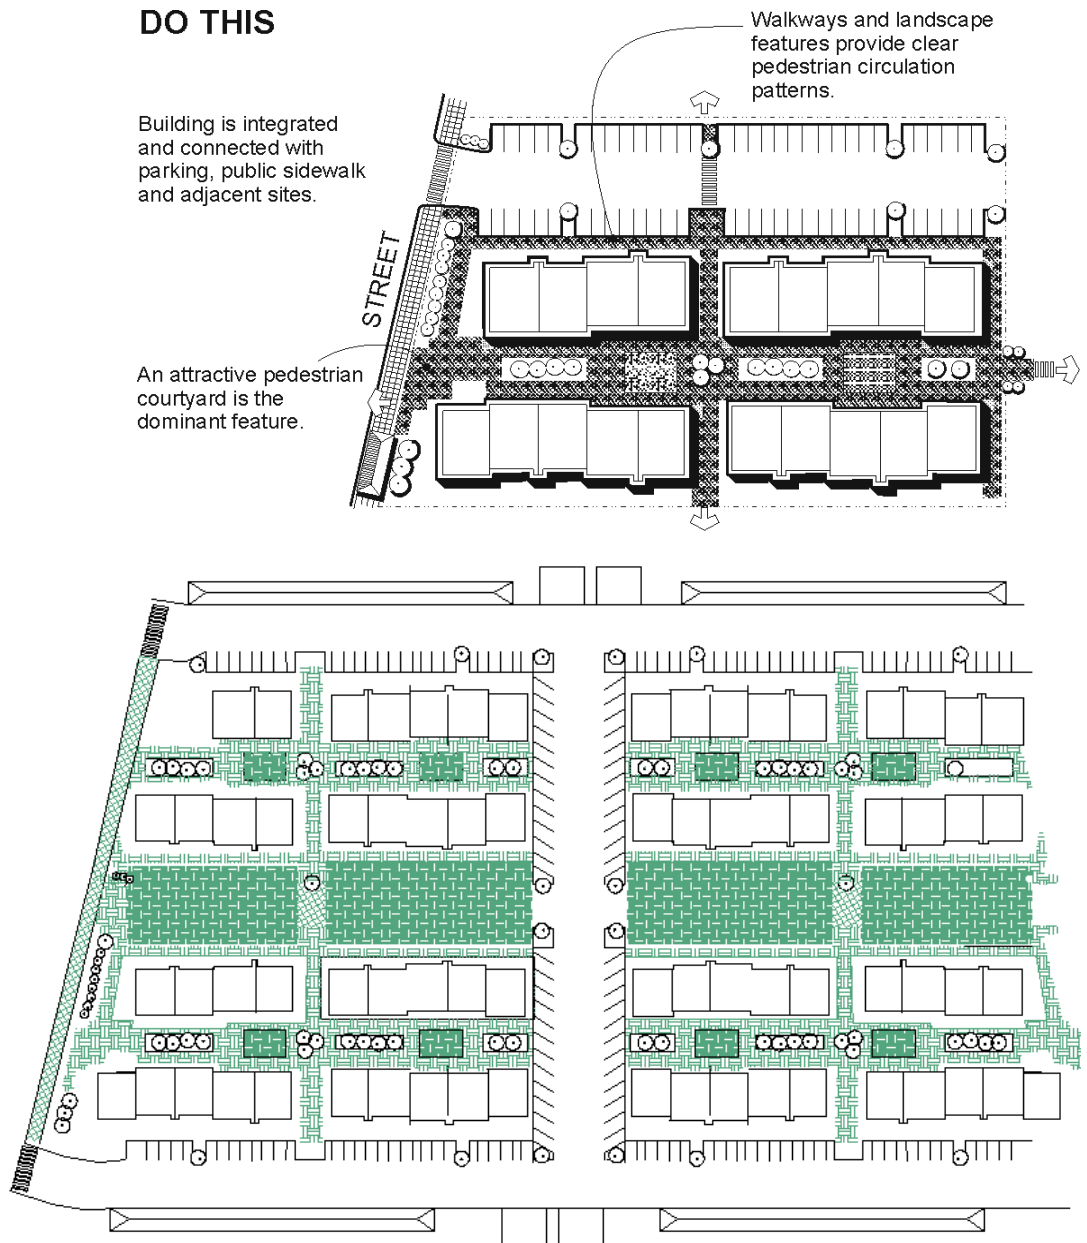

(Larger scale of above)

### DON'T DO THIS


Building is disconnected from parking, public sidewalk and adjacent sites.

No buffer zone for pedestrians between front doors and parking.

Parking is the dominant feature.

No pedestrian entrance to the building.

Pedestrian circulation patterns are unclear.

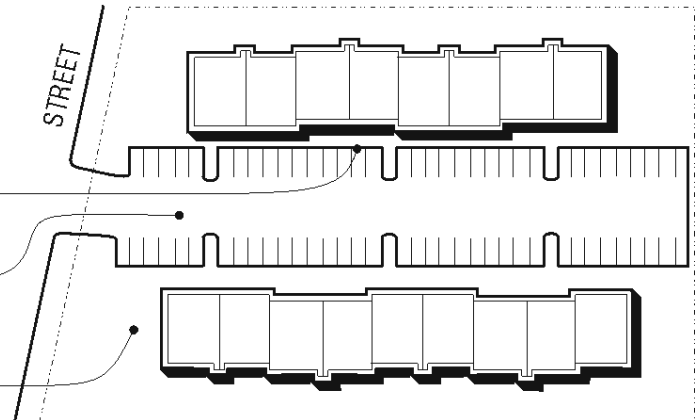

*Figure 3-19. Good and bad multifamily development configuration examples.*



- 3.5.4 Parking garage entries.** Parking garage entries must not dominate the streetscape. They should be designed and sited to complement the pedestrian entry. This applies to both public garages and any individual private garages, whether they front on a street or private interior access road.



*Figure 3-20. This parking garage is clearly visible, but doesn't negatively impact the character of the building.*

- 3.5.5 Common parking garage design guidelines.** Buildings containing above-grade structured parking shall screen such parking areas with landscaped berms, or incorporate contextual architectural elements, that complement adjacent buildings or buildings in the area, to the satisfaction of the Director. Upper level parking garages must use *articulation* or *fenestration* treatments that break up the massing of the garage and/or add visual interest.

## DON'T DO THIS



Building appears to float over parking

## DO THIS



Parking is hidden from view by screening

*Figure 3-21. Bad and good examples of in-structure parking.*

**3.5.6 Privacy and relationship to adjacent sites.** Adequate solar access and privacy for *multifamily* dwelling units and adjacent properties shall be provided along the side yard. Specific standards and guidelines:

- a) Buildings or portions thereof containing dwelling units whose solar access is only from the side of the building (facing towards the side property line) shall be set back from the property line at least 15 feet.
- b) Other designs may be considered by applicant if adequate solar access and privacy along the side yard is provided as recommended by the Design Commission and approved by the Director.

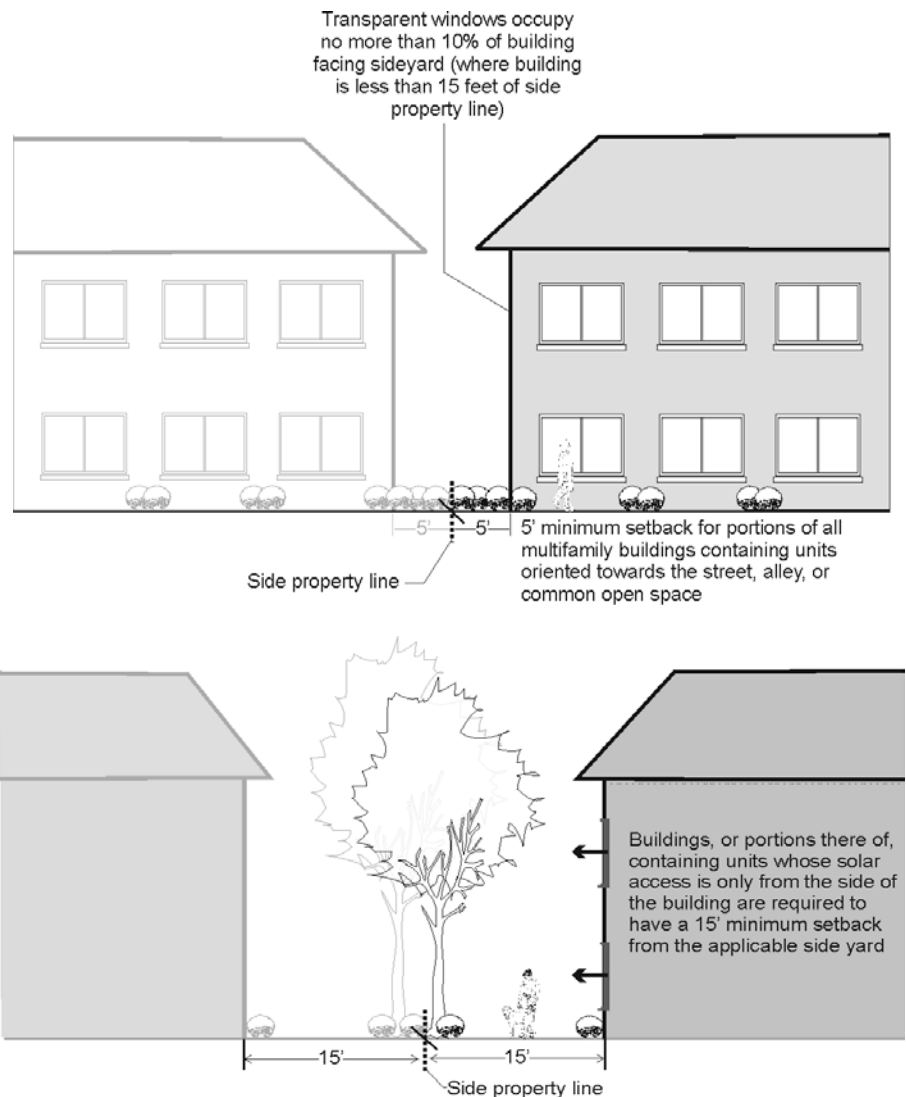


Figure 3-22. Side yard setback standards for multifamily buildings depend on their dwelling units' solar orientation.

**3.5.7 Vehicular access and connectivity.**

- a) On corner lots, the driveway(s) shall be located off of the side street (unless the side street is an arterial) and away from the street intersection to the extent possible.

- b) Sites abutting an alley shall be required to gain vehicular access from the alley.
- c) Where no alley access is available, the development shall be configured to minimize the number and width of driveways. Shared driveways are encouraged and may be required depending on the nature of the adjacent street.
- d) The shared driveway or access shall be located to one side of the lot and away from the center of the site to the maximum extent feasible.
- e) The location and design of pedestrian access from the sidewalk shall be emphasized so as to be more prominent than the vehicular access. Consider special landscaping, lighting, and architectural treatment to accomplish this.
- f) Development of large sites (more than 2 acres) may be required to provide connections to adjacent sites depending on the surrounding street network and nature of adjacent uses and zoning. Large site development shall also build main access ways to public works standards for public streets.

**3.5.8 Service, loading, and garbage areas.** Developments shall provide a designated spot for service elements (refuse and disposal). Such elements shall meet the following requirements:

- a) Service elements shall be sited off of the alley, where available. Where there is no alley, service elements shall be located to minimize the negative visual, noise, odor, and physical impacts to the street environment, adjacent (on and off-site) residents or other uses, and pedestrian areas.
- b) Service elements shall be sited and designed to provide sufficient visibility to prevent hiding places for unwanted persons.
- c) The designated spot for service elements shall be paved.
- d) Appropriate enclosure of the service elements shall be required, as determined by the planning director. Preferences and considerations:
  - i) Enclosures are particularly important for corner lots, where that portion of the alley is more visible from the adjacent street.
  - ii) Proximity to adjacent residential units will be a key factor in determining appropriate service element treatment.
  - iii) Preferably, service enclosures are integrated into the building itself.
  - iv) The design of any detached service enclosure should be compatible with the design of the primary structure or structures on the site. This could include similar building materials and/or detailing.
- e) Exterior mechanical devices shall conform to SMC 18.16.080(A) concerning noise impacts.



*Figure 3-23. Well-designed service enclosures designed compatible to be with the multifamily buildings.*

- 3.5.9 Utility meters, electrical conduit, and other service utility apparatus** shall be located and/or designed to minimize their visibility from the street. If such elements are mounted in a location visible from the street, pedestrian pathway, common open space, or shared auto courtyards, they shall be screened with vegetation or by architectural features.



*Figure 3-24. Exposed utility meters like this will not be allowed.*



*Figure 3-25. Landscaping helps to minimize the negative visual impacts of utility meters.*

## 3.6 Pedestrian Access and Amenities

### Intent

- ◆ To orient developments to the pedestrian by making pedestrian access convenient, safe, and inviting.
- ◆ To encourage walking.
- ◆ To enhance the character of multifamily developments.
- ◆ To minimize impacts to residents' privacy.
- ◆ To provide accessible, safe, convenient, and usable on-site open space for the enjoyment of residents of the development.
- ◆ To create open spaces which enhance the residential setting.

### Guidelines

**3.6.1 Internal Pedestrian Paths and Circulation.** An on-site pedestrian circulation system meeting the following standards shall be provided:

- a) Pathways between dwelling units and the street are required. Exceptions may be allowed by the Director where steep slopes prevent a direct connection or where an indirect route would enhance the design and/or use of a common open space.



*Figure 3-2. Direct pathways between the street and dwelling units are required.*

- b) The pedestrian circulation system shall connect all main entrances on the site. For townhouses or other residential units fronting on the street, the sidewalk may be used to meet this standard. For multiple-family developments, pedestrian connections to other areas of the site, such as parking areas, recreational areas, trails, common outdoor areas, adjacent pedestrian ways, and any pedestrian amenities shall be required.
- c) Elevated external walkways/stairways may be allowed only when they enhance the integrity of the architecture. We will not accept designs similar to figure 3-27.





*Acceptable*



*Unacceptable*

*Figure 3-27. Elevated external stairs and walkways must enhance the character of the building.*

- d) Appropriate screening or buffering to create a physical separation between pedestrians and vehicle access areas and the windows of residential units shall be provided. Acceptable treatments include:
- i) Landscaped beds that separate the pathway from the building facade featuring windows; and/or
  - ii) Landscaping adjacent to windows shall not impede views from dwelling units.



*[Do this]*



*[Don't do this]*

*Figure 3-28. A planting bed separates the path and driveway from a dwelling unit.*





*Figure 3-29. A combination of grade change and landscaping add privacy to these dwelling units.*

e) Materials standards for pathways:

- i) The pedestrian circulation system must be hard-surfaced and at least five feet wide. Segments of the private circulation system that provide access to no more than four residential units may be three feet wide.
- ii) Except as allowed in subparagraph (iii), below, the pedestrian circulation system shall be clearly defined and designed so as to be separated from driveways and parking/loading areas through the use of raised curbs, elevation changes, bollards, landscaping, different paving materials, and/or other similar method. Striping does not meet this requirement. If a raised path is used it must be at least four inches high and the ends of the raised portions must be equipped with curb ramps. Bollard spacing must be no further apart than five feet on center.
- iii) The pedestrian circulation system may be within an auto travel lane if pedestrian circulation system is surfaced with paving blocks, bricks, or other special paving as approved by the Director and as recommended by the Design Commission. Trees and other landscaping elements shall be integrated into the design of a shared auto/pedestrian court.

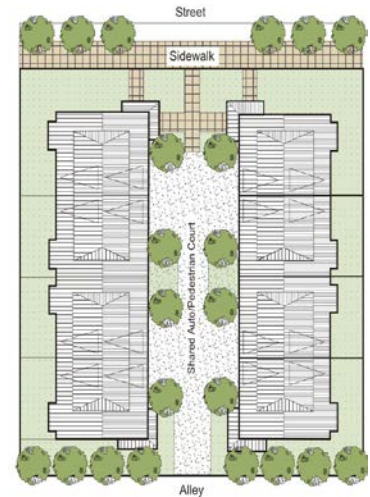


Figure 3-30. Shared auto/pedestrian access court example.

- f) Lighting. The on-site pedestrian circulation system must be ~~lighted~~ illuminated to a level where pedestrians can identify faces from a reasonable distance.

## 3.6.2 Require open space for multifamily developments.

- a) Apartments must comply with open space requirements specified in Table 3-3, Guideline 3.3.1.
- b) Townhouses must comply with open space requirements specified in Table 3-2, Guideline 3.3.1.
- c) Cottage housing must comply with open space requirements specified in Table 3-1, Guideline 3.2.1
- d) Other open space proposals meeting the intent of the open space requirements may be considered by the Design Commission and approved by the Director.

## 3.6.3 Open space types and standards:

- a) Common open space: Common open space may count for up to 100 percent of the required open space for stacked flats. This includes landscaped *courtyards* or decks, gardens with pathways, children's play areas, or other multi-purpose recreational and/or green spaces. Special requirements and recommendations for common open spaces include the following:
  - i) Required setback areas shall not count towards the open space requirement, except for spaces that meets the dimensional and design requirements and guidelines herein.
  - ii) Space under stairways, stair landings, above grade walkways, balconies and decks shall not count as common open space.
  - iii) Space shall be large enough to provide functional leisure or recreational activity. To meet this requirement, no dimension shall be less than fifteen feet in width. Alternative configurations may be considered by the Director where the applicant can successfully demonstrate that the common open space meets the intent of the standards.
  - iv) Spaces (particularly children's play areas) shall be visible from dwelling units and positioned near pedestrian activity.

- v) Spaces shall feature paths, landscaping, seating, lighting and other pedestrian amenities to make the area more functional and enjoyable.
- vi) Individual entries shall be provided onto common open space from adjacent ground floor residential units, where applicable. Small, semi-private open spaces for adjacent ground floor units that maintain visual access to the common area are strongly encouraged to enliven the space.
- vii) Common space shall be separated from ground floor windows, streets, service areas and parking lots with landscaping, low-level fencing, and/or other treatments as approved by the Director that enhance safety and privacy (both for common open space and dwelling units).
- viii) Space should be oriented to receive sunlight, facing east, west, or (preferably) south, when possible.
- ix) An atrium roof covering may be built over a *courtyard* to provide weather protection provided it does not obstruct natural light inside the *courtyard*.
- x) Raingardens may count as common open space if it is usable common open space.







*Figure 3-31. Common open space examples.*



*Figure 3-32. Balconies provide usable open space for residents.*

- b) Indoor recreational areas: Indoor recreational areas may count towards the required open space. The following conditions must be met:
- i) Indoor spaces must be located in visible areas, such as near an entrance lobby and near high traffic corridors.
  - ii) Space must be designed to provide visibility from interior pedestrian corridors. Windows should generally occupy at least one-half of the perimeter of the space (towards internal corridors or outside) to make the space inviting and encourage use.
  - iii) Space must be designed specifically to serve interior recreational functions and not merely be leftover unrentable space used to meet the open space requirement. Such space must include amenities and design elements such as swimming pools, sport

courts, etc. that will encourage use by residents as determined by the Director and as recommended by the Design Commission.

- c) Community gathering space: Community gathering space, such as mailbox kiosks or community boards, shall provide relief from the weather and provide landscaping, adequate lighting, and a bench.

## 3.7 Building Design

### Intent

- ◆ To reduce the apparent bulk and scale of large buildings.
- ◆ To enhance the pedestrian environment.
- ◆ To promote architectural variety that adds visual interest to the neighborhood.

### Guidelines

- 3.7.1 Building articulation - multifamily residential buildings and residential portions of mixed-use buildings.** All residential buildings and residential portions of mixed-use buildings shall include at least three of the following *modulation* and/or *articulation* features at intervals of no more than 30 feet along all facades facing a street, common open space, and common parking areas, unless approved by the Design Commission:
- a) Repeating distinctive window patterns at intervals less than the required interval.
  - b) Vertical building *modulation*. To qualify for this measure *modulation* shall be significant and tied to a change in color or building material and/or roofline *modulation* as defined below (Figure 3-27). Significant building modulation must have a distinct change in modulation, creativity as approved by the Design Commission like the reduction as seen in Figure 3-28. Balconies may not be used to meet *modulation* option unless they are recessed or projected from the facade and integrated with the building's architecture as determined by the Director. For example, "cave" balconies or balconies that appear to be "tacked on" to the facade will not qualify for this option.
  - c) Horizontal *modulation* (upper level step-backs). To qualify for this measure, the horizontal *modulation* shall be significant as shown in figure 3-34.
  - d) *Articulation* of the building's top, middle, and bottom. This typically includes a distinctive ground floor or lower floor design, consistent *articulation* of middle floors, and a distinctive roofline.

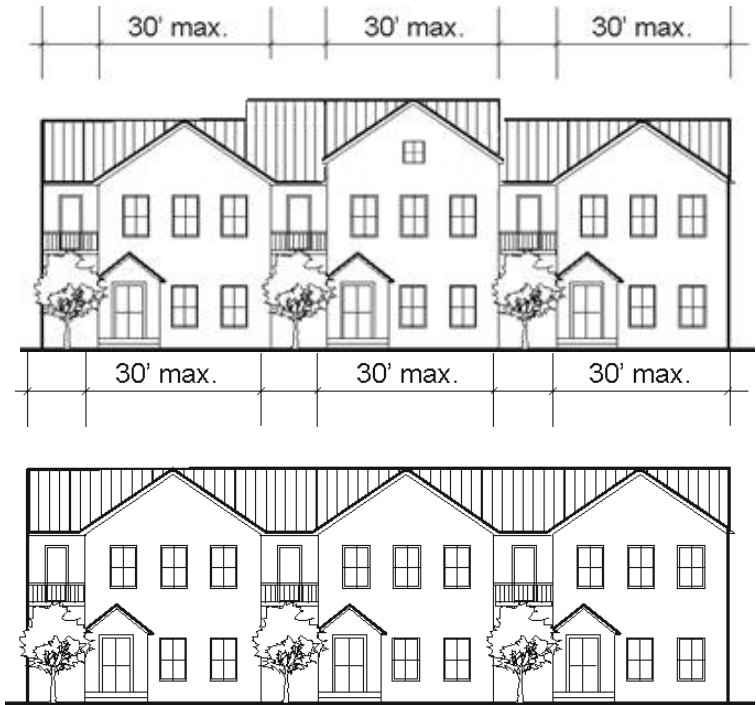


Figure 3-33. Articulate building facades at no more than 30-foot intervals.



Figure 3-34. This multifamily building uses a combination of horizontal and vertical modulation, roofline modulation, distinctive window patterns, and clear articulation of the building's top, middle, and bottom to help reduce its perceived architectural scale and add visual interest.

- 3.7.2 Façade modulation.** Buildings shall be divided by a 30-foot wide *modulation* of the exterior wall. Such *modulation* must be at least 6 feet for buildings up to 120 foot wide structure and shall increase 1 foot for every additional 10 feet of width and extend through all floors. Decks and roof overhangs may encroach up to 3 feet (per side) into the *modulation*. The Director and the Design Commission will consider other design methods that are effective at reducing the perceived length of the building. Examples could include a combination of vertical and/or horizontal building modulation with a change in building materials or finishes, a clear change in building articulation and/or fenestration technique.



**3.7.3 Diversity of building types.** Multi-building developments shall be required to provide different architectural designs to provide interest and variety. This is particularly important where multiple buildings front on the same street. Simple changes in building colors or reversal of basic facade designs are not sufficient to comply with this standard. Consider changes in vertical and/or horizontal *articulation*, *fenestration*, building materials, architectural style, and/or roof design provided they meet the Guideline 3.6.1 above and other applicable standards.



*Figure 3-36. Multi-building developments like this need greater facade variation to avoid looking like drab housing projects. At minimum, a greater variety of contrasting colors would help here.*

### **3.7.4 Roofline standards.**

- a) Single purpose residential buildings must provide a pitched roof with minimum 5:12 roof pitch. Alternative roof designs will be considered provided design elements are included to help the building and its roofline fit into the site's context.
- b) Mixed-use buildings in the NC district are encouraged to incorporate a pitched roof with a minimum 5:12 roof pitch.
- c) All buildings shall incorporate roofline *modulation*. The maximum length of any continuous roofline shall be 30 feet for single purpose residential buildings and 60 feet for mixed-use buildings. Specifically:
  - i. Other roof forms consistent with the design standards herein may satisfy this standard if the individual segments of the roof with no change in slope or discontinuity are less than 40 feet in width (measured horizontally).



Figure 3-37. Pitched roof forms with a minimum slope of 5:12 are preferred.

## 3.8 Building Details and Materials

### Intent

- ◆ To encourage the incorporation of design details into building facades that are attractive at a pedestrian scale.
- ◆ To promote the use of durable materials which are appropriate for residential use and which reduce long term maintenance costs and depreciation.

### Guidelines

**3.8.1 Details toolbox:** All multifamily buildings shall be enhanced with appropriate details. Each of the types of details listed below are worth **one point** unless otherwise noted. Multifamily buildings must achieve the equivalent of **two points** worth of architectural details from each section on their facades from the following elements:

#### Section 1

- a) Decorative porch design with distinct design and use of materials.
- b) Decorative treatment of windows and doors, such as decorative molding/ framing details around all ground floor windows and doors, bay windows, decorative glazing, or door designs, and/or unique window designs.
- c) Brick or stonework covering more than 10 percent of the facade. These finishes cannot end on an outside corner (2 points).
- d) Decorative building materials that add visual interest, including
  - i) Individualized patterns or continuous wood details.
  - ii) Decorative moldings, brackets, wave trim or lattice work.
  - iii) Decorative brick or stonework (may be in addition to the brick or stonework credits noted above if they are arranged in a decorative manner that add visual interest to the façade).

- iv) Other materials with decorative or textural qualities as approved by the Director and as recommended by the Design Commission. The applicant must submit architectural drawings and material samples for approval.

### Section 2

- a) Decorative roofline design, including multiple gables and/or dormers or other design that adds distinct visual interest.
- b) Decorative railings, grill work, or terraced landscape beds integrated along the façade of the building.
- c) Other details that meet the intent of the guidelines as approved by the Director and as recommended by the Design Commission.
- d) Decorative balcony design, such as distinctive railings.
  - d) Decorative light fixtures with a diffuse visible light source, such as a globe or “acorn” that is non-glaring or a decorative shade or mounting for each building entry on the facade.
  - c) Landscaped trellises or other decorative element that incorporates landscaping near the building entry or entries.



*Figure 3-39. This building uses brick for more than 10% of the façade, a decorative mix of materials and colors, decorative entries, and decorative windows to add visual interest.*

### 3.8.2 Window design.

- a) Windows facing the street must be transparent. At least 35-45 percent of the front façade must be transparent. At least 10 - 15 percent of the side facade must be transparent.
- b) Building facades shall employ techniques to recess or project individual windows above the ground floor at least two inches from the facade or incorporate window trim at least four inches in width that features color that contrasts with the base

building color. Exceptions will be considered by the Director where buildings employ other distinctive window or facade treatment that adds visual interest to the building.



**OK**



**OK**



**OK**

**NOT OK**

*Figure 3-40. Acceptable and unacceptable window treatments because they show attention to detail and extenuate the style of the structure.*

**3.8.3 Preferred building materials.** Building exteriors shall be constructed from high quality, durable materials. Preferred exterior building materials that reflect the City's desired traditional main street character are as follows:

- a) Brick or other stone masonry.
- b) Horizontal wood or composite siding (generally with a reveal of 5 inches or less); wider siding will be considered where there is a historic precedent.
- c) Locally sourced or produced.
- d) Other materials subject to approval by the Director and as recommended by the Design Commission.

**3.8.4 Prohibited materials.** The following materials are prohibited in visible locations unless an exception is granted by the Director based on the integration of the material into the overall design of the structure.

- a) Vinyl or plywood siding (including T-111 or similar plywood).
- b) Highly tinted or mirrored glass (except stained glass) as more than 10 percent of the building facade.
- c) Corrugated fiberglass.
- d) Chain link fencing (except for temporary purposes such as a construction site or as a gate for a refuse enclosure).
- e) Crushed colored rock/crushed tumbled glass.
- f) Non-corrugated and highly reflective sheet metal.



### 3.8.5 Special material standards:

- a) Concrete block. When used for the façade of any building, concrete blocks shall be masonry washed, split, rock- or ground-faced. To add visual interest, the use of specialized textures and/or colors used effectively with other building materials and details are encouraged. Plain concrete block or plain concrete may be used as foundation material if the foundation material is not revealed more than 3 feet above the finished grade level adjacent to the foundation wall.
- b) Other materials subject to approval by the Director and as recommended by the Design Commission.



**OK**



**OK**



**NOT OK**

*Figure 3-41. Illustration where CMU is used as a design element rather than a bland façade treatment.*

## 3.9 Landscaping and Screening

### Intent

- ◆ To reinforce and enhance the character of Sumner's multifamily residential areas.
- ◆ To screen unwanted views.
- ◆ To improve the livability of multifamily residential areas.
- ◆ To both soften the mass of multi-unit complexes and to provide usable common space for residences with resilient plantings.

### Guidelines

**3.9.1 Landscaping.** Developments are subject to SMC Chapter 18.41 requirements.

- a) *Green roofs* may be used to meet up to 50 percent of required landscaped area. Such roofs shall have a substrate depth of at least 4 inches designed to accommodate a variety of hardy, drought-resistant plant species.
- b) Permeable pavements may count for up to approximately 30 percent of the required landscaped areas based on the level of permeability and long term maintenance capabilities as determined by the Director and as recommended by the Design Commission.



Figure 3-42. Green roof example.

**3.9.2 Side and rear yard buffer requirements.** Refer to SMC for buffer to other zone or use. For MF to MF - developments shall incorporate one or more of the following design options:

- a) Provide *Landscaping Type A* at least 10 feet deep along side and/or rear property lines where a strong visual buffer to adjacent uses is desired. A screen fence up to 6 feet tall may be used in conjunction with the landscaping.



- b) Provide *Landscaping Type B or C* at least 10 feet deep along side and rear property lines where a visual separation of uses is desired. The width of the planting strip may be reduced to 5 feet if used in conjunction with a screen fence approximately 6 feet tall.
- c) Other treatments that meet the intent of the guidelines as approved by the Director and as recommended by the Design Commission. Factors that must be considered in determining the appropriate treatment include views, applicable uses, connectivity, and desired level of privacy. Some options include:
  - i) Shared pathway along or adjacent to the property line with landscaping. This is a desirable configuration that can enhance pedestrian circulation and provides an efficient use of space. This treatment requires a recorded agreement with applicable adjacent property owner(s).
  - ii) Tall privacy fence or hedge (up to 6 feet tall).
  - iii) Low screen fence or hedge (up to 3 feet tall). This may be a more attractive option where a taller fence might provide negative visual impacts.

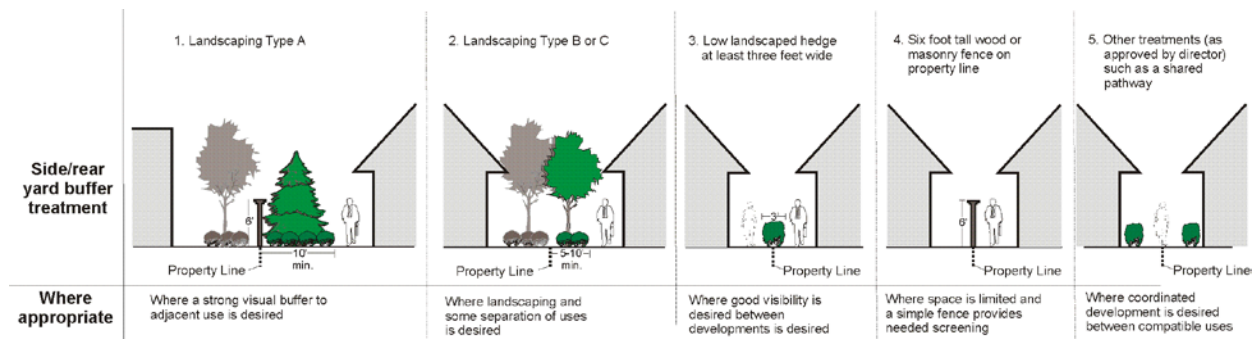


Figure 3-43. Side and rear yard design treatment options.


**3.9.3 Building perimeter planting.** All elevations must have landscaping along any exposed foundation. The landscaped area may be along the outer edge of a porch instead of the foundation. This landscaping requirement does not apply to portions of the building facade that provide access for pedestrians or vehicles to the building. The foundation landscaping must meet the following standards:

- a) Columnar trees and shrubs adjacent to building walls can provide visual relief without obscuring natural light and views for individual units.
- b) The landscaped area must be a minimum of 3 feet wide.
- c) There must be at least one 3-gallon shrub for every 3 lineal feet of foundation.
- d) Groundcover plants must fully cover the remainder of the landscaped area.




Figure 3-44. Exposed foundations like this should be landscaped with shrubs and other plantings for screening.

**3.9.4 Parking landscape:** Landscaped islands shall be required between every 8-10 stalls and should be located in front of building entranceways when applicable. Landscaping strips shall be a minimum of 5 feet. Those landscaped islands in front of building entranceways shall include 5 feet minimum of continuous landscaping. The stall adjacent to the landscape strip shall be a minimum of 12 feet wide.

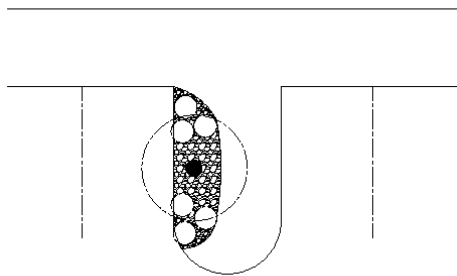

**OK**

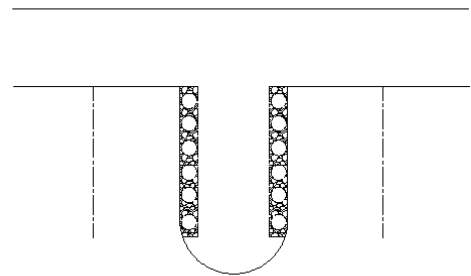

**NOT OK**

## **4. Single-Family Guidelines**

### **Introduction**

#### **Applicability**

These guidelines apply to all new detached single-family development. This includes subdivisions for detached single-family development and new homes, accessory dwelling units, or other development plans for these detached structures.

#### **Relationship to Sumner Municipal Code (SMC)**

These guidelines shall serve as a supplement to the SMC. Where there is a conflict between the guidelines herein and the standards in the SMC, these guidelines shall apply. Deviations to these standards may be presented to the Design Commission for consideration and recommendation to the Director.

## 4.1 Building Design

### Applicability

These guidelines apply to the building design of all large subdivisions (10 lots or more) for detached single-family dwellings, and ADU's, in any applicable zone within the City.

### Intent

To ensure new development is compatible with the historical character of Sumner.

To create a cohesive streetscape, massing and roof pitches while providing for a variety of housing styles.

To encourage pedestrian friendliness and protect residents' privacy through careful placement of porches, doors, windows and garages.

To encourage Crime Prevention Through Environmental Design principles.

To encourage design details, which add visual interest and encourage outdoor living spaces.

### Guidelines

#### 4.1.1 Roof design.

a)

Roofs shall have variation in roof planes in order to break up the large roof mass through dormers, gables, or changes in elevation.

b) A variety of roof forms may be used. Roof forms and roof pitches of porches, dormers and garages shall be consistent and complement the primary structure and building style.

c) Roof overhangs should be sized to provide a shadow line on the façade and protect sidewalls in accordance with the structure's architectural style.



Figure 4-10. Variable rooflines, entries, and porches.

### 4.1.2 Porches.

- a) All houses shall provide a covered entry porch at the front of the house with no dimension less than 6 feet. The porch area shall be at least 60 square feet with the wider dimension parallel to the street. Exceptions may be granted by the Director.
- b) Each dwelling unit shall have a separate designated pedestrian connection from the front door to the sidewalk with a minimum width of 3 feet. The pedestrian connection shall be separate from the driveway.

### 4.1.3 Corner lots. Structures on corner lots shall take advantage of the dual frontage, make an architectural statement, and create interest in architecture and promote human activity on the street. This can be accomplished by, but not limited to, providing one or more of the following:

- a) Wrap around porches
- b) Bay windows
- c) Varied exterior materials, roof feature, colors, and/or *articulation*. Varied materials shall be compatible with one another.



Figure 4-11. Corner lot example.

### 4.1.4 Architectural details. Dwelling units shall contain architectural details. Dwelling units must achieve a minimum of **four points** worth of architectural details on the street façade(s), and a minimum of two points on the non-street facades. Chosen details must be compatible with the architectural style of the structure.

- a) Stonework detailing on columns and/or across foundation (1 point).
- b) Brick or stonework covering more than 10 percent of the facade (2 points).
- c) Decorative window design (including stained glass or leaded glass windows). Plastic muntins are not sufficient (1 point).
- d) Decorative door design (1 point).

- e) Decorative roofline elements including roof brackets or multiple dormers (1 point).
- f) Use of complimentary siding type different from the main body siding to accent features such as gables and dormers. Example: Shingles over lap siding (1 point).
- g) Other decorative ornamentation (1 point).
- h) Distinctive architectural features such as curved bay windows (1 point).



*Figure 4-13. This homes includes stonework detailing, decorative roofline elements (multiple gables), decorative siding (shingles), and roof brackets.*

### 4.1.5 Siding materials.

- a) Siding material shall be appropriate to the architectural style of the structure.
- b) Traditional materials consistent with local and regional architectural styles are encouraged, such as wood, stone and brick.
- c) Mirrored glass, corrugated siding, exposed concrete block, and solid panel siding (plywood, T-111, or fiber cement panels) are not in keeping with the desired character of traditional regional materials and are prohibited.
- d) Siding materials and window trim should generally be consistent on all sides of structures. No “Hollywood Facades.” Hollywood facades are those where the architectural details are all on the street side of the building and not continued and consistent on all sides.





Figure 4-14. T-111 siding is prohibited.

### 4.1.6 Window design.

- Windows should be vertically oriented. Several windows can be grouped together horizontally to accent a bay or interior room.
- Houses shall incorporate window trim at least 3.5 inches in width that features color that contrasts with the base building color. Exceptions will be considered by the Director where buildings employ other distinctive window or facade treatment that adds visual interest to the building.



Figure 4-15. Good (left and middle) and bad (right) window design.

### 4.1.7 Garages and accessory structures design.

- a) Garages fronting the street shall be setback a minimum of 20 feet.
- b) The garage doors shall occupy no more than 50 percent of the ground-level facade facing the street.
- c) Where the garage faces the side yard, but is visible from the street, the garage shall incorporate a window on the street front facade so that it appears to be a habitable portion of the house. The window size and design must be compatible with the windows on habitable portions of the house.
- d) Detached garages and other accessory buildings shall not exceed 18 feet in height. Exception: Garages with ADU's may be taller (see Guideline 4.2.3).
- e) Accessory structures shall be designed consistently with the primary residence. Consistency of design includes the use of similar roofing, siding, trim, and color(s).
- f) Standards and guidelines for dwellings with garages facing a street:
  - i) Upper level dormers, where applicable, shall be used to deemphasize the garage.
  - ii) The garage door shall include trim and detail work sufficient to deemphasize its role on the building.
  - iii) A grass or grasscrete median should be provided to separate the lanes in a driveway.



Figure 4-16. Good example of a garage design, where facing the street. Note the garage door detailing.

## 4.2 Infill Single-Family Residential

### Applicability

These guidelines apply to all infill (9 lots or less) detached single-family. This section does not apply to single-family residential remodels of projects less than 50% valuation.

### Intent

To ensure that new development is compatible with the character of Sumner.

To encourage the use of design details that adds visual interest.

### Guidelines

#### **4.2.1 Siding materials.**

- a) Siding material shall be appropriate to the architectural style of the structure.
- b) Traditional materials consistent with local and regional architectural styles are encouraged, such as wood, stone and brick.
- c) Mirrored glass, corrugated siding, exposed concrete block, and solid panel siding (plywood, T-111, or fiber cement panels) are not in keeping with the desired character of traditional regional materials and are prohibited.
- d) Siding materials and window trim should generally be consistent on all sides of structures. No “Hollywood Facades.” Hollywood facades are those where the architectural details are all on the street side of the building and not continued and consistent on all sides.

## 4.3 Subdivision Design

### Applicability

These guidelines apply to all large residential subdivisions (10 lots or more). Single-family dwellings within the large-lot residential subdivision shall also comply with Subchapter 4.1, Building Design.

### Intent

To reinforce the pedestrian-oriented character of Sumner's residential neighborhoods.

To encourage visual diversity in residential developments.

To avoid *blank walls* along streets.

To encourage the appearance of adequate side-yards on lot layouts.

### Guidelines

**4.3.1 Lot diversity.** New subdivisions shall employ methods to integrate visual diversity into the design of the development. At least two of the following methods must be integrated into subdivision design. Proposed treatments must be sufficient to meet the intent of the guidelines, as determined by the Director. Options:

- a) Variable front setbacks. Even minor front setback variations can make significant impacts in reducing streetscape monotony in new developments. Setback envelopes may be noted on the plat to accomplish this.
- b) Variable lot sizes. Subdivisions can use this option if:
  - i) 15-20 percent of the proposed lots are below the minimum lot size of the zoning district as provided in SMC 18.12.070.
  - ii) Other mixtures of lot sizes meet the intent of the guidelines. To qualify, the varying lot sizes shall be mixed throughout the subdivision and not simply segregated off in separate areas. For example, corner lots are good locations for larger lots.
- c) Variable house sizes. For example, a combination of single and two-story homes helps to provide visual diversity. To qualify for this option, at least 20 percent of the homes must be single story and at least 20 percent of the homes must be two stories. Such variation also appeals to different demographics – promoting a diversity of residents. House size variation can be accomplished by providing applicable standards on lots on the plat.

Street and block layouts can also help to provide visual diversity in subdivisions. SMC 17.28.110 (Street and Block Layout) and 17.28.120 (Block Requirements) promote continuity in the surrounding street grid and small block sizes, which are consistent with historic development patterns in the City.



Figure 4-4. Variable front yard setbacks would have helped this development avoid the monotonous “housing tract” look .

**4.3.2 Alternative lot configurations.** Alternative lot configurations may be considered to provide flexibility in lot layout and to provide more usable open space.

a) Zero lot line.

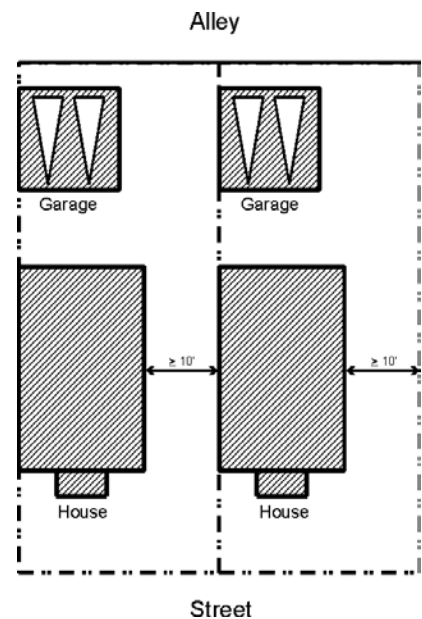


Figure 4-5. Zero lot line configurations are encouraged for small lot single family developments as they provide an efficient layout that maximizes usable open space on the lot.

b) Courtyard access lots. This refers to a single-family detached dwelling unit located on an interior lot that features vehicular access from a “Courtyard Access” drive located on an easement. The term “Courtyard Access Development” includes both



the lots served by the Courtyard Access and the streetfront lots on which the Courtyard Access passes through. Standards:

- i) Maximum number of lots served by a courtyard access: Five (this includes lots fronting the street on either side of the courtyard access).
- ii) Maximum length of a courtyard access: One-hundred feet (or deeper if approved by the local fire department).
- iii) Surface width of courtyard access: Twelve feet. Due to the limited length, wider drives are unnecessary (safety and function) and undesirable (aesthetics).
- iv) An easement of twenty feet in width shall be secured over the applicable parcels to allow lots legal access to the public street. A maintenance agreement shall be required for all applicable lots and must be recorded on the final plat.
- v) Courtyard access lots shall meet applicable single-family design guidelines in Subchapters 4.1 and 4.6 herein, except that lots not adjacent to a public street shall be exempt from Guideline 4.1.4 provided the garage does not face the public street.
- vi) Courtyard access lots not adjacent to a public street do not require a defined front yard. They may be configured with three side yards and one rear yard. Setback minimums shall be noted on the plat.

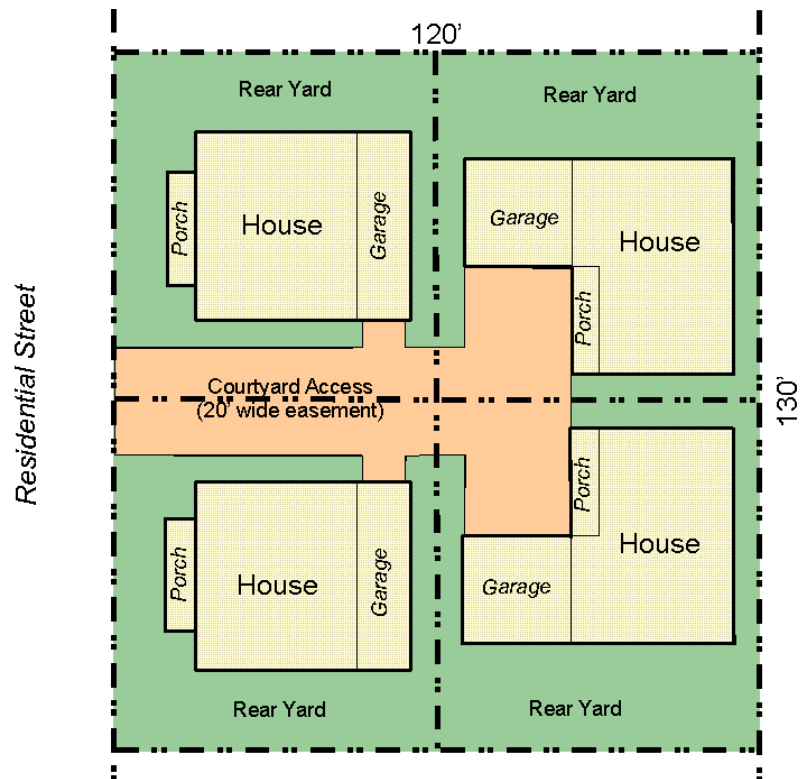


Figure 4-6. An example courtyard access development configuration.





*Figure 4-7. There are a number of good courtyard access lot configurations built within the region. Note how the garages of the rear lots aren't visible from the street.*

**4.3.3 Variety of housing types – architectural styles.** Buildings shall achieve a variety of design through the use of different architectural styles, variations of the same architectural style, and through the use of multiple design elements. The larger the subdivision, the greater the number of different façade elevations that shall be used. To qualify as a distinct façade elevation, **at least five** of the following shall apply as determined by the Director and as recommended by the Design Commission:

- Different roofline configuration.
- Different color palette.
- Different porch/entry design.
- Different window openings.
- One and two-story houses.
- Different exterior materials (including different roofing materials).
- Different garage location, configuration, and design.
- Different façade detailing.

Architectural variety standards:

- a) No two identical façade elevations may be adjacent.
- b) 10-19 homes = at least 4 different façade elevations.
- c) 20-39 homes = at least 5 different façade elevations.
- d) 40-69 homes = at least 6 different façade elevations.
- e) 70 or more homes = at least 7 different façade elevations.
- f) Alternative façade variations will be considered provided design elements are included that provide desired visual diversity. For example, a combination of variable setbacks, lot sizes, street/block layouts, and color palettes may reduce the need for a large number of different façade elevations.



*Figure 4-8. Examples of different façade elevations. Note how the floor-plans appear to be relatively similar, but each home has different porch design, color, roofline, window treatment, and façade detailing.*

**4.3.4 Landscaping along Street Side Yard Fences.** Lot configurations where unscreened fences back up to streets are prohibited. Where side or rear yards abut a street right-of-way or common internal access roadway, a planting strip shall be provided between the sidewalk and any fence. For fences alongside yards at the end of a block, a 3-foot planting strip with shrubs and groundcover is required. Where more than one house backs up to a public right-of-way, planting strips at least 5 feet wide with a combination of trees, shrubs, and groundcover sufficient to screen the fence are required (10 feet wide along arterials). Landscaped area and fence location shall be noted on the plat.



*Figure 4-9. Fences along a side yard at the end of a block shall be set back at least 5 feet to provide space for landscaping in front of the wall.*

**4.3.5 Cul-de-sac streets.** The use of cul-de-sac streets should be avoided wherever possible and shall be limited unless the applicant can successfully demonstrate that an alternative circulation pattern is not feasible. If cul-de-sacs are necessary, the end of each cul-de-sac shall provide a pedestrian walkway and bikeway between private parcels to link with an adjacent cul-de-sac, street, and/or park, school, or open space area, as determined by the Director and as recommended by the Design Commission.

## 4.4 Accessory Dwelling Units (ADU)

### Applicability

These guidelines apply to all ADUs in any applicable zone within the City. Accessory dwelling units shall also comply with Subchapter 4.4, Building Design.

### Intent

To ensure that ADUs minimize negative impacts to the neighborhood.

To limit the bulk and size of ADUs buildings in relation to the neighborhood.

To protect privacy of adjacent yards and outdoor spaces.

To provide opportunities for affordable housing.

### Guidelines

**4.4.1 SMC zoning standards for accessory dwelling units.** Accessory dwelling units are subject to the provisions of SMC subsection 18.12.030(A) (permitted as an accessory use in Low Density Residential Districts).

**4.4.2 Design and Materials.** An accessory dwelling unit shall be designed to maintain the appearance of the main building of the single-family residence.

- a) ADUs that extend beyond the current footprint of the principal residence and detached ADUs shall be consistent with the existing roof pitch, siding and windows of the main building.
- b) Only one entrance for the main building shall be permitted in the front of the principal residence. The entrance for the accessory dwelling unit shall be located either off the rear or side of the building or located within a garage out of view from the street.

**4.4.3 Height.** Detached accessory dwelling units shall have an approximate building height of 16 feet for gabled, hipped and gambrel roofs and 12 feet for flat and mansard roofs, except that the height may be increased to match the existing roof pitch of the principal structure. In no case shall the second story contain exterior walls exceeding 5 feet in height on more than 50% of the perimeter of the second story.

**4.4.4 Setbacks.** Setbacks for detached ADUs should be flexible and allow for an increase or decrease depending on the context of the neighborhood. For example, a setback may be increased if it is determined that privacy of adjacent yards would be impacted or views blocked. Conversely, setbacks may be decreased to the minimum allowed if existing landscaping or accessory structures effectively screen adjacent yards.

Refer to the Zoning Code (SMC 18.12.030) for minimum setbacks for Accessory Dwelling Units.

Minimum yard setbacks for detached accessory dwelling units are as follows:

- a.)** Front yard setback in feet: Equal to or greater than existing setback of the principal structure or the required setback, whichever is greater;
- b.)** Rear yard setback in feet: 5, except when the rear property line is abutting an alley then 5 feet or that required for garage ingress and egress per SMC 18.12.080(E);
- c.)** Interior side yard in feet: 5, or if the interior side property line is abutting an alley with vehicular access to a garage, then the setback is per SMC 18.12.080(E); and
- d.)** Street side yard in feet: Same as required for the principal structure.

**4.4.5 Window Size and Placement.** Windows should be placed in locations that reduce privacy impacts and views into adjacent yards.

- a) Windows in living, dining, and great room areas located on the second story should face interior to the site.
- b) Window area above the first floor should remain in proportion with the wall plane of proposed structure for all windows on all sides.



# 5. Industrial Guidelines

---

## Contents

5. Industrial Guidelines ..... 1

    5.1 Site Design and Parking ..... 2

    5.2 Building Design..... 5

    5.4 Landscape Design ..... 5

## Applicability

These guidelines apply to permitted industrial development in addition to certain conditionally permitted commercial uses in the M-1 and M-2 zones as set forth in the Sumner Municipal Code. The Director shall review any proposed conditionally permitted commercial use to determine which section of the Sumner Design and Development Guidelines apply. If the Director determines that the Commercial Design Guidelines are more applicable for a particular use, then compliance with those guidelines is mandatory.

These guidelines are intended to address the unique site conditions presented in industrial developments. These conditions partially arise from market preferences and construction techniques. For example, many structures are large concrete “tilt-up” buildings, generate heavy amounts of truck traffic, require large expanses of paved area, are isolated from other land uses, and are located on major or minor arterials. These special considerations lead to a specific set of design guidelines for the manufacturing districts.



## 5.1 Site Design and Parking

### Intent

- ◆ To allow adequate vehicular and pedestrian access to the structures while encouraging safe and pleasant environments for pedestrians moving between cars, heavy trucks, rail, and transit within and around the site.

### Guidelines

- 5.1.1 Public street layout.** All public streets shall meet the design standards set forth in the Sumner Municipal Code to the satisfaction of the City Engineer. Sumner desires to create a connected roadway network which utilizes the block grid layout. The preferred maximum block length in the manufacturing zones is 1320 feet. The overall street layout shall be designed in accordance with the guidelines, intent, and policy statements of the Sumner Comprehensive Transportation Plan.
- 5.1.2 Private street layout.** The use of private streets is discouraged. Refer to the Sumner Municipal Code to note the street frontage requirements for new parcels when considering an industrial subdivision. Private streets shall be designed to reinforce the existing block grid layout, but shall not be used to calculate maximum block length. Private streets shall be designed and constructed to the standards established and approved by the City Engineer.
- 5.1.3 Vehicular maneuvering areas.** Vehicular maneuvering areas are the spaces around buildings, in parking lots, entranceways, and loading areas. These areas function as routes of vehicular travel, including fire access, and shall contain safety measures designed to adequately separate various modes of travel. Vehicular maneuvering areas should be designed to reinforce the existing block grid layout, but shall not be used to calculate maximum block length.
- 5.1.4 Orientation.** The front elevation of the building should face the primary street depending on the site conditions. The primary building entrance and any associated offices and/or sales areas shall be located on the front elevation. All of the following items should be utilized on the front elevation:
- a) Windows, with awnings and trim.
  - b) Wall modulation.
  - c) Material and/or color changes on building facade.
  - d) Architectural details such as a parapet, weather protection, relief sculpture, etc.
  - e) Pedestrian amenities, such as benches, tables, and patio areas.
- Other features to consider on the front elevation include, but are not limited to, internal downspouts, monument signage, plazas, paving material changes, water features, and open space.

- 5.1.5 Loading, service, and refuse areas.** No loading or servicing should be conducted between a building and any public street. Loading bays should be located on a building elevation not facing a public street. All refuse containers should be located in the rear or side of the lot or loading or service areas, and shall be placed out of sight from any public street or sidewalk through adequate screening. Special conditions may apply in limited circumstances, including, but not limited to, corner lots, economic viability, and lot configuration. These situations will be reviewed on an individual basis by the Director. In these cases, additional landscape screening may be required. Refer to the “Landscape Design” section of these guidelines.

Loading bays should be designed to minimize the potential for pollutants to mix with stormwater. Covering of loading bays should be considered.

- 5.1.6 Driving and off-street parking area surfacing.** All off-street parking areas and vehicular travel ways shall be surfaced with asphalt or concrete. In some instances, alternative paving systems, such as modular paving or pervious pavement, may be used to substitute for asphalt or cement. Use of this alternate material may result in reductions being applied toward impervious surface fees.

- 5.1.7 Outdoor storage.** Outdoor storage as a principal use shall conform to the standards set forth in SMC 18.18.025. Generally, the material being stored shall not be visible from freeways and principal or minor arterials, public streets, railroads, and future or present bicycle/pedestrian paths. Visibility shall be reduced by constructing a 6-foot fence or masonry wall and a fully landscaped buffer the width of the applicable required setback. The buffer shall include at least a 5-foot high earth berm and at least 50 percent evergreen trees at least 6 feet in height at planting.

Deciduous trees shall be a minimum of 2 1/2-inch caliper measured at dbh. All trees shall be planted no less than 20 feet apart on center. For every 100 square feet of buffer area, at least one evergreen shrub of a minimum size of 2 feet shall be provided. Groundcover of a minimum 2-gallon size shall be planted in the buffer area sufficient to cover the area within three years of planting. Outdoor storage shall also be screened from adjacent properties, except those zoned M-2, with a minimum of a 12-foot buffer containing evergreen trees as specified above at the ratio of one tree per 30 lineal feet of buffer. In all cases, a fencing and landscape plan is required for approval recommendation by the Design Commission.

Outdoor storage as an accessory use is subject to the above standards and certain size limitations. Storage of material is not allowed between a building and the street, and the storage area shall not exceed 40 percent of the building footprint or 15 percent of the lot area, whichever is less.

- 5.1.9 Fences and walls.** Fences and walls located within a front yard setback or a street side yard setback shall not exceed 4 feet in height, if the fence or wall affords 50 percent visibility, or 3 feet in height, if the fence or wall affords zero visibility (solid). Any fence or wall located in the interior side or rear yard setback may be constructed to a height not to exceed 6 feet. A fence exceeding 6 feet in height may be constructed within the legal building area only if a building permit is sought. Fences utilizing razor wire are

measured from the top of the wire. All fences are required to meet the applicable sight distance requirements.

- 5.1.10 Utility installation.** All above-grade utility appurtenances, including telephone pedestals, utility meters, transformers, etc., shall be adequately screened from existing or future streets and trails. Screening these items can be accomplished through landscaping. If the location of any above-grade utility appurtenance is known, it shall be indicated on the required landscape plan.



*Figure 5-14. Avoid exposed utility meters along the sidewalk, like this.*

- 5.1.11 Access and curb cuts.** Combining driveway access points to parking lots and reducing the number of curb cuts is encouraged.
- 5.1.12 Location of off-street parking.** When possible, off-street passenger vehicle parking should be located away from the loading and service areas of buildings. Please refer to the “Pedestrian circulation” section of these guidelines in instances where conflicts may occur between pedestrians and vehicular traffic.
- 5.1.13 Pedestrian circulation.** The manufacturing districts are heavily dependent upon truck, rail, and automobile transportation modes; however, safe pedestrian access and circulation are necessary. Specifically, pedestrian access shall connect public sidewalks and parking areas to the primary building entrance through stamped concrete, material changes, or other means. Please refer to the “Pedestrian walkways” section of the Landscape Design section of these guidelines.

## 5.2 Building Design

### Applicability

These guidelines do not intend to promote any particular architectural theme.

### Intent

- ◆ To increase developer flexibility while visually reducing the height, bulk, and any large expanse of undifferentiated wall surface.
- ◆ To screen necessary equipment and enhance primary building entranceways.

### Guidelines

- 5.2.1 Massing, height, walls.** There are many techniques available to reduce the visual bulk and height of large manufacturing and distribution structures, such as horizontal banding, material and/or texture change, windows, color variation, landscaping (see “Landscape Design” below), setbacks, wall modulation, and others. These techniques shall be used to the satisfaction of the Design Commission to reduce the visual bulk and height of structures.
- 5.2.2 Entranceways.** These entranceways should be areas of refuge from adverse weather conditions for employees and pedestrians. The main theme of designing an entranceway is to create a pedestrian-friendly portion of a structure which is otherwise constructed on a non-pedestrian scale. The primary entrances to structures, including all entrances to individual tenant spaces, shall be clearly delineated through architectural design. This design should be distinctively different from the architecture of the remainder of the building. Specific architectural treatments to consider include, but are not limited to, wall modulation, gables, window clusters, landscape treatment, material/color/texture change, awnings, moldings, signage, paving texture, planters, and pedestrian amenities such as benches and tables.
- 5.2.3 Necessary equipment and facilities.** Objects such as rooftop equipment, air ducts, water towers, storage tanks, processing equipment, cooling towers, vents, and any other improvement or equipment shall be compatible with the building architecture (color and/or material) or screened from adjacent properties, public streets, freeways, railroads, and sidewalks when possible. It is recognized that some manufacturing uses may have equipment and structures visible from the street and sidewalk in spite of screening.

## 5.4 Landscape Design

### Applicability

### Intent

- ◆ To lessen the visual bulk from a public vantage point of large manufacturing/distribution structures, maintain a consistent streetscape, and screen items such as off-street parking, outdoor storage, large expanses of undifferentiated wall surface, and refuse/utility facilities.

## Guidelines

- 5.4.1 Front and street side yard setback.** A 4-foot-tall and 12-foot-wide landscape berm is required between the street and the off-street parking. Exceptions to this rule may apply in areas where the performance of water quality facilities incorporated into the street design would be adversely impacted. (Please refer to the “Site design and parking” section of these guidelines.)

Landscape berms shall be planted using a hierarchy of landscape types meant to screen off-street parking, 40% shall be evergreen. First, trees shall be planted at spacing intervals consistent with the mature tree breadth. Tree types are encouraged to be mixed. Second, evergreen shrubs shall be used to provide solid screening between the top of the berm and the bottom of the tree crown. Third, groundcover shall be used to prevent wind and water erosion. Groundcover can consist of plantings other than grass provided 100 percent coverage is obtained within three years. In no case shall non-living material used as groundcover exceed 25 percent coverage. In some instances, a pedestrian walkway may be required for access between the sidewalk and the primary building entrance.

Where streets have been designated for a particular street tree, planting types and spacing standards shall be consistent with the Street and Public Tree section of the Sumner Municipal Code and Ordinance Number 1846. Existing trees shall be retained unless they are unhealthy, cause health hazards to public safety, or cannot be reasonably retained due to specific site locations.

Note: Fences will not be allowed on top of berms.

- 5.4.2 Interior and rear yard setbacks.** All side yards located between the street and the building façade shall be landscaped to the satisfaction of the Design Commission and shall include at least one single row of trees planted at a minimum of 20 feet on center unless the side yard is utilized as a shared maneuvering/loading area with an abutting property. Side yards are encouraged to be used for water quality features, such as grassy swales, if required by other City ordinances; however, landscaped groundcover is not specifically required in the interior and rear yard setbacks. If water quality features are constructed, the tree requirement remains in effect, but a water-tolerant species shall be selected.

- 5.4.3 Parking areas.** Parking areas shall be screened from public streets and arterials as described above in the “Front and street side yard setback” section. One tree is required for every six automobile parking spaces provided. Within parking lots containing more than two rows of parking spaces, trees shall be planted in planting beds at least 8 feet wide within the interior of the parking lot. The requirements for these planting beds are as follows:

- a) Trees shall be planted no more than 25 feet on center.
- b) There shall be at least one shrub for every 20 square feet of landscape strip.
- c) The ground shall be covered with a hardy, fast-growing planting.

Additional planting bed dimensions and other requirements are found in City ordinances.

**5.4.4 Building perimeter.** For any structure exceeding 30 feet in height and any un-modulated wall exceeding 100 feet in length, not including loading or office/sales areas, a hierarchy of plantings is required. First, suitable trees, such as columnar forms, shall be planted at a minimum of 15 feet on center within a minimum 6-foot-wide planting bed at the structure foundation/base. Second, a planting ranging from 1 to 6 feet in height at maturity shall be planted at a minimum of 6 feet on center within the planting bed. Third, groundcover or non-living material shall be installed to reduce the possibility of wind and water erosion.

**5.4.5 Special landscaped setbacks.** Minimum setbacks shall be determined by SMC 18.18 as described in the “Site design and parking” section of these guidelines; however, increased setbacks may be required when manufacturing zoned property abuts non-manufacturing-zoned property. Please refer to the following table.

	Residential	Commercial
<b>M-1</b>	25 feet	5 feet
<b>M-2</b>	35 feet	5 feet

The required setbacks in the above table shall be densely vegetated. In addition to the required landscaped setbacks, the building setback shall not be less than 50 feet (SMC 18.18).

**5.4.6 Pedestrian walkways.** Pedestrian walkways between the street/parking areas and the structure shall be designed to minimize conflict with any major automobile and truck traffic routes. The walkways shall include pedestrian-scale lighting, stamped concrete, material changes, and landscaping which helps to identify the route as a pedestrian-only area.

**5.4.7 Sumner/Pacific Master Trail Plan.** Any site identified in the Sumner/Pacific Master Trail Plan shall incorporate the trail requirements, and landscaping features to screen parking, impervious surface, loading areas, and refuse/mechanical facilities from the present or future trail to the satisfaction of the Design commission.

**5.4.8 Bicycle parking.** Bicycle parking shall be provided in convenient locations to the building entrances at the minimum ratio of one bicycle parking space for each twenty spaces dedicated for use by automobiles. Parking opportunities may be provided in racks or other, similar facility, but in all cases the facility shall be covered and located on a paved surface. Indoor bicycle parking may be considered.

**5.4.9 Conservation of resources.** In order to reduce water usage native plantings are encouraged. An applicant could receive a stormwater fee reduction through using modular paving materials.



